

PRECAUTIONARY STATEMENTS

WARNING

Hazardous to Humans and Domestic Animals.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply in marine and/or estuarine oil fields. Do not discharge into lakes, streams, ponds or public waters unless in accordance with an NPDES permit. For guidance contact your Regional Office of the EPA.

DIRECTIONS FOR USE

GENERAL CLASSIFICATION

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

STORAGE AND DISPOSAL

1. PROHIBITIONS

Do not contaminate water, food, or feed by storage or disposal open dumping's prohibited.

2. PESTICIDE DISPOSAL

Pesticide, spray mixture, or rinsate that cannot be used or chemically processed should be disposed of in a landfill approved for pesticides or buried in a safe place away from water supplies.

3. CONTAINER DISPOSAL

(a) Reseal container and offer for reconditioning, or
(b) Triple rinse (or equivalent) and offer for recycling, reconditioning, or disposal in approved landfill, or bury in a safe place.

4. GENERAL

Consult federal, state or local disposal authorities for approved alternative procedures.

AQUATREAT SDM

ACTIVE INGREDIENTS	40%
Sodium Dimethyldithiocarbamate	40%
INERT INGREDIENTS	60%
TOTAL	100%

KEEP OUT OF REACH OF CHILDREN

WARNING

Causes eye and skin irritation. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful if swallowed. Avoid contamination of food.

STATEMENT OF PRACTICAL TREATMENT

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse.

If swallowed, drink promptly a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Call a physician immediately.

See Side Panel For Additional Precautionary Statements.



Manufactured by:

ALCO CHEMICAL CORPORATION

909 Mueller Drive
Chattanooga, Tenn. 37406
Phone: 615-629-1405

E.P.A. Establishment No. 31910-TN-1

E.P.A. Registration No. 31910-6

Net Contents: Liquid


See Markings on Top of Drum for Net Weight.

SECONDARY AND TERTIARY OIL RECOVERY

AQUATREAT NM is a highly effective Microbiocide for controlling the growth of fungi and bacteria found in secondary and tertiary petroleum recovery waterflood systems.

AQUATREAT SDM can be injected directly from the shipping container. It should be thoroughly mixed into the produced water, fresh or salt water or commingled water of the secondary or tertiary oil recovery waterflood systems for effective microorganism control. It may be diluted with water before injection.

AQUATREAT SDM is used at the rate of 0.87 fluid oz. to 1.7 pints per 1,000 gallons of water for effective microorganism control.

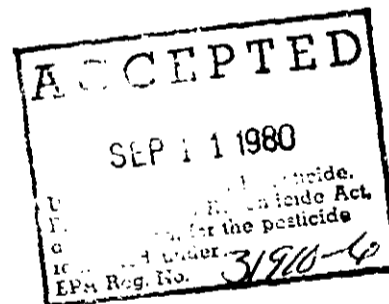

Seller makes no warranty, expressed or implied, concerning the use of this product other than indicated on the label. Buyer assumes all risk of use and/or handling of this material, when such use and/or handling is contrary to label instructions.

ALCO CHEMICAL CORPORATION
909 MUELLER DRIVE



CHATTANOOGA, TENNESSEE 37406
TELEPHONE 615-629-1405

ALCOGUM SODIUM POLYACRYLATE IN SITU THICKENERS VULCACURE RUBBER CHEMICAL ACCELERATORS

VULNOPOL POLYMERIZATION SHORTSTOPS ALCOSPERSE DISPERSANTS AND STABILIZERS AQUATREAT WATER TREATMENT CHEMICALS

Technical Bulletin

ACCEPTED
SEP 11 1980
U.S. Environmental Protection Agency
Fungicide Registration Act
Registered for the Fungicide
EPA Reg. No. 31916-6

TB-2109
April 30, 1980

AQUATREAT SDM

SECONDARY OIL RECOVERY MICROBICIDE

AQUATREAT SDM is a highly effective Microbiocide for controlling the growth of fungi and bacteria found in petroleum secondary and tertiary recovery waterflood systems.

TYPICAL PROPERTIES

Active Ingredients

Sodium Dimethyldithiocarbamate.....	40.0%
Inert Ingredients.....	60.0%
pH.....	12.0 ± 1
Density.....	1.12 - 1.21
Weight per U.S. gallon.....	9.85 pounds
Color.....	Nearly colorless to pale yellow-green.

DIRECTIONS FOR USE

AQUATREAT SDM can be injected directly from the shipping container. It should be thoroughly mixed into the produced water, fresh or salt water or commingled water of the secondary or tertiary oil recovery waterflood systems for effective microorganism control. It may be diluted with water before injection.

AQUATREAT SDM is used at the rate of 0.87 fluid oz. to 1.7 pints per 1000 gallons of water for effective microorganism control.

The suggestions contained in this bulletin are based on data which are believed to be reliable. Because operating conditions in the use of our products are beyond our control, we assume no liability for any method, manner of use or any formulas utilized by a consumer. No patent liability is assumed for any method, manner of use or any formulas utilized by a consumer.

BEST DOCUMENT AVAILABLE