

COMPOSITION	
Active Ingredients	17.5%
Disodium Cyanodithioimido- carbonate	7.35%
Potassium N-methyldithio- carbarr.ate	10.15%
Inert ingredients	82.5%
Weight per gallon	9.31 lbs.
Weight of active ingredients per gallon	1.63 lb.



WARNING
KEEP OUT OF THE REACH
OF CHILDREN

Causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.

FIRST AID: In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse.

If swallowed, give patient doses of powdered charcoal immediately or all he can swallow of raw egg whites, milk, gruel, or flour and water. Then induce vomiting with salt, soap, or mustard in warm water. Call a physician immediately.

Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public water. Apply this product only as specified on this label.

GESSCOCIDE 12

APPLICATIONS—GESSCOCIDE 12 is used to inhibit the growth of algae, bacteria, and fungi in recirculating commercial and industrial cooling water systems. Before treatment with GESSCOCIDE 12, systems must be cleaned to remove algal growth, microbiological slime, and other deposits. Then the system should be treated with an initial slug addition of 3.3 to 6.6 fluid ounces of GESSCOCIDE 12 per 1,000 gallons of water in the system. Repeat the initial dosage until control is evident. Subsequent slug additions of 1.1 to 6.6 fluid ounces of GESSCOCIDE 12 per 1,000 gallons of water should be made every 1 to 5 days or as needed. The required frequency of treatment depends on the relative amount of bleedoff and the severity of the microbiological problem. Slug additions of GESSCOCIDE 12 should be made to the sump of water cooling towers.

Mfg. No. 31964 — La-1

EPA Registration Number 31964-6

GESSCO Sales Division
Gulf Engineering Co., Inc.

NEW ORLEANS - HOUSTON - NEW IBERIA - SHREVEPORT



ACCEPTED

AUG 7 1971

UNDER THE FEDERAL INSECTICIDE AND RODENT ACT

REG. NO. 31964-6

ACCEPTED

PROMISE

WARNING

KEEP OUT OF THE REACH OF CHILDREN

Causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.

FIRST AID: In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse.

If swallowed, give patient doses of powdered charcoal immediately or all he can swallow of raw egg whites, milk, gruel, or flour and water. Then induce vomiting with salt, soap, or mustard in warm water. Call a physician immediately.

Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public water. Apply this product only as specified on this label.

GESSCOCIDE 12



APPLICATIONS—GESSCOCIDE 12 is used to inhibit the growth of algae, bacteria, and fungi in recirculating commercial and industrial cooling water systems. Before treatment with GESSCOCIDE 12, systems must be cleaned to remove algal growth, microbiological slime, and other deposits. Then the system should be treated with an initial slug addition of 3.3 to 6.6 fluid ounces of GESSCOCIDE 12 per 1,000 gallons of water in the system. Repeat the initial dosage until control is evident. Subsequent slug additions of 1.1 to 6.6 fluid ounces of GESSCOCIDE 12 per 1,000 gallons of water should be made every 1 to 5 days or as needed. The required frequency of treatment depends on the relative amount of bleedoff and the severity of the microbiological problem. Slug additions of GESSCOCIDE 12 should be made to the sump of water cooling towers.

Mfg. No. 31964 - La-1

EPA Registration Number 31964-6

GESSCO Sales Division Gulf Engineering Co., Inc.

NEW YORK • NEW YORK • NEW YORK • NEW YORK • NEW YORK

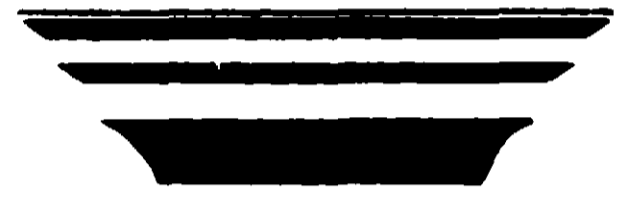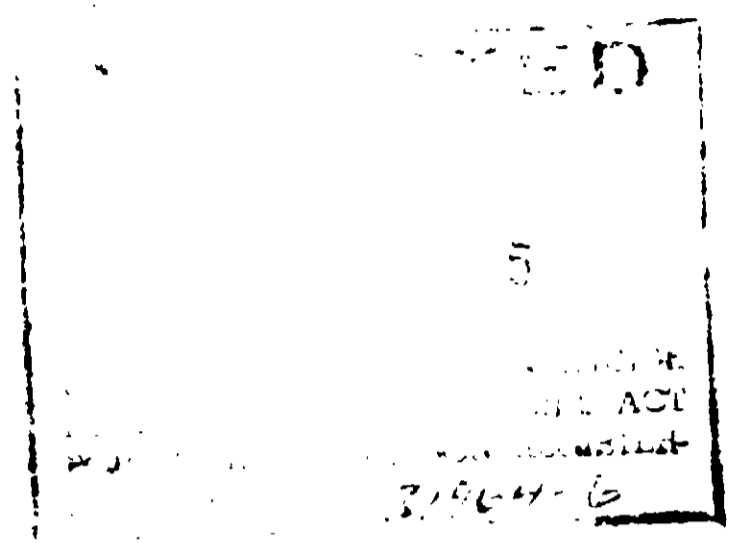

COMPOSITION

Active Ingredients	17.5%
Disodium Cyanodithioimido- carbonate	7.35%
Potassium N-methyldithio- carbamate	10.15%
Inert ingredients	82.5%
Weight per gallon	9.31 lbs.
Weight of active ingredients per gallon	1.63 lb.

WARNING
KEEP OUT OF THE REACH
OF CHILDREN

Causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.

FIRST AID: In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse.

If swallowed, give patient doses of powdered charcoal immediately or all he can swallow of raw egg whites, milk, gruel, or flour and water. Then induce vomiting with salt, soap, or mustard in warm water. Call a physician immediately.

Do not reuse empty drum. Return to drum conditioner or destroy by perforating or crushing and burying in a safe place.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public water. Apply this product only as specified on this label.

GESSCOCIDE 12

APPLICATIONS—GESSCOCIDE 12 is used to inhibit the growth of algae, bacteria, and fungi in recirculating commercial and industrial cooling water systems. Before treatment with GESSCOCIDE 12, systems must be cleaned to remove algal growth, microbiological slime, and other deposits. Then the system should be treated with an initial slug addition of 3.3 to 6.6 fluid ounces of GESSCOCIDE 12 per 1,000 gallons of water in the system. Repeat the initial dosage until control is evident. Subsequent slug additions of 1.1 to 6.6 fluid ounces of GESSCOCIDE 12 per 1,000 gallons of water should be made every 1 to 5 days or as needed. The required frequency of treatment depends on the relative amount of bleedoff and the severity of the microbiological problem. Slug additions of GESSCOCIDE 12 should be made to the sump of water cooling towers.

Mfg. No. 31964 — La-1

EPA Registration Number 31964-6

GESSCO Sales Division
Gulf Engineering Co., Inc.

NEW ORLEANS - HOUSTON - NEW IBERIA - BREVESPORT

COMPOSITION

Active Ingredients 17.5%

Disodium Cyanodithiocimido-
carbonate 7.35%

Potassium N-methyldithio-
carbamate 10.15%

Inert ingredients 82.5%

Weight per gallon 9.31 lbs.

Weight of active ingredients
per gallon 1.63 lb.

ESSCOCIDE 12

ESSCOCIDE 12 is used to inhibit the growth of algae, bacteria,
and fungi in circulating commercial and industrial cooling water systems. Before