

ACCEPTED


32273-1

MAR 17 1961

U.S. DEPARTMENT OF AGRICULTURE

FOREST SERVICE

**BEHR** 

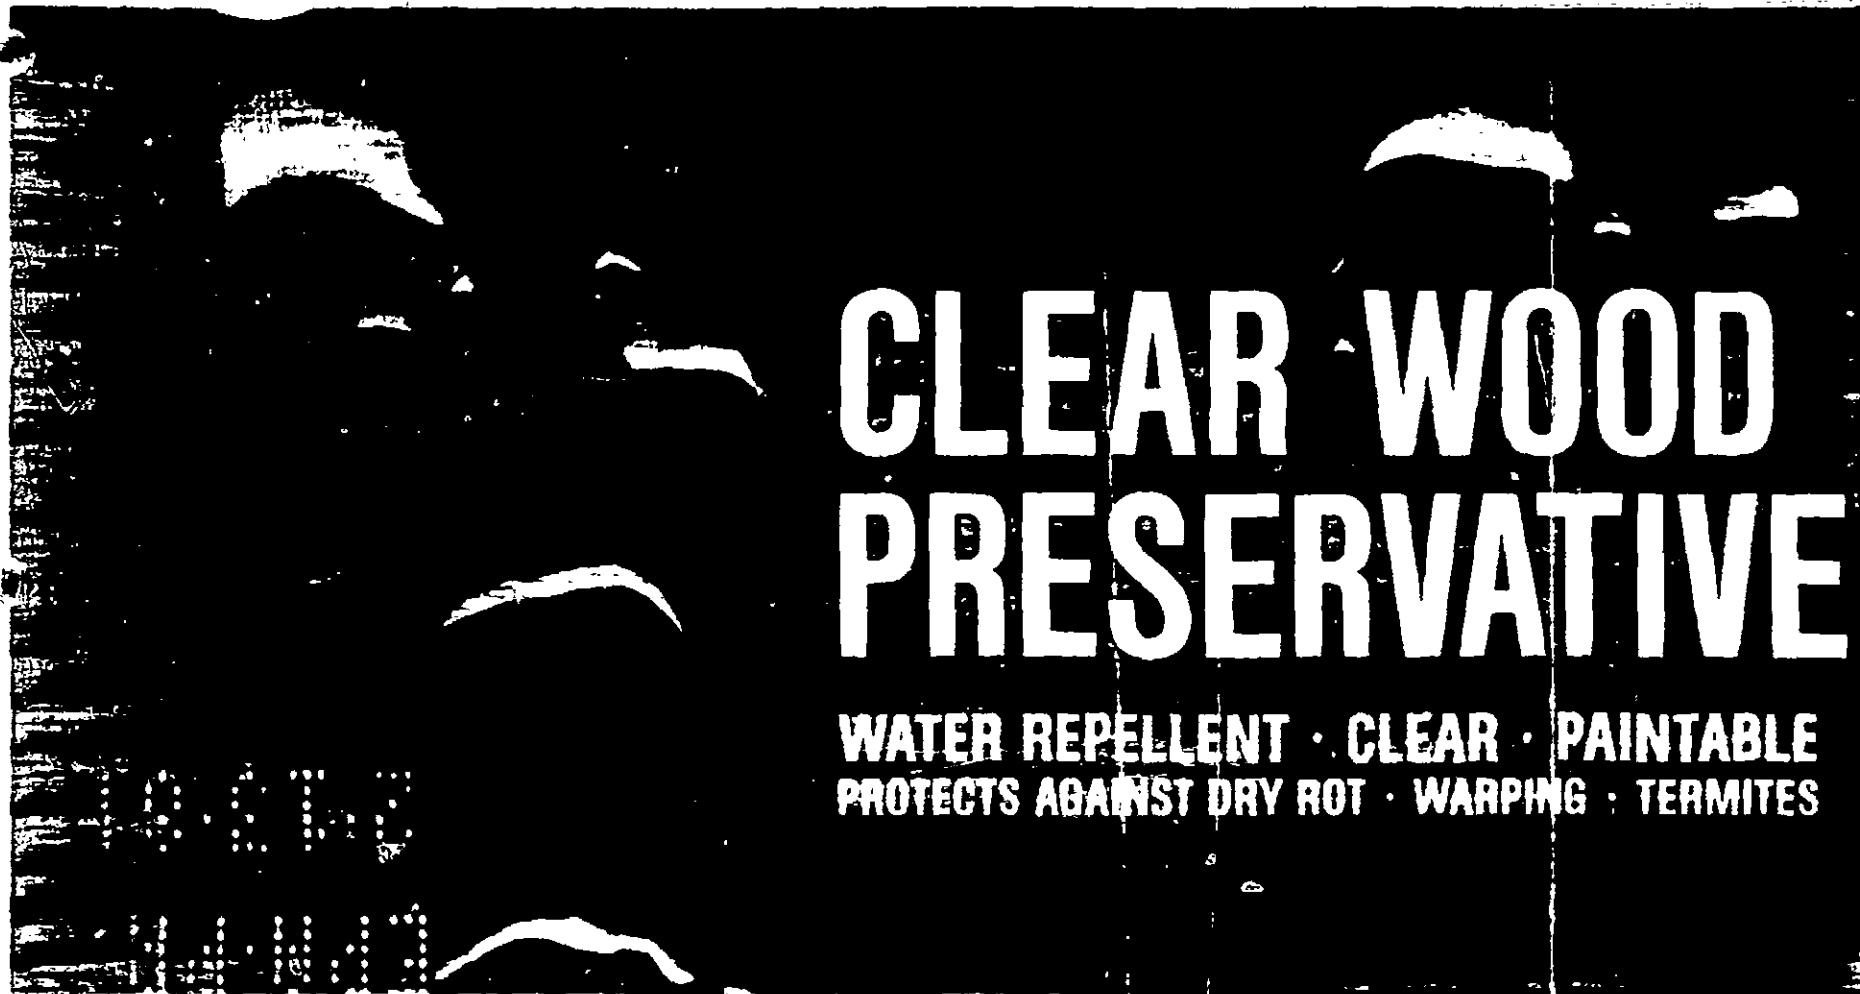

# CLEAR WOOD PRESERVATIVE

WATER REPELLENT · CLEAR · PAINTABLE  
PROTECTS AGAINST DRY ROT · WARPING · TERMITES

D

# BEHR



## CLEAR WOOD PRESERVATIVE

WATER REPELLENT · CLEAR · PAINTABLE  
PROTECTS AGAINST DRY ROT · WARPING · TERMITES

**DESCRIPTION:** Behr exterior of homes, o wood, regardless of wood will come in c and prevent moss g and aids water repe **APPLICATION:** For t to construction.

The best method to a ture of the preservati be coated must be ch dip time for each inc When dipping is not p spray. Be sure to th allow Behr Wood Pre: Surround the entire : from around the foun below the top of the fi cide sprayer, apply 5

**LIMITED WARRANTY:** METHODS, NO GUARA PRODUCT IS DEFECTIVE OPTION. LABOR COSTS PRICE OF THE MATERI

Causes skin irritatio Harmful or fatal if sw do not use or mix inc lumber. This product equipment or dispos water. Remove and w physician. Internal; f object. Do not induce pour, spill or store ne and put in trash colle

**IMPORTANT.****INSTRUCTIONS****DO NOT OPEN CAN WITHOUT READING ALL INSTRUCTIONS**

**DESCRIPTION:** Behr Wood Preservative No. 91 can be used on the exterior of homes, out-buildings, farms, fences, decks and all new wood, regardless of the final finish to be used\*; especially where wood will come in contact with moisture, rain or soil. No. 91 will kill and prevent moss growth on wood shingle roofs. It prevents moss and aids water repellency on bricks, concrete and masonry.

**APPLICATION:** For termite prevention, wood should be treated prior to construction.

The best method to apply No. 91 is by total immersion. The temperature of the preservative should be a minimum of 40°F. The wood to be coated must be clean and dry. A good rule of thumb is a 4-minute dip time for each inch of lumber thickness.

When dipping is not practical, apply 2 liberal coats by brush or flood spray. Be sure to thoroughly saturate the ends of the wood. Do not allow Behr Wood Preservative No. 91 to dry between coats.

Surround the entire structure with a treated trench. Remove soil from around the foundation leaving a trench 30 inches deep but not below the top of the footing if the top is shallower. Using an insecticide sprayer, apply 5 gallons per 10 linear foot of trench up to 15

inches deep and 10 gallons per 10 linear foot for deeper trenches. Grass, trees and shrubs within three feet of the trench should be removed or protected with tar paper.

To kill moss and prevent regrowth on wood roofs, apply one gallon per 400 square feet of roof. Take care that drip from roof line does not contact live plants; either remove them or cover with tar paper. After a one week period of drying time sweep off dead moss and dirt.

**CLEAN-UP:** Brushes, spray equipment and immersion tanks can be cleaned up with paint thinner or mineral spirits.

**COVERAGE:** Brush or spray applications gives 150 to 200 square feet per gallon. Dipping: 6 to 9 gallons per 1,000 board feet (varies according to immersion time, wood porosity, etc.).

**DRYING TIME:** Under normal conditions of temperature and humidity Behr Wood Preservative No. 91 will dry in 24-48 hours. However, before finishing over No. 91 be sure the treatment is dry and odor-free.

\*Paint or varnish may be used over dried No. 91. In order to stain over No. 91, allow it to weather at least three months for oil base stains. For latex and water base stains weathering time is six months.

**LIMITED WARRANTY:** DUE TO THE FACT BEHR PROCESS CORPORATION HAS NO CONTROL OVER PROPER SURFACE PREPARATION OR APPLICATION METHODS, NO GUARANTEE AS TO RESULTS IS OFFERED, EXPRESSED OR IMPLIED. BEHR GUARANTEES THE CONTENTS OF THE CAN ONLY. IF THIS PRODUCT IS DEFECTIVE, REPLACEMENT MATERIAL WILL BE FURNISHED FREE OF CHARGE OR A REFUND OF THE MATERIAL COST AT MANUFACTURER'S OPTION. LABOR COSTS ARE NOT COVERED BY THIS WARRANTY. RESPONSIBILITY FOR CLAIMS OF ANY KIND IS STRICTLY LIMITED TO THE PURCHASE PRICE OF THE MATERIAL.

**WARNING!****CONTAINS PETROLEUM DISTILLATE AND PENTACHLOROPHENOL**

Causes skin irritation. Do not get in eyes, on skin or clothing. Keep the product and treated articles away from food and plants. Harmful or fatal if swallowed or absorbed through skin. Do not breathe vapors or spray mist - **USE WITH ADEQUATE VENTILATION** - do not use or mix indoors or in other confined areas. Wear protective clothing and rubber gloves when handling the freshly treated lumber. This product is toxic to fish and wildlife. Keep out of lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product as specified on this label. **FIRST AID:** External; If on skin, wash with plenty of water. Remove and wash contaminated clothing before reuse. If in eyes, immediately flood with water for at least 15 minutes, call a physician. Internal; If swallowed, drink 1 or 2 glasses of water and induce vomiting by touching back of the throat with finger or blunt object. Do not induce vomiting or give anything by mouth to an unconscious person. **Get medical attention. COMBUSTIBLE.** Do not use, pour, spill or store near heat or open flame. Close container after each use. **DISPOSAL:** Do not reuse empty container. Wrap container and put in trash collection.

EPA Establishment No. 32273-CA-1

BEHR PROCESS CORP., SANTA ANA, CALIF. 92702