

APPLICATION

ALGAE-CONTROL PQ is used to control algae, bacteria, and fungi in recirculating commercial and industrial water cooling towers. Prior to its use, systems must be cleaned to remove algal growth, microbiological slime and other deposits. An initial slug addition of 1.90 to 4.75 fluid ounces of ALGAE-CONTROL PQ per 1000 gallons of water to provide a concentration of 16 to 40 parts per million of ALGAE-CONTROL PQ based on the total weight of water in the system is recommended. Repeat initial dosage until control is evident. Subsequent slug additions of 0.47 to 4.75 fluid ounces of ALGAE-CONTROL PQ per 1000 gallons of water (4 to 40 parts per million of ALGAE-CONTROL PQ) should be employed every 2 to 5 days or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the microbiological problem. Slug additions should be made in the sump of water cooling towers.

Yelland Chemicals

"Water Treatment"

MEHL LAKE

Phone 906 - 346-4871. GWINN, MICH. 49841

ALGAE-CONTROL PQ

(POLY-QUAT)

COMMERICAL--INDUSTRIAL PRODUCT-COOLING WATERS

CAUTION

Keep Out Of The Reach Of Children

COMPOSITION

	Percent by weight
Active ingredient	30.0 percent
Poly loxyethylene (dimethyliminio) ethylene (dimethyliminio)- ethylene dichloride	30.0 percent
Inert ingredient	70.0 percent
Weight per gallon	8.90 pounds
Weight of active ingredient per gallon	2.67 pound

NET CONTENTS

EPA REG. NO. 32700-3

CAUTION


Keep Out Of The Reach Of Children

Harmful if swallowed. Avoid contact with skin and eyes. In case of contact flush with plenty of water for at least 15 minutes. If eye irritation persists get medical attention. Avoid contamination of food.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public water. Do not contaminate water by cleaning of equipment or disposal of waste. Use only as directed on label. Do not reuse container. Destroy when empty.

Manufactured By

**Yelland Chemicals
Gwinn, Michigan 49841**

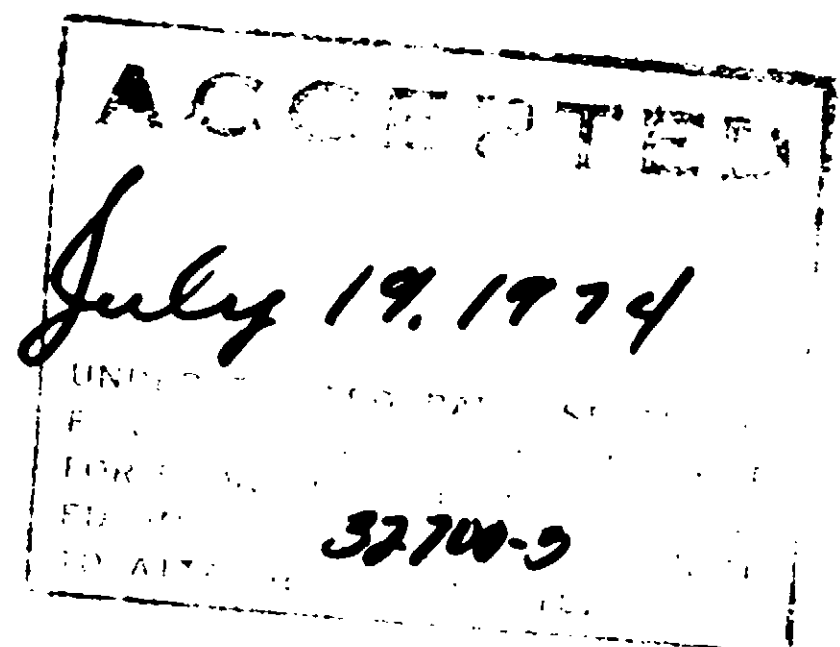

327003