


MICROBIOCIDE M-216

EPA Reg. No. 32965-2

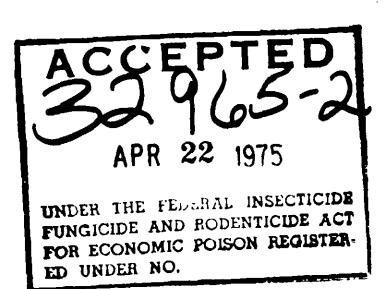

COMPOSI

Active ing

Poly oxy (dimethy

Inert ingre

Weight Weight

APPLICATION

Microbiocide M-216 is used to control algae, bacteria, and fungi in recirculating commercial and industrial water cooling towers. Prior to its use, systems must be cleaned to remove algal growth, microbiological slime and other deposits. An initial slug addition of 4.0 to 10.0 fluid ounces of Microbiocide M-216 per 1000 gallons of water to provide a concentration of 32 to 80 parts per million of Microbiocide M-216 based on the total weight of water in the system is recommended. Repeat initial dosage until control is evident. Subsequent slug additions of 1.0 to 10.0 fluid ounces of Microbiocide M-216 per 1000 gallons of water (8 to 80 parts per million of Microbiocide M-216) should be employed every 2 to 5 days or as needed. The frequency of addition depends upon the relative amount of bleed-off and the severity of the microbiological problem. Slug additions should be made in the sump of water cooling towers.

Harmful if swallowed. Do not get in eyes. Avoid contact with skin. In case of contact, flush with plenty of water for at least 15 minutes. If eye irritation persists, get medical attention. Avoid contamination of food.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public water. Do not contaminate water by cleaning of equipment or disposal of wastes. Use only as directed on label.

Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place.

P.O. BOX 228 • FAIRLAND, INDIANA 46176 • TELEPHONE: 317/835-2873

TION	Percent by weight
redient	15.0 percent
yethylene (dimethyliminio) ethylene	
yliminio) ethylenedichloride	15.0 percent
dient	85.0 percent
per gallon	8.58 pounds
of active ingredient per gallon	1.29 pounds

CAUTION **KEEP OUT OF THE REACH OF CHILDREN**