



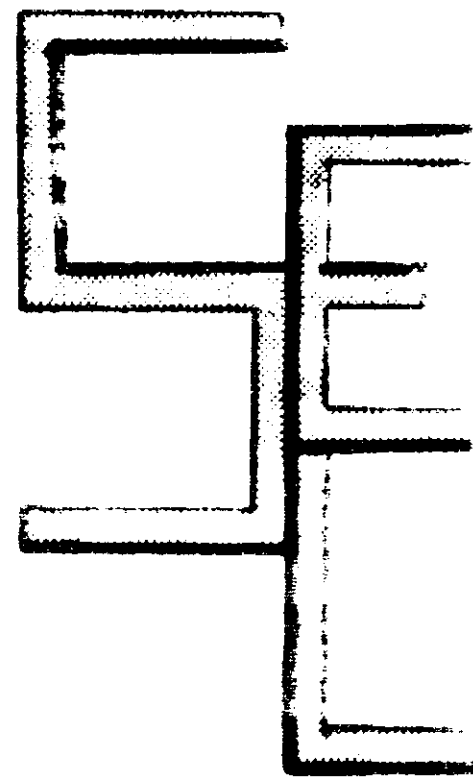

SOUTHEASTERN LABORATORIES, INC.

1000 N. W. 10th Ave.
P.O. Box 100
Miami, Florida 33132
TELEPHONE (919) 740-4112

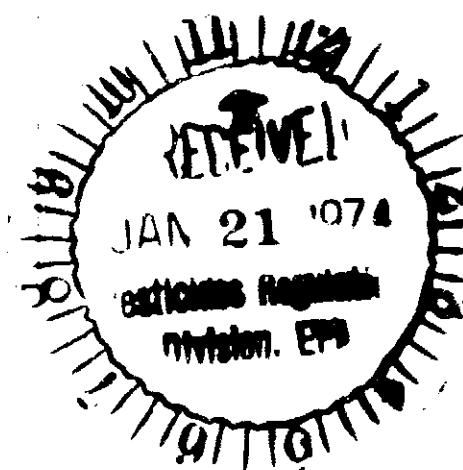

H-3 ALGAECID:

A concentrated algaecide for industrial recirculating water cooling towers. The water in the tower systems clear and free of visible algae slime and millions of algae bacteria.

ACTIVE INGREDIENTS:

1. Aqueous solution of 60% active ingredient
2. Aqueous solution of 40% active ingredient
3. Aqueous solution of 20% active ingredient
4. Aqueous solution of 10% active ingredient

USE INSTRUCTIONS:

CAUTION:

KEEP OUT OF REACH OF CHILDREN

Do not use on concrete, severe eye and skin irritant. Do not breathe vapors. Avoid contact with eyes and nose. Do not swallow. Avoid contamination.

ACCEPTED

Jan 31, 1974

FIRST AID:

If contacted with eyes, wash with contaminated clothing before use. If swallowed, do not induce vomiting.

If swallowed, do not induce vomiting. If inhaled, move to fresh air. If on skin, wash with soap and water. If on clothing, remove and wash separately.

NOTICE TO USER:

Probable mucous membrane irritation. Do not use on concrete.

Do not use on concrete. Do not use on painted surfaces. Do not use on galvanized steel. Do not use on aluminum.

DIRECTIONS FOR USE:

Clear recirculating water systems. Apply between 40°F and 80°F. Use 1/2 ounce per 100 gallons.

Before use, check water pH. If pH is below 7.0, add acid to lower pH. If pH is above 8.0, add alkali to raise pH. Use 1/2 ounce per 100 gallons.

INITIALS:

Use only on concrete. Do not use on painted surfaces.

Do not use on concrete. Do not use on painted surfaces. Do not use on galvanized steel.

CAUTION:

Do not use on concrete. Do not use on painted surfaces.

Do not use on concrete. Do not use on painted surfaces. Do not use on galvanized steel.

NOTE:

Do not use on concrete. Do not use on painted surfaces.

Do not use on concrete. Do not use on painted surfaces. Do not use on galvanized steel.