


SOUTHEASTERN LABORATORIES, INC.

2213 SOUTH BYPASS 117  
P. O. BOX 1138  
GOLDSBORO, NORTH CAROLINA 27530  
TELEPHONE (919) 735-9222

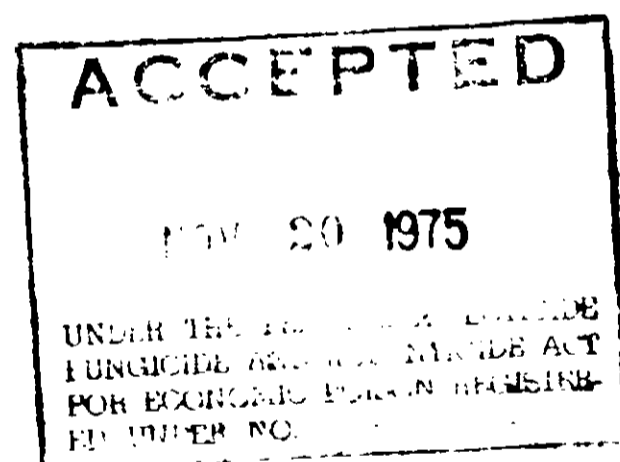

## H-4 ALGAECIDE

This treatment is used to inhibit the growth of algae, bacteria, and fungi in Commercial and/or Industrial Recirculating Water Cooling Systems.

### ACTIVE INGREDIENTS:

Disodium cyanodithioimidocarbonate	4.23%
Ethylenediamine	1.60%
Potassium N-methyldithiocarbamate	5.83%

### INERT INGREDIENTS:

88.34%  
100.00%

NET CONTENTS: 55 Gals.      EPA REG. No.: 37355-4

## **WARNING: KEEP OUT OF REACH OF CHILDREN**

Causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.

FIRST AID: In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes call a physician. Remove and wash contaminated clothing before reuse. If swallowed, give patient doses of powdered charcoal immediately or all he can swallow of raw egg whites, milk, gruel, or flour and water. Then induce vomiting with salt, soap, or mustard in warm water. **CALL A PHYSICIAN IMMEDIATELY.**

DIRECTIONS FOR USE: Before treatment with H-4 Algaecide, systems must be cleaned to remove algae growth, microbiological slime, and other deposits.

INITIAL DOSE: The systems should be treated with an initial slug addition of 5.1 to 10.2 fluid ounces of H-4 Algaecide per 1,000 gallons of water in the system. Repeat initial dosage until control is evident.

SUBSEQUENT DOSE: When control is evident, slug additions of 1.7 to 10.2 fluid ounces of H-4 Algaecide per 1,000 gallons of water should be made every 1 to 5 days or as needed. The required frequency of treatment depends on the relative amount of bleedoff and the severity of the microbiological problem. Slug additions of H-4 Algaecide should be made to the sump of water cooling towers.

NOTICE: This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, rivers, or other water. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply the product in accordance with the label. Do not reuse empty drum. Return it to the conditioner or destroy by perforating the drum.