



OLIN 3002

Algicide for use in industrial recirculating cooling water systems

EPA Est. No.
33576-CA-1
33576-KS-1
33576-NY-1

OLIN 3002 is recommended for use in industrial recirculating cooling water towers.

OLIN 3002 can be prescribed to meet virtually any cooling system problem that involves algae or odors. Each formulation of OLIN ALGICIDE contains different primary ingredients toxic to Algae growth. Thus two different formulations should be kept on hand to be alternated at regular intervals.

RECOMMENDATIONS FOR USE: For best results slug feed, beginning treatment before system has become fouled with algae, or after cleaning system whose efficiency has been reduced by such fouling. Badly fouled systems must be cleaned before treatment is begun.

INITIAL DOSAGE: 0.5 lb. OLIN 3002/1,000 gals. This is equivalent to 15ppm available chlorine. Repeat as necessary to get a reading of 1. ppm available chlorine in system for 4 hours, as determined by a suitable chlorine test kit.

MAINTENANCE DOSAGE: 0.25 to 0.5 lb. OLIN 3002/1,000 gals. as recommended. Frequency of dosage addition is determined by results obtained. Normally, once a week will suffice. At certain times of the year, two dosages a week or even several dosages a day may be required. Product may be introduced at tower basin or cold water sump.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public water. Do not contaminate water by cleaning of equipment or disposal of waste. Use only as directed on label.

Rinse empty container thoroughly with water and discard it.

ACTIVE INGREDIENTS: Sodium Dichloro-s-triazinetriene dihydrate 45%
(Available Chlorine 24.5%)

INERT INGREDIENTS 55%

WARNING

Keep Out of Reach of Children

Oxidizing Material

AVOID contact with eyes, skin or clothing

Harmful if swallowed. Harmful to skin and eyes.

AVOID breathing dust. AVOID contact with organic material.

FIRST AID: In case of contact, wash skin with plenty of water. Flush eyes for at least fifteen minutes and get medical attention. In case of swallowing, give a tablespoon of salt in glass of warm water. Repeat until vomit is clear. Call a physician.

EPA Registration No. 33576-23-AA-50607

176

FOR INDUSTRIAL USE ONLY


lb. Net Wt.

Olin WATER SERVICES

Olin Corporation

Kansas City, Kansas 66115

Stamford, Conn. 06904

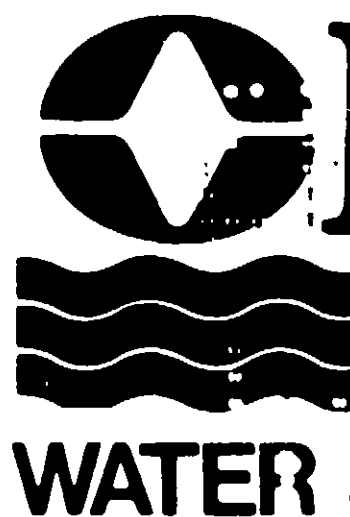

OLIN

Algicide for use in industrial re

OLIN 3002 is recommended for use in industrial recirculating cooling water towers.

OLIN 3002 can be prescribed to meet virtually any cooling system problem that involves algae or odors. Each formulation of OLIN ALGICIDE contains different primary ingredients toxic to Algae growth. Thus two different formulations should be kept on hand to be alternated at regular intervals.

RECOMMENDATIONS FOR USE: For best results slug feed, beginning treatment before system has become fouled with algae, or after cleaning system whose efficiency has been reduced by such fouling. Badly fouled systems must be cleaned before treatment is begun.

INITIAL DOSAGE: 0.5 lb. OLIN 3002/1,000 gals. This is equivalent to 15ppm available chlorine. Repeat as necessary to get a reading of 1. ppm available chlorine in system for 4 hours, as determined by a suitable chlorine test kit.

MAINTENANCE DOSAGE: 0.25 to 0.5 lb. OLIN 3002/1,000 gals as recommended. Frequency of dosage addition is determined by results obtained. Normally, once a week will suffice. At certain times of the year, two dosages a week or even several dosages a day may be required. Product may be introduced at tower basin or cold water sump.