

33677-7

12-4-2003

1/3

# TOLCIDE® PS75LT

## INDUSTRIAL ANTIMICROBIAL

**ACTIVE INGREDIENT:**

Tetrakis (hydroxymethyl) phosphonium sulfate..... 75%

**OTHER INGREDIENTS:**..... 25%

**TOTAL:** .....100%

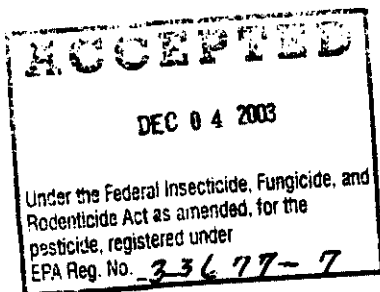
EPA Reg. No. 33677-7

EPA Est. 550-TX-2

**KEEP OUT OF REACH OF CHILDREN**
**DANGER**

FIRST AID	
<b>If in eyes:</b>	<ul style="list-style-type: none"> <li>• Hold eye open and rinse slowly and gently with water for 15-20 minutes.</li> <li>• Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.</li> <li>• Call a poison control center or doctor for treatment advice.</li> </ul>
<b>If swallowed:</b>	<ul style="list-style-type: none"> <li>• Call a poison control center or doctor immediately for treatment advice.</li> <li>• Have person sip a glass of water if able to swallow.</li> <li>• Do not induce vomiting unless told to do so by a poison control center or doctor.</li> <li>• Do not give anything by mouth to an unconscious person.</li> </ul>
<b>If on skin or clothing:</b>	<ul style="list-style-type: none"> <li>• Take off contaminated clothing.</li> <li>• Rinse skin immediately with plenty of water for 15-20 minutes.</li> <li>• Call a poison control center or doctor for treatment advice.</li> </ul>
Have the product container or label with you when calling a poison control center or doctor, or going for treatment.	
<b>Note to physician:</b> Probable mucosal damage may contraindicate the use of gastric lavage.	

In case of emergency, call CHEMTREC at 1-800-424-9300.

**Manufactured By:**

**RHODIA CONSUMER SPECIALTIES LIMITED**
**Trinity Street • Oldbury • West Midlands B69 4WD • United Kingdom**
**Product of the United Kingdom**

[Box and bullet format for FIRST AID section is optional.]

2/3

**PRECAUTIONARY STATEMENTS  
HAZARD TO HUMANS AND DOMESTIC ANIMALS**

**DANGER:** Corrosive. Causes eye damage and skin irritation. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. Prolonged or frequent skin contact may cause allergic reactions in some individuals. Harmful or fatal if swallowed. Avoid contamination of food. Remove contaminated clothing and wash before reuse.

**ENVIRONMENTAL HAZARDS**

This product is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

**STORAGE AND DISPOSAL**

Do not contaminate water, food or feed by storage or disposal.

**STORAGE:** Store this product in a cool, dry area away from direct sunlight and heat to avoid deterioration. In case of a spill, flood the area with large quantities of water.

**PESTICIDE DISPOSAL:** Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

**CONTAINER DISPOSAL:** Triple rinse (or equivalent) all containers and offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill or other procedures approved by state and local authorities.

**Note:** Seller makes no warranty, expressed or implied, concerning the use of this product in the manner indicated on the label. Buyer assumes all risk and/or handling of this material, when such use and/or handling is contrary to label directions.

**DIRECTIONS FOR USE**

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

**OIL FIELD OPERATIONS**

TOLCIDE® PS75LT is effective in controlling sulfate reducing bacteria, general aerobic bacteria, and microorganisms that contribute to biofilm formation in oil field recovery, processing and distribution applications and supporting systems; such as injection water, water holding tanks, disposal well water, recirculating water handling systems, and pipelines. TOLCIDE® PS75LT has been shown to dissolve iron sulfide and sequester iron when used under these conditions, leading to improved filter life and well injectivity, and reduction of hydrocarbon sheen. TOLCIDE® PS75LT is also effective for use in controlling microbial growth in fluids used for drilling and stimulation of oil wells.

**Water Floods**

TOLCIDE® PS75LT should be added to a water flood system at a point where uniform mixing will occur.

**Initial Treatment:** For a noticeably fouled system, add 93-350 ppm TOLCIDE® PS75LT. When added to a flowing system, slug dose for 2-6 hours based on flow rates. Repeat as necessary until control is achieved.

**Subsequent Treatment:** Once control has been achieved, add 14-98 ppm TOLCIDE® PS75LT weekly or as needed to maintain control. When added to a flowing system, slug dose for 2-6 hours based on flow rates.

**Continuous Treatment:** TOLCIDE® PS75LT can be dosed continuously at a level of 14-67 ppm.

**Oil and Gas Pipelines**

TOLCIDE® PS75LT should be added at a point in the pipeline where uniform mixing will occur.

**Slug Dosing:** Follow instructions for water flood treatment.

**Continuous Dosing:** TOLCIDE® PS75LT can be dosed continuously at a level of 14-100 ppm.

**Drilling Muds, Packer Fluids, Completion and Workover Fluids**

TOLCIDE® PS75LT should be added to these fluids at a point where uniform mixing will occur. Add 33-1400 ppm of TOLCIDE® PS75LT to a freshly prepared fluid depending on severity of contamination.

**ACCEPTED**  
DEC 04 2003  
Under the Federal Insecticide, Fungicide, and  
Rodenticide Act as amended, for the  
pesticide, registered under  
EPA Reg. No. 33677-7

**FIRE PROTECTION SYSTEMS**

TOLCIDE® PS75LT is effective at controlling microbial growth in waters and on pipe surfaces in fire protection systems. Such microbial growth when combined with other forms of corrosion can lead to accelerated corrosion rates and pitting corrosion, commonly referred to as microbiologically influenced corrosion. TOLCIDE® PS75LT also removes free oxygen from the water, thus eliminating an important nutrient for bacteria and an important reactant in many corrosion reactions.

TOLCIDE® PS75LT should be added to a fire protection system using a chemical metering pump capable of variable pump rates. The TOLCIDE® PS75LT should be injected at a point, such as a riser, manifold or makeup feed water line, where uniform mixing and distribution will occur. Add 100-400 ppm TOLCIDE® PS75LT, depending on severity of microbial contamination in the system. Repeat as needed.

**SOLUTIONS / EMULSIONS**

Not for use in manufacture of paper and paperboard products and adhesives that may come in contact with food. For the preservation of solutions, emulsions, adhesives and other aqueous liquid products, the addition of 0.0233% to 0.233% of TOLCIDE® PS75LT is effective. Add at a point in the processing system where there will be sufficient time and agitation for good mixing and dispersion. The exact amount of TOLCIDE® PS75LT to be added for the preservation of given formulations will depend on the components as well as local storage time and requirements.

TOLCIDE® is a registered trademark of Rhodia Consumer Specialties Limited.

30E-0503

**NET CONTENTS: As Marked on Container**

