


ACCEPTED

JUL 1 1975


UNDER THE FEDERAL INSECTICIDE
FUNGICIDE AND RODENTICIDE ACT
FOR THE YEAR 1974
EPA REG. NO. 33834-1

ACTION

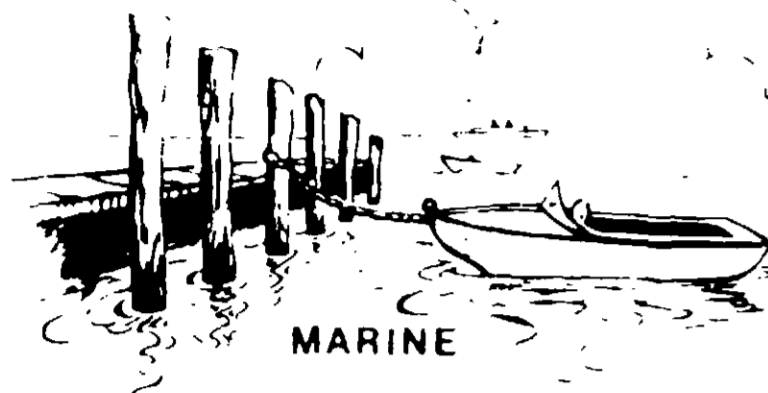

MARINE

Premium Quality Creosote WOOD PRESERVATIVE

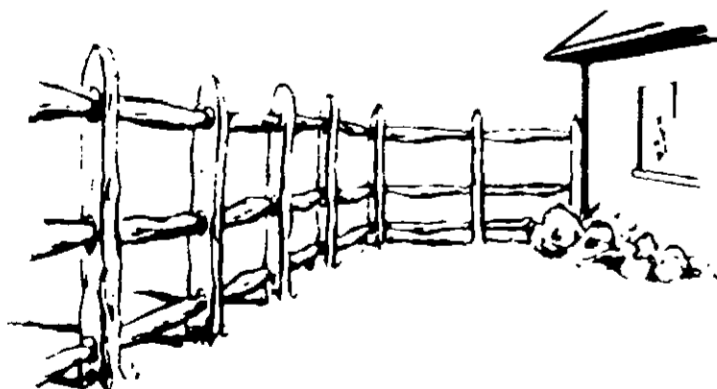

HOME

ACTIVE INGREDIENTS:
COAL TAR DISTILLATE . . . 94%
COAL TAR ACIDS . . . 4%
INERT INGREDIENTS: . . . 2%

INDUSTRIAL

EPA REG. No. 33834-1
EPA EST. 34467 NJ01

WARNING: KEEP OUT OF REACH OF CHILDREN

COMBUSTIBLE MIXTURE - KEEP AWAY FROM FIRE AND OPEN FLAME

READ SIDE PANEL FOR ADDITIONAL PRECAUTIONS

NET 5 U.S. GALLONS

DESCRIPTION

Action Creosote Oil Compound is recommended for the preservation of all types of exposed unpainted lumber such as fence posts, shingles, underground sills, sub frames, piers, bridges, boardwalks, pilings, stringers, barns, etc. It protects against decay, rot and wood borers. For protection against termites, wood should be treated prior to use in construction. It will not harden or crystallize in the can - flows and brushes out smoothly - sprays easily. Insoluble in water, it does not wash out.

DIRECTIONS

All wood to be treated should be clean and dry. Fence posts, poles, foundation timbers and heavy wooden members should be free of bark, dry, well seasoned, and immersed in the product for a period of 12 to 48 hours. Best results are obtained when atmospheric temperatures are 60° F. or above.

BRUSHING:

For best results apply two (2) coats with a stiff brush. Coat generously around ends, knots, and checked places. Covers approximately 100 square feet per gallon.

SPRAYING:

Apply two (2) coats using mechanical or hand pump. Covers approximately 150 square feet on first coat; up to 225 square feet on second coat.

DIPPING

Completely immerse timber. For best results, heat while timber is soaking removing source of heat one half hour before taking wood out of the bath. Timber should be immersed at least one half hour. Whenever possible, treated wood should be inspected frequently. It may be necessary to retreat to maintain control of rot and decay fungi.

ACTION

Creosote
WOOD
PRESERVATIVE

NOTICE


This product is offered in good faith, however, the seller is not responsible for damages of any kind caused by careless or improper handling or use.

USE
ACTION

Creosote


WOOD PRESERVATIVE

ACTION

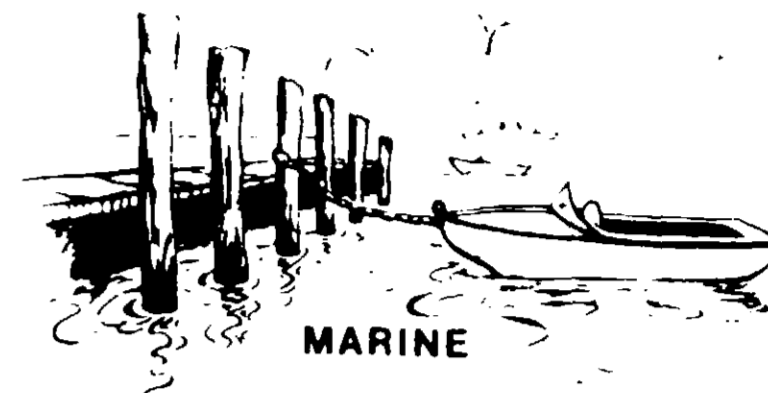

MARINE

Premium Quality Creosote WOOD PRESERVATIVE

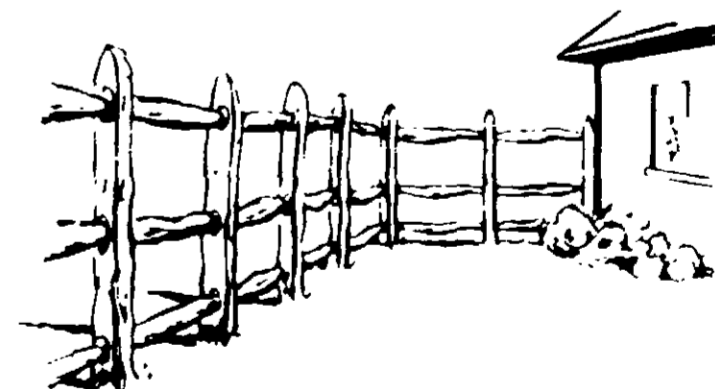

HOME

ACTIVE INGREDIENTS:
COAL TAR DISTILLATE . . . 94%
COAL TAR ACIDS . . . 4%
INERT INGREDIENTS: . . . 2%

EPA REG. No. 33834-1
EPA EST. 34467 NJ01

WARNING: KEEP OUT OF REACH OF CHILDREN

COMBUSTIBLE MIXTURE - KEEP AWAY FROM FIRE AND OPEN FLAME

READ SIDE PANEL FOR ADDITIONAL PRECAUTIONS

NET 5 U.S. GALLONS

ACCEPTED


JUL 1 1975

ACTION



MARINE

Premium Quality
Creosote
WOOD PRESERVATIVE

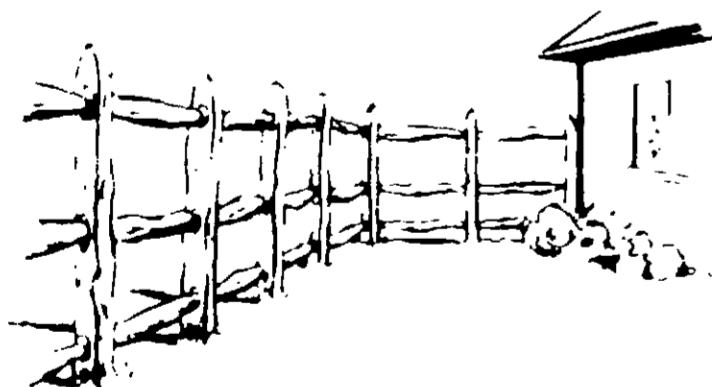

ACTIVE INGREDIENTS
COAL TAR DISTILLATE 94%
COAL TAR ACIDS 4%
INERT INGREDIENTS 2%

EPA REG. No. 33834-1
EPA EST. 34467 NJ01

MADE IN THE U.S.A.

NET 5 U.S. GALLONS

DESCRIPTION

Action Creosote Oil Compound is recommended for the preservation of all types of exposed unpainted lumber such as fence posts, shingles, underground sills, sub frames, piers, bridges, boardwalks, pilings, stringers, barns, etc. It protects against decay, rot and wood borers. For protection against termites, wood should be treated prior to use in construction. It will not harden or crystallize in the can—flows and brushes out smoothly—sprays easily. Insoluble in water, it does not wash out.

DIRECTIONS

All wood to be treated should be clean and dry. Fence posts, poles, foundation timbers and heavy wooden members should be free of bark, dry, well seasoned, and immersed in the product for a period of 12 to 48 hours. Best results are obtained when atmospheric temperatures are 60° F. or above.

BRUSHING

For best results apply two (2) coats with a stiff brush. Coat generously around ends, knots, and checked places. Covers approximately 100 square feet per gallon.

IMMERSION

Apply two (2) coats using mechanical or hand pump. Covers approximately 150 square feet on first coat; up to 225 square feet on second coat.

Completely immerse timber. For best results, heat while timber is soaking removing source of heat one half hour before taking wood out of the bath. Timber should be immersed at least one half hour. Whenever possible, treated wood should be inspected frequently. It may be necessary to retreat to maintain control of rot and decay fungi.

ACTION

Creosote
WOOD PRESERVATIVE

This product is offered in good faith, however, the seller is not responsible for damages of any kind caused by careless or improper handling or use

USE
ACTION


Creosote
WOOD PRESERVATIVE

ACTION



MARINE

Premium Quality
Creosote
WOOD PRESERVATIVE

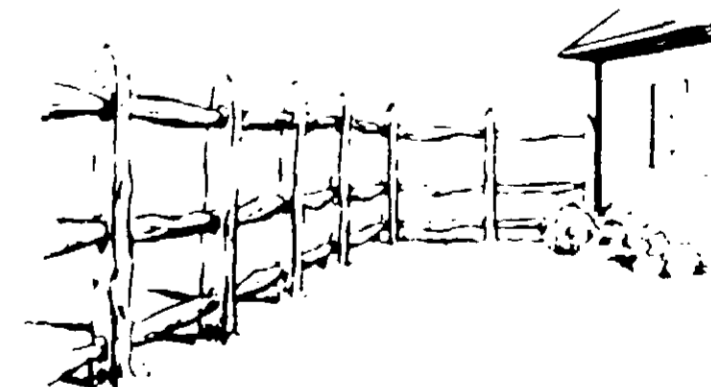

ACTIVE INGREDIENTS
COAL TAR DISTILLATE 94%
COAL TAR ACIDS 4%
INERT INGREDIENTS 2%

EPA REG. No. 33834-1
EPA EST. 34467 NJ01

WARNING: KEEP OUT OF REACH OF CHILDREN

NET 5 U.S. GALLONS

DESCRIPTION

Action Creosote Oil Compound is recommended for the preservation of all types of exposed unpainted lumber such as fence posts, shingles, underground sills, sub frames, piers, bridges, boardwalks, pilings, stringers, barns, etc. It protects against decay, rot and wood borers. For protection against termites, wood should be treated prior to use in construction. It will not harden or crystallize in the can—flows and brushes out smoothly—sprays easily. Insoluble in water, it does not wash out.

DIRECTIONS

All wood to be treated should be clean and dry. Fence posts, poles, foundation timbers and heavy wooden members should be free of bark, dry, well seasoned, and immersed in the product for a period of 12 to 48 hours. Best results are obtained when atmospheric temperatures are 60° F. or above.

BRUSHING:

For best results apply two (2) coats with a stiff brush. Coat generously around ends, knots, and checked places. Covers approximately 100 square feet per gallon.

SPRAYING:

Apply two (2) coats using mechanical or hand pump. Covers approximately 150 square feet on first coat; up to 225 square feet on second coat.

DIPPING:

Completely immerse timber. For best results, heat while timber is soaking removing source of heat one half hour before taking wood out of the bath. Timber should be immersed at least one half hour. Whenever possible, treated wood should be inspected frequently. It may be necessary to retreat to maintain control of rot and decay fungi.

NOTICE

This product is offered in good faith, however, the seller is not responsible for damages of any kind caused by careless or improper handling or use.


ACTION

Creosote
WOOD
PRESERVATIVE

USE
ACTION


Creosote
WOOD PRESERVATIVE

ACTION

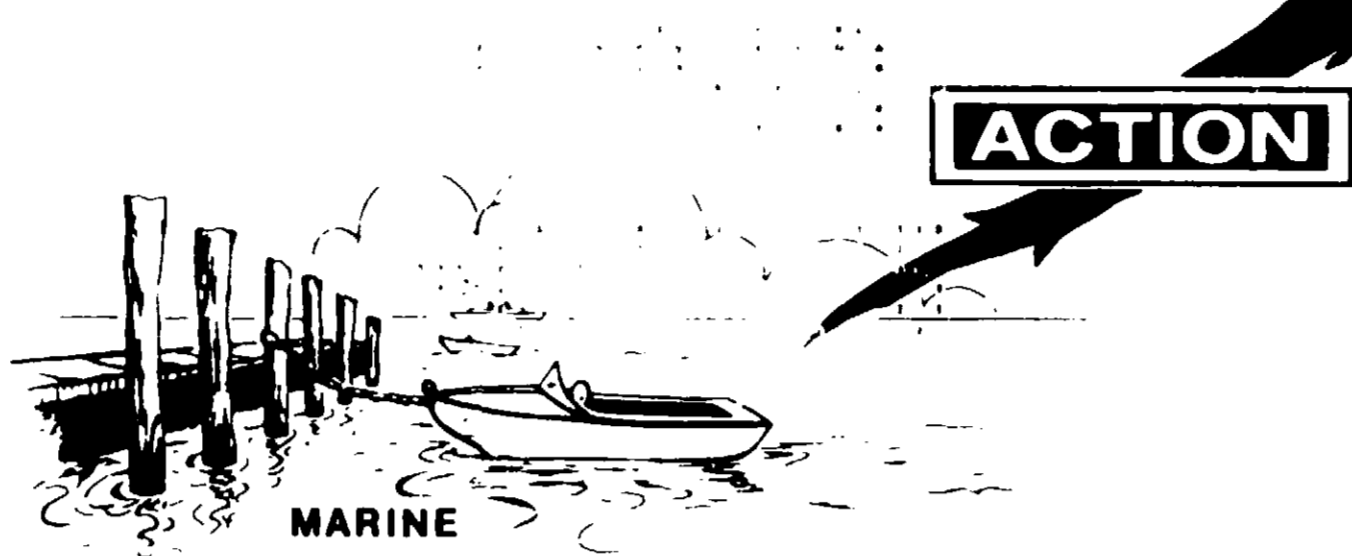

MARINE

Premium
Quality
Creosote
WOOD
PRESERVATIVE

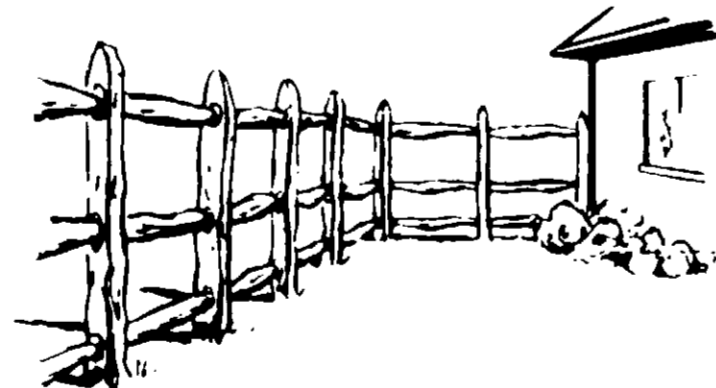

HOME

ACTIVE INGREDIENTS:
COAL TAR DISTILLATE 94%
COAL TAR ACIDS 4%
INERT INGREDIENTS: 2%

EPA REG. No. 33834-1
EPA EST. 34467 NJ01

WARNING: KEEP OUT OF REACH OF CHILDREN

COMBUSTIBLE MIXTURE - KEEP AWAY FROM FIRE AND OPEN FLAME.

READ SIDE PANEL FOR ADDITIONAL PRECAUTIONS.

NET 5 U.S. GALLONS

IMPORTANT

Keep from freezing while in storage, otherwise settling occurs. If exposed to temperatures below 40° F., place in a warm area for 24 hours or more and shake well before using. Do not use on wood which is to be painted afterwards as Creosote bleeds through most paints. When treating wood shingles, do not apply excess surface film as it may be washed off by sudden rain thereby marking sidewalls.

WARNINGS

Use only with adequate ventilation. Avoid breathing spray mist and direct contact with the skin. It may produce severe burns and may be fatal if swallowed. Do not get into the eyes. Wear goggles when spraying; use gloves when brushing or spraying. **COMBUSTIBLE MIXTURE** — Keep away from fire or open flame.

ANTIDOTE

If swallowed, do not induce vomiting, but call a physician at once. If the product gets into the eyes, flush with plenty of cold water. In case of skin contact, wash with soap and water after use.

Do not re-use empty container. Destroy it by perforating or crushing. Bury or discard it in a safe place away from water supplies.

This product is toxic to fish and wildlife. Do not empty or pour out any part of container into any body of water. Do not contaminate water by cleaning of equipment, or disposal of wastes. Apply this product only as specified on this label.

KEEP OUT OF REACH OF CHILDREN

ECOLOGICAL AND SPECIALTY PRODUCTS, INC
111 FIFTH AVE.,
PATERSON, N.J. 07524