

INTERCIDE LP-100

EPA REG. No. 34688-10

FUNGISTAT & BACTERIOSTAT FOR MANUFACTURE OF
TILE GROUT & TAPE JOINT COMPOUND

(For further information, see product technical bulletin)

ACTIVE INGREDIENT:

Bis (Tri-n-butyltin) Oxide 10%

INERT INGREDIENT:

Calcium Carbonate 90%

TOTAL 100%

DANGER

KEEP OUT OF REACH OF CHILDREN


Do not get in eyes, on skin or on clothing. Do not breathe dust. May be fatal if swallowed. Causes severe eye damage. Wear goggles or face shield when handling. Causes skin irritation. In case of skin contact, remove contaminated clothing and immediately wash skin with soap and water. For eyes, immediately flush with plenty of water. If irritation persists, get medical attention. Wash contaminated clothing before reuse. Avoid storage near food and feed products.

This product is toxic to fish and wildlife. Do not contaminate water by cleaning of equipment or disposal of wastes.

Do not reuse empty drum. Send to drum reconditioner or destroy by perforating or crushing and then bury in a safe place.

INTERSTAB

INTERSTAB CHEMICALS INC.
500 Jersey Avenue
New Brunswick N.J. 08903

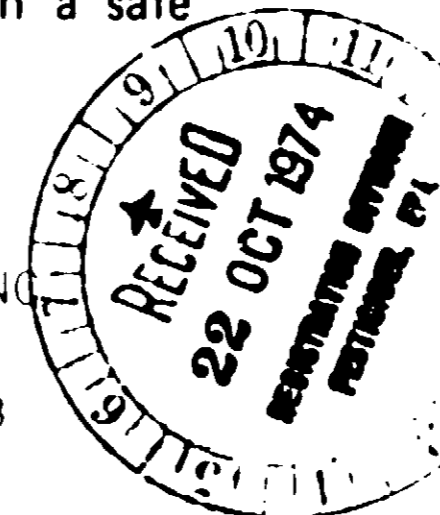

INTERCIDE LP-100

EPA. Reg. No. 34688-10

Intercide LP-100 is a specially prepared organotin compound for controlling gram-positive bacteria and fungi in tile grouts and wet mixed tape joint compounds.

Typical Physical Properties

Form	Fine Powder
Color	White
Particle Size	100% through a 200 mesh screen
Specific Gravity	2.50
Weight Per Solid Gallon	20.8 Pounds

Application Information

- 1) Will not cause sulfide staining over nail heads.
- 2) Non-deliquescent (up to 90% relative humidity).
- 3) Will not adversely affect other properties of dry powdered compound in the dry mix or wet state.

Tile Grouts

To control fungal and gram-positive bacteria in polyvinyl acetate tile grout, Intercide LP-100 is suggested in the range of 0.25 - 1.0 percent by weight.

Tape Joint Cements

To control gram-positive bacteria, Intercide LP-100 is suggested in the range of 0.25 - 1.0 percent by weight and to control bacterial growth, Intercide LP-100 is suggested in the range of 2.0 - 3.0 percent by weight for polyvinyl acetate tape joint cements.

Handling Precautions

Do not ingest. Do not get in eyes, on skin or on clothing. Do not breathe dust.

Causes severe eye damage. Wear goggles or face shield when handling. Causes skin irritation. In case of skin contact, remove contaminated clothing and immediately wash skin with soap and water. For eyes, immediately flush with plenty of water. If irritation persists, get medical attention. Wash contaminated clothing before reuse. Avoid

12-1474 over -

34688-10

INTERSTAB CHEMICALS, INC., 1000 W. 10TH AVENUE, DENVER, CO. 80202



grout, Intercide LP-100 is suggested in the range of 0.25 - 1.0 percent by weight.

Tape Joint Cements

To control gram-positive bacteria, Intercide LP-100 is suggested in the range of 0.25 - 1.0 percent by weight and to control bacterial growth, Intercide LP-100 is suggested in the range of 2.0 - 3.0 percent by weight for polyvinyl acetate tape joint cements.

Handling Precautions

Do not ingest. Do not get in eyes, on skin or on clothing. Do not breathe dust.

Causes severe eye damage. Wear goggles or face shield when handling. Causes skin irritation. In case of skin contact, remove contaminated clothing and immediately wash skin with soap and water. For eyes, immediately flush with plenty of water. If irritation persists, get medical attention. Wash contaminated clothing before reuse. Avoid

*Nov 12-1974
over -*

34688-10

INTERSTAB CHEMICALS INC. a part of Akzo 500 Jersey Avenue New Brunswick, N.J. 08903 Tel. (201) 247-2202 / (212) 285-9660

The information in this bulletin is, to our best knowledge, true and accurate, but all recommendations or suggestions are made without guarantee, since the conditions of use are beyond our control.



TTI

Handling Precautions (Cont.)

storage near food or feed products.

Fish Caution

This product is toxic to fish. Do not contaminate water by cleaning of equipment or disposal of wastes.

Standard Containers

Intercide LP-100 is available in fiber drums of 250 pounds net and 125 pounds net.

Do not reuse drums. Destroy by perforating or crushing and then bury in a safe place.

6/19/74