

# INTERCIDE COPPER OCTOATE 2% WOOD PRESERVATIVE-WATER REPELLENT

1071  
Pmsj  
34688-26

EPA REG. No. 34688-26 EPA EST. No. 34688-NJ-1

A READY-TO-USE FUNGICIDE FOR THE CONTROL OF MILDEW AND FUNGAL ROT ON WOOD

## DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

## PRECAUTIONARY STATEMENTS

Hazards to Humans and Domestic Animals

## CAUTION

Contains Petroleum Distillate

Harmful if swallowed, inhaled or absorbed through the skin. Do not get in eyes, on skin or on clothing. Wash thoroughly with soap and water after handling.

## STATEMENT OF PRACTICAL TREATMENT

IF IN EYES: Flush with plenty of water and get medical attention.

IF SWALLOWED: Do not induce vomiting. Call a physician immediately.

IF ON SKIN: Wash with plenty of soap and water.

## ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes.

## PHYSICAL OR CHEMICAL HAZARDS

Combustible. Keep away from heat, sparks or open flame. Use with adequate ventilation.

## ACTIVE INGREDIENT:

Copper 2-ethylhexanoate ..... 11.02%  
(Copper as metal...2%)

INERT INGREDIENTS: ..... 88.98%

TOTAL ..... 100.00%

KEEP OUT OF REACH  
OF CHILDREN

## CAUTION

SEE SIDE PANEL FOR  
ADDITIONAL PRECAUTIONARY STATEMENTS

Net Contents: 55 Gals.

This information is furnished without warranty, representation, inducement of any kind, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose except that it is accurate to the best of Interstab Chemical's knowledge or obtained from sources believed by Interstab Chemicals to be accurate, and Interstab Chemicals does not assume any legal responsibility for use or reliance upon same. Customers are encouraged to conduct their own tests. Before using any product read its label.

## Interstab Chemicals

500 JERSEY AVENUE, P.O. BOX 638  
NEW BRUNSWICK, NJ 08903 (201) 247-2209

## STORAGE AND DISPOSAL

Store away from heat or open flame in a cool dry location. Keep container tightly closed when not in use. Clean up spills immediately with diatomaceous earth or similar substance.

Do not contaminate water, food or feed by storage or disposal. Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility.

CONTAINER DISPOSAL: Triple rinse or equivalent. Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

## INSTRUCTIONS FOR TREATING WOOD


Intercide Copper Octoate 2% is a ready-to-use product containing Copper 2-ethylhexanoate. It contains a petroleum solvent and can be used for treating lumber and heavy timbers. Treatment of wood includes the following representative wooden items: wooden flooring for decks and patios, ladders, door and window frames and sashes, fence posts, stakes and small dimensional lumber, wooden siding and shingles, etc. It should be used on heavy structural timbers for above ground use only. Intericide Copper Octoate 2% can be tinted to a stain like color with common universal paint colorants.

DIP TREATMENT: Lumber and small wooden structures should be totally immersed in Intericide Copper Octoate 2% treating solution for a period of from 30 seconds to 3 minutes depending on the thickness of the wood and the absorption required. Heavy lumber items should be dipped for 3 minutes, whereas light and absorptive stakes, window frames, etc. may be sufficiently treated in less time. The treated wood should be drained of excess solution and allowed to air dry until all solvent is gone and the wood is free from solvent odor. This usually takes 24 hours.

BRUSH COATING AND SPRAYING: Intericide Copper Octoate 2% is ideal for brushing or spraying all types of wood items as illustrated above. When using a brush or spraying, coverage should be complete or until runoff starts to occur. After permitting to dry for 24 hours, a second coat may be applied. Treated dried wood may be painted over if desirable.

This product contains a water repellent and may be used on any lumber where water repellency is desirable. Care should be taken in areas that are to be painted to insure that the dried surface can be properly painted. It is suggested that a trial be made on a small area before the product is used generally.

CLEANING OF BRUSHES OR SPRAYING EQUIPMENT: Equipment and/or brushes may be cleaned with mineral spirits or a suitable paint thinner.

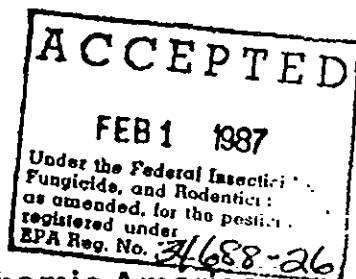

Akzo Chemie America