

# BALCOM



## LV 4 Ester Weed Killer

ACCEPTED  
SEP 3 1969  
UNDER FEDERAL INSECTICIDE  
FUNGICIDE AND FUNGICIDE ACT  
FOR ECONOMIC POISON REGISTERED  
UNDER NO. 960-162

34704-C

Low Volatile Emulsifiable concentrate for controlling certain weeds in corn,  
small grains, pastures, and other non-crop areas.

**CAUTION: Keep Out Of Reach Of Children.**

CAUTION: MAY CAUSE SKIN IRRITATION.

HARMFUL IF SWALLOWED.

Avoid contact with eyes, skin or clothing.

Do not store near food, fertilizer, seeds, insecticides, or fungicides.

Do not contaminate water used for irrigation, domestic or spray purposes.

In case of fire, use water spray, foam, dry chemical or CO<sup>2</sup>.

### ACTIVE INGREDIENTS:

*Isooctyl ester of	
2,4-Dichlorophenoxyacetic acid	69.7%
INERT INGREDIENTS	30.3%
	<hr/>
	100.0%

\*Equivalent to 46.2% 2,4-D acid or 4.0 pounds per gallon.

USDA, REG. NO. 960-162

Net Contents ..... U.S. Gallon(s)

### DIRECTIONS FOR USE

#### SMALL GRAINS, PASTURES, AND NON-CROP AREAS

**SMALL GRAINS (Wheat, Barley, Rye)**—Use ½ pint per acre for controlling annual and biennial weeds such as Ragweed, Mustard, Lambsquarter, Pigweed, and Wild Radish. Treat after the crop is well tillered and before the boot stage; or after the milk stage. For perennial weeds such as Bindweed, Knotweed, Canada Thistle, and Wild Morning Glory use ¾ pint per acre when weeds are in the pre-bloom stage, but avoid application when crop is in the boot to dough stage. Fall planted grains should not be treated until the following spring when crop is fully tillered and before the boot stage. Grain underseeded with legumes should not be sprayed unless injury to the legumes can be tolerated. Do not forage or graze treated grain fields within 2 weeks after treatment with 2,4-D. Do not feed treated straw to livestock.

**CORN**—For controlling susceptible annual or perennial weeds, apply not more than ½ pint per acre. If crop is 8 inches or taller, avoid application of 2,4-D to the growing point. Use drop nozzles and direct spray near base of the crop. Do not use after tassels appear. Different varieties may vary in susceptibility to 2,4-D. Do not use 2,4-D in corn grown for the production of hybrid seed. Consult your state agricultural experiment station or extension service weed specialist for specific recommendations. Avoid cultivating soon after treatment, when corn may be brittle.

For pre-emergence treatment of weeds in corn, use 1½ to 3 pints per acre, applied as a broadcast spray 1 to 3 days before crop emergence. Do not use pre-emergence sprays on light, sandy soils.

**SORGHUM**—Apply ½ pint per acre. Crop is most tolerant to 2,4-D when 4 to 12 inches tall. Use drop nozzles when crop is over 10 inches high. Do not use when plants are less than 3 inches tall, or after 12 inches tall. Do not apply during flowering or early dough stage. Consult your state agricultural experiment station or extension service weed specialist for specific recommendations.

**PASTURES, LAWNS, GOLF COURSES AND SIMILAR TURF**—Apply 2 pints Balcom LV 4 Ester Weed Killer per acre in sufficient water to provide good coverage. For small areas, use 1 tablespoonful per gallon of water. Do not apply to newly seeded areas until grass has become well established. Do not use on bent or other creeping grasses. Clover or other legumes may be injured by 2,4-D, especially during hot summer weather. Avoid spraying grains or seed grasses when in the blossoming or pollinating stage. Spray or vapors from this product may injure Dichondra. Do not graze treated areas by dairy animals within 7 days after treatment.

**NON-CROP AREAS**—For controlling annual and perennial weeds in fence rows, drainage ditchbanks, roadsides, and similar areas, use 2 to 3 pints in 100 gallons of water and wet foliage thoroughly. Repeat applications may be necessary on certain difficult-to-kill perennials, such as Canada Thistle, Bindweed, Wild Morning Glory, and White Top. Repeat when regrowth is visible. Use only where drift will not injure susceptible vegetation.

NOTE: For spot treatment of weeds in crops listed above, use 1½ tablespoonfuls per gallon of water.

### WARNING NOTICE

Balcom Chemicals, Inc. warrants that this material conforms to the chemical description on the label and is reasonably fit for the purposes referred to in the directions for use. This product is sold subject to the understanding that the buyer assumes all risks of use or handling which may result in loss or damage which are beyond the control of the seller, such as for example incompatibility with other products, the manner of its use or application, or the presence of other products or materials in or on the soil or crop. Balcom Chemicals, Inc. makes no other express or implied warranty of fitness or merchantability. The exclusive remedy of the user or buyer, and the limit of the liability of Balcom Chemicals, Inc. or any other seller, for any and all losses, injuries or damages resulting from the use or handling of this product shall be the purchase price paid by the user or buyer of the quantity of this product involved. The buyer and all users are deemed to have accepted the terms of this notice, which may not be varied by any verbal or written agreement.

# BALCOM CHEMICALS, INC.




1410 22ND STREET, CO. B. 662, GREELEY, COLORADO 80639, PHONE 353-4750

**ACCEPTED**  
 NO. 2-1975  
 Under the Federal Insecticide, Fungicide, and Rodenticide Act.  
 Registered with the EPA

**Z-SPAR**

*instruments*

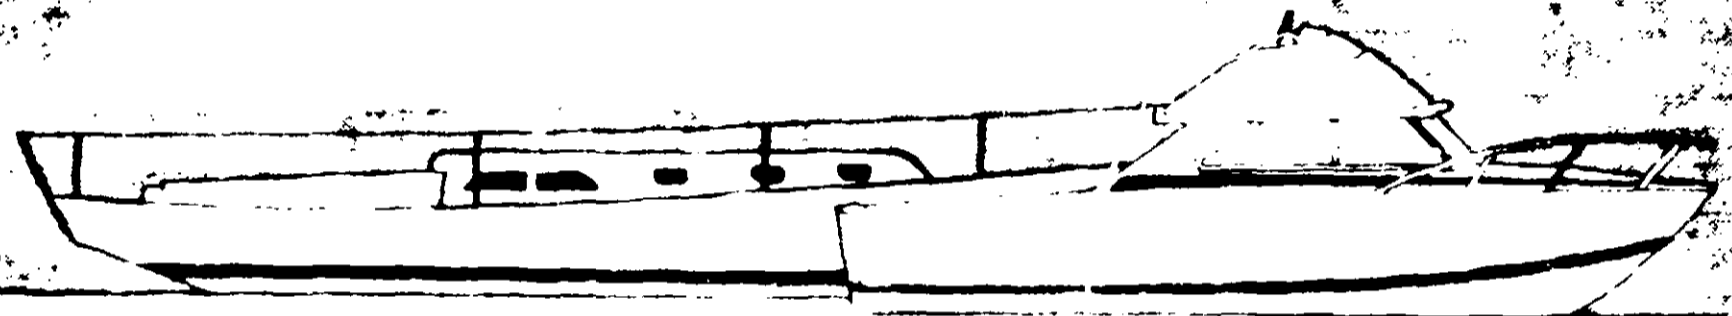

**3010-Coppertox Red Antifouling Paint**

**3010 COPPERTOX RED ANTIFOULING PAINT.**  
 A semi-soluble antifouling paint for use on the hulls of motor yachts, power boats, and other pleasure craft. Recommended For Use on: Motor Yachts, Power Boats, and other pleasure craft.

**DIRECTIONS FOR USE.**

**GENERAL:** Be sure surface is clean and dry before painting. When sanding or abrading surfaces, remove sanding dust with a soft brush, or wipe with a tack-rag, then follow by tack-rag with solvent to remove all sanding dust.

Stir paint well before use. Apply generally with brush or roller. Apply consistently at the rate of 1/2 to 1/4 gallon per 100 sq. ft. of surface. Z-Spar T-10 Primer Bottom Coat is required on any surface to be painted. Allow at least 24 hours between coats and 6 hours minimum and 7 days maximum before launching. Do not apply to any surface other than Boat Hulls. Clean equipment with Z-Spar Thinner. Cover all exposed surfaces with a tarp.

**OLD BOTTOM PAINTS**

When painting over old bottom paint, it must be removed to a depth of 1/4 inch.

results a  
any poss  
deterior  
cuts  
visible

**WOOD**

80-100  
coats of  
at 10  
grader p  
be appli  
parts m  
the bot

**FIBER**

may be  
used on  
fiberglass  
hulls  
hulls w  
eight ho  
100% c  
concrete

**STEEL**

surface  
hulls  
hulls

**WARNING!** KEEP OUT OF REACH OF CHILDREN. FLAMMABLE. HARMFUL IF SWALLOWED.

**NET 1 QUART**

**.95 Liters**

ACTIVE INGREDIENT  
Cuprous Oxide  
INERT INGREDIENTS  
EPA REG. NO. 61111-00

Andrew Brown, Division of Koppers Company

GM-100