


WC-4200 ALGAECIDE

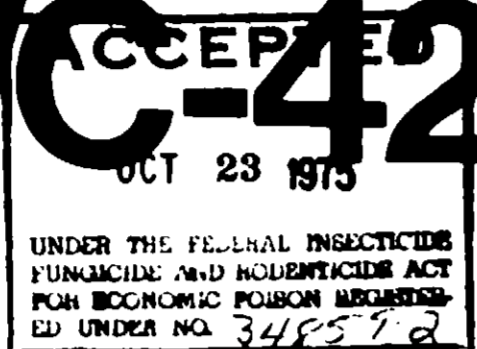

COMPOSITION

	Percent by weight
Active ingredients	8.75 percent
Disodium cyanodithioimidocarbonate	3.68 percent
Potassium N-methyldithiocarbamate	5.07 percent
Inert ingredients	91.25 percent
Weight per gallon	8.81 lb.
Weight of active ingredients per gallon	0.77 lb.

APPLICATIONS

WC-4200 ALGAECIDE is used to inhibit the growth of algae, bacteria, and fungi in recirculating commercial and industrial cooling water systems. Before treatment with WC-4200 ALGAECIDE systems must be cleaned to remove algal growth, microbiological slime, and other deposits. Then the system should be treated with an initial slug addition of 6.9 to 13.9 fluid ounces of WC-4200 ALGAECIDE per 1,000 gallons of water in the system. Repeat the initial dosage until control is evident. Subsequent slug additions of 2.3 to 13.9 fluid ounces of WC-4200 ALGAECIDE per 1,000 gallons of water should be made every 1 to 5 days or as needed. The required frequency of treatment depends on the relative amount of bleedoff and the severity of the microbiological problem. Slug additions of WC-4200 ALGAECIDE should be made to the sump of water cooling towers.

WARNING

KEEP OUT OF REACH OF CHILDREN

Causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.

FIRST AID. In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse.

If swallowed, give patient doses of powdered charcoal immediately or all he can swallow of raw egg white, milk, gruel, or flour and water. Then induce vomiting with salt, soap, or mustard in warm water. Call a physician immediately.

Do not reuse empty drum. Return to drum conditioner or destroy by perforating or crushing and burying in a safe place.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public water. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label.

MANUFACTURED BY
WAYNE CHEMICAL, INC.

Fort Wayne, Indiana 46807

EPA Reg. No. 34859-2