

DIESEL

STA-BIL®

FUEL STABILIZER
WITH BIOBOR® JF MICROBICIDE

TREATMENT OF BULK DIESEL FUEL STORAGE TANKS AND
DIESEL EQUIPMENT FUEL TANKS FOR COMMERCIAL TRUCKS, BOATS, SHIPS,
GENERATORS AND LOCOMOTIVES

ACTIVE INGREDIENTS

2,2'-(1-methyltrimethylenedioxy)bis-(4-methyl-1,3,2-dioxaborinane)	54.08%
2,2'-oxybis(4,4,6-trimethyl-1,3,2-dioxaborinane)	21.92%

INERT INGREDIENTS	24.00%
------------------------------------	--------

TOTAL	100.00%
------------------------	---------

Trademark of Hammonds Fuel Additives, Inc.

KEEP OUT OF REACH OF CHILDREN

DANGER

STATEMENT OF PRACTICAL TREATMENT

If in Eyes: Flush with plenty of water. Call a physician immediately.

If on Skin: Wash with plenty of soap and water. Get medical attention if irritation persists.

If Swallowed: Promptly drink large quantities of water. Avoid alcohol.

Do not induce vomiting. Do not give anything by mouth to an unconscious person. Call a physician immediately.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage.

See Back Panel for Additional Precautionary Statements.


NET CONTENTS:

EPA Reg. No. 35559-2

EPA Est. No.

35559-IL-002

Manufactured by
Gold Eagle Company
4400 South Kildare Boulevard
Chicago, IL 60632-4372

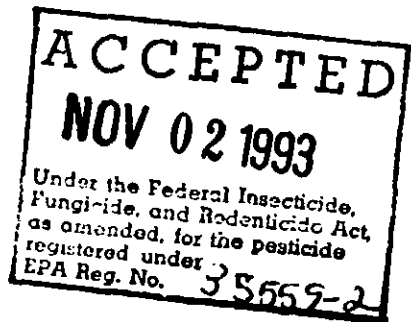

2074

PRECAUTIONARY STATEMENTS

HAZARD TO HUMANS AND DOMESTIC ANIMALS

DANGER: Corrosive. Causes severe eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse. Do not use in closed spaces without adequate ventilation.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not discharge effluent containing this active ingredient into lakes, streams, ponds, estuaries, oceans, or public waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS

Do not use or store near heat or open flame.

ACCEPTED
NOV 02 1993
Under the Federal Insecticide,
Fungicide, and Rodenticide Act,
as amended, for the pesticide
registered under
EPA Reg. No. 35559-2

FOR EASY STARTING AFTER STORAGE

- Keeps stored diesel fuel fresh.
- Inhibits growth of microorganisms in fuel.
- Keeps fuel clear and light colored.
- Keeps filters and injectors clean.
- Minimizes smoking - maximizes fuel economy.
- Compatible with primary fuel/water separator.
- Contains no alcohol.

DIRECTIONS FOR USE:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.


To inhibit growth of microorganisms, use one ounce (30 mL) of DIESEL STA-BIL_® for every 31.25 gallons of diesel fuel or heating oil. As a preventive treatment, use one half ounce (15 mL) for every 31.25 gallons. In hot, humid weather, treat all fuel with DIESEL STA-BIL_® to protect against injector and filter clogging and control of microbial growth.

FOR TREATMENT OF BULK DIESEL FUEL STORAGE TANKS - Never treat an empty tank. Direct contact of DIESEL STA-BIL_® with water phase must be avoided. DIESEL STA-BIL_® must be blended into the fuel phase only and not into the water phase at the bottom of the tank. Add DIESEL STA-BIL_® when tank is at least half full. DIESEL STA-BIL_® is soluble in both fuel and water; it is designed to migrate from the fuel phase to the water phase for control of fungus.

FOR TREATMENT OF DIESEL EQUIPMENT FUEL TANK - Use the same treatment level as above. Run engine 10-15 minutes to ensure complete blending and to allow movement of treated fuel through the injection equipment.

Diesel STA-BIL

2 oz.	Treats
4 oz.	Treats
8 oz.	Treats
12 oz.	Treats
16 oz.	Treats
32 oz.	Treats
1 gallon	Treats
5 gallons	Treats
55 gallons	Treats

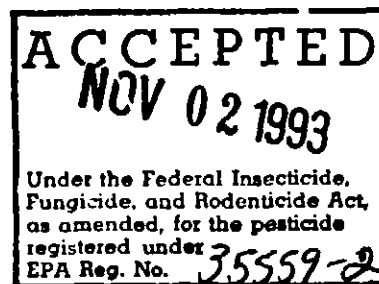

Diesel Fuel

62.5 gallons
125 gallons
250 gallons
375 gallons
500 gallons
1000 gallons
4000 gallons
20000 gallons
220000 gallons

1/28/93

STORAGE AND DISPOSAL:

DO NOT CONTAMINATE WATER, FOOD OR FEED BY STORAGE OR DISPOSAL
STORAGE: DIESEL STA-BIL[®] should be protected from moisture. Containers must be capped tightly when not in use as prolonged exposure to atmospheric moisture can cause formation of solids and loss of effectiveness. Do not transfer to other containers for storage. Discard if product is cloudy or contains solid materials.

PESTICIDE DISPOSAL: Pesticide wastes are acutely toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent) all containers and offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

ACCEPTED
NOV 02 1993
Under the Federal Insecticide,
Fungicide, and Rodenticide Act,
as amended, for the pesticide
registered under
EPA Reg. No. 35559-2

4 5