Made expressly for control of dust. Used as directed, it inhibits the growth of bacteria on floors. Contains a bacteriostatic agent, making it excellent for inhibiting the growth of dust borne bacteria on floors. Designed for easy maintenance and lasting beauty of floor surfaces. Properly treated surfaces remain sanitary and bacteriostatic as long as kept visibly free of dust and dirt by use of this product according to directions.

DIRECTIONS: FLOOR TREATMENT

First clean surfaces by scrubbing with a detergent and water or by using this product as a cleaning agent. After floor has dried, apply this material evenly over entire surface with mop or sprayer.


SPRAYING: Use mechanical or hand pressure sprayer with nozzle adjusted to fine spray. Spray, allowing material to settle over entire surface being treated. Repeat if necessary to produce an even visible film. Cover entire surface for maximum effect.

MOPPING: Saturate mop. Squeeze out excess solution. Then dampen surface with mop.

DIRECTIONS: FOR MAINTENANCE TREATING PUSH-TYPE DUST MOP: Divide length of mop head by 3 to find amount to use. Use 8 ozs. for 24-inch mop head; 6 oz. for 18-inch head, etc. Lay mop head flat. Apply material to mop. Let stand 24 hours. When dirty, remove solled head, wash out. When cleaned and dry, repeat same treatment & method. Rest treated mop heads off floor. Use $\frac{1}{2}$ recom-mended amount if treating mops for wiping waxed sur-faces, gym floors or marble, terrazzo, tile and unwaxed floors. SEALED FLOORS & CONCRETE: Spray regularly weekiy or bi-monthly. Use 1 gal. to 2500-3000 sq. ft. Remove dust daily by wiping with treated mop. WAXED FLOORS OR UNWAXED PAINTED FLOORS: Never spray. Just wipe daily with treated mop. Use only on asphalt and rubber tile if waxed. Maintain by dally sweeping with treated mop. GYM FLOORS: Do not spray. Use mop wiping method. SCRUBBING FLOORS: Floors properly maintained with this product never need scrubbing with soap & water unless to prepare for waxing or sealing. mop. Let stand 24 hours. When dirty, remove soiled head, maintained with this product never need scrubbing with soap & water unless to prepare for waxing or sealing. Remove sticky or muddy soll by mopping with clear warm water. After floor dries, buff with treated mop to remove residue and restore lustre. TERRAZZO, MARBLE & TILE FLOORS should never be sprayed. Maintain same as waxed floors. OLD OILED FLOORS: Regular spraying & wiping alone, as recommended for sealed floors, will gradually bleed out old embedded floor oil deposits. WATER MISCIBLE. MAY BE DILUTED WITH EQUAL PARTS OF WATER. Dilution is recommended for treating PARTS OF WATER. Dilution is recommended for treating sealed or waxed rubber asphalt or composition floors. Water miscibility makes it easy to clean treated mops. DO NOT USE ON UNSFALED ASPHALT OR RUBBER BASE FLOORS.

CAUTION: HARMFUL OR FATAL IF SWALLOWED. Contains Petroleum Distillates. If swallowed, do not induce vomiting. Call physician immediately. Use only in well ventilated areas. Avoid prolonged or repeated contact with skin. Do not spray in presence of open flame or sparks. Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place.

2143 No. 391

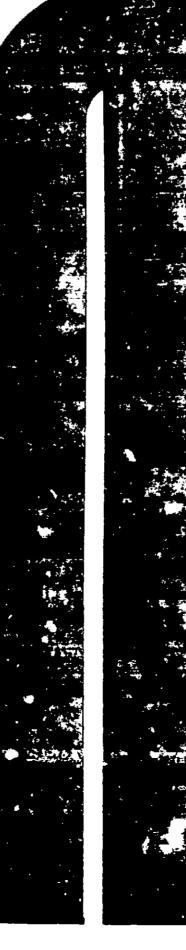

ACTIVE IN Alkyl (C 15%) din **INERT ING** TOTAL EPA REG. No. 257-88

CAUTION: KEEP OUT OF REACH OF CHILDREN **READ PRECAUTIONS ON BACK PANEL** NET CONTENTS: LIQUID GALLON

Manufactured by Fuld Bros., Inc. Baltimore, Maryland 21231 Los Angeles, California 90013





	ڥ, C	;14	18%										C ⁸ - C ¹⁰ 00.25%
GREDI	EN.	TS:.	•								•	•	99.75%
	•	• •	•	•	•	•	•	•	•	•	•		100.00%
No.	257	-88											

