


A trade mark of KEL-GLO CORPORATION

# TROPIC TON

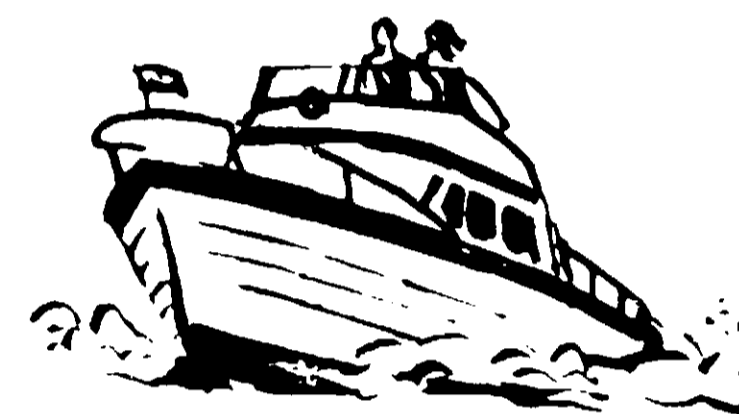

### PRECAUTIONARY STATEMENTS:

#### HAZARDS TO HUMANS:

WARNING! Harmful or fatal if swallowed. This product is a MILD sensitizer to the skin. May cause eye and skin irritation. Do not get in eyes, on skin or on clothing. Wear goggles and rubber gloves when handling. Use protective breathing mask and protective clothing when sanding or spraying. Avoid breathing vapor. USE WITH ADEQUATE VENTILATION!

#### ENVIRONMENTAL HAZARD:

Do not contaminate water by cleaning of equipment or disposal of wastes.

#### PHYSICAL HAZARDS:

WARNING - FLAMMABLE!  
KEEP AWAY FROM HEAT OR OPEN FLAME.

#### FIRST AID:

If swallowed, do not induce vomiting. GET MEDICAL ATTENTION!  
In case of eye contact, flush eyes with plenty of water for at least 15 minutes. CALL A PHYSICIAN IMMEDIATELY! Wash hands and other exposed skin areas with soap and water after use.

#### DISPOSAL STATEMENT:

Do not re-use container.  
DESTROY WHEN EMPTY!

ONE GALLON  
U.S. STANDARD

Made in U.S.A.

**HOLDS UP IN THE TROPICS...OR ANYWHERE**

**HARD VINYL**


**ANTI-FOULING PAINT**

BIS(tribUTYLtin) ADIPATE

**412 GRAY**

#### ACTIVE INGREDIENT

Bis(tributyltin) Adipate....19.14 %  
INERT INGREDIENTS .....80.86 %  
EPA Establishment No. 35923-FL-1  
EPA Registration No. 35923-3

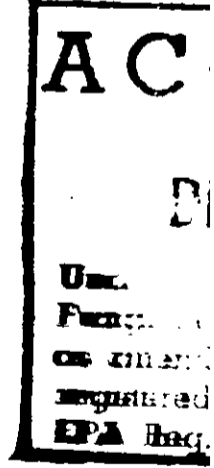

#### WARNING:

See side panel for additional precautionary statements.

ANOTHER FINE PRODUCT FROM



...since 1913 an honored name in paints

# A HARD VINYL ANTI-FOULING PAINT

With Bis(tributyltin) Adipate (BTB)

Recommended for bearing coating at all speeds.

Hard Vinyl type ANTI-FOULING paints usually suffer from the process of LEACHING in contact with a slow moving water surface. TRI-TIN™ is a HARD VINYL ANTI-FOULING PAINT which does not undergo the process of LEACHING in contact with a slow moving water surface.

TRI-TIN™ is a HARD VINYL ANTI-FOULING PAINT with a primary active ingredient ANTI-FOULING ACTIVE INGREDIENT THIS TOXICANT developed by the S.A. Company. Its unique properties and advantages are:

1. It provides a HALO effect protecting hull surface, impared by small scrapes and abrasions.
2. It does NOT promote CORROSION or GALVANIC ACTION on other ALUMINUM or STEEL hulls.
3. It is easily mixed, requiring little stirring as the Bis(tributyltin) Adipate is completely homogenized and will not settle out during application.

## DIRECTIONS FOR USE


It is a violation of Federal Law to use this product in a manner inconsistent with its labelling.

**LAUNCHING:** After the final coat has been applied, the boat can be launched at any time after 12 hours. It can be out of the water for repairs, maintenance, etc. up to 3 months.


The ANTI-FOULING effectiveness will not be impaired by cruise, this paint composition functions ONLY when the boat is in the water.

## APPLICATION:

1. Use brush, spray or roller to keep hull.
2. DO NOT THIN - Use directly from can.
3. Shellac, varnish, or lacquer.
4. Clean brush, roller or equipment with KEL-GLO #604, LACQUER THINNER.

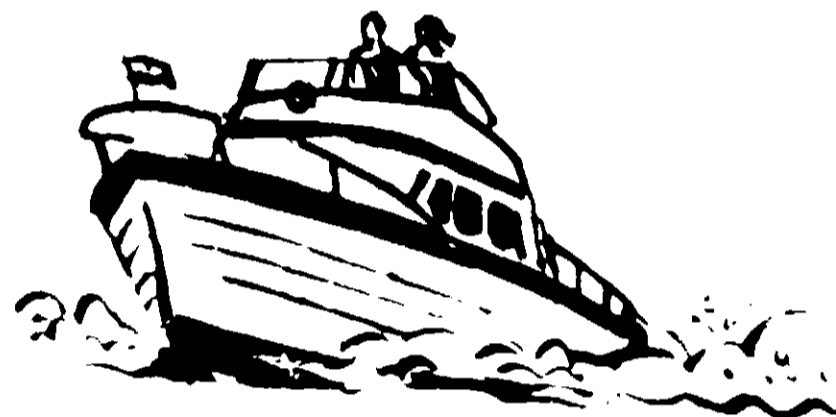

ACTIVE INGREDIENT  
Bis(tributyltin) Adipate.....19.14 %  
INERT INGREDIENTS .....80.86 %  
EPA Establishment No. 35923-FL-1  
EPA Registration No. 35923-3

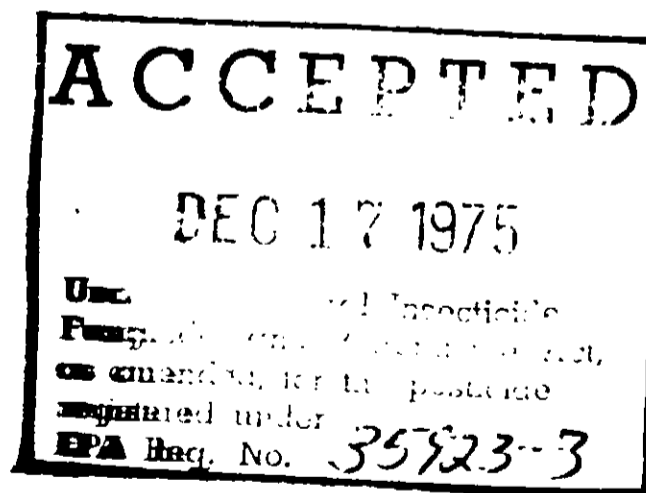

## REPAINT WORK

1. If OLD coating is a VINYL composition, in GOOD condition
  - A. Clean thoroughly and let DRY;
  - B. Apply 2 coats of TRI-TIN™
2. If OLD coating is not a hard, VINYL composition, but in GOOD condition
  - A. Clean thoroughly and let DRY
  - B. Coat ENTIRE hull with KEL-GLO #101, BARRIER PRIMER
  - C. Follow instructions carefully.
3. Apply 2 coats of TRI-TIN™

**NOTE: DRYING TIME BETWEEN COATS: 4 hours under normal conditions.**

## NEW FIBERGLASS HULLS

1. Apply 1 or 2 coats of KEL-GLO #103 FIBERGLASS PRIMER; follow instructions.
2. Apply 2 coats of TRI-TIN™

## NEW ALUMINUM or STEEL HULLS

1. Apply KEL-GLO #102 ZINC CHROMATE PRIMER, following instructions carefully.
2. Apply 2 coats of TRI-TIN™

## NEW WOOD HULLS

1. Sand to a smooth finish.
2. Apply 1 or 2 coats of KEL-GLO #101 FIBERGLASS PRIMER; follow instructions.
3. Apply 2 coats TRI-TIN™

## WARNING:

See side panel for additional precautionary statements.

KEL-GLO CORPORATION, 54 NORTHEAST 73RD STREET, MIAMI, FLORIDA 33138

A trade mark of KEL-GLO CORPORATION

# TROPIC TON

ACCOUNTED

DEFENSE

Use as directed. Do not use on painted surfaces.

as directed. Do not use on painted surfaces.

registered trademark of Kel-Glo Corporation

EPA Reg. No. 35923-9



### PRECAUTIONARY STATEMENTS:

#### HAZARDS TO HUMANS:

**WARNING!** Harmful or fatal if swallowed. This product is a MILD sensitizer to the skin. May cause eye and skin irritation. Do not get in eyes, on skin or on clothing. Wear goggles and rubber gloves when handling. Use protective breathing mask and protective clothing when sanding or spraying. Avoid breathing vapor. USE WITH ADEQUATE VENTILATION!

#### ENVIRONMENTAL HAZARD:

Do not contaminate water by cleaning of equipment or disposal of wastes.

#### PHYSICAL HAZARDS:

**WARNING — FLAMMABLE!**  
KEEP AWAY FROM HEAT OR OPEN FLAME.

#### FIRST AID:

If swallowed, do not induce vomiting. GET MEDICAL ATTENTION!  
In case of eye contact, flush eyes with plenty of water for at least 15 minutes. CALL A PHYSICIAN IMMEDIATELY! Wash hands and other exposed skin areas with soap and water after use.

#### DISPOSAL STATEMENT:

Do not re-use container.  
DESTROY WHEN EMPTY!

ONE GALLON  
U.S. STANDARD

Made in U.S.A.

## HOLDS UP IN THE TROPICS...OR ANYWHERE

### HARD VINYL

## ANTI-FOULING PAINT

WITH BIS (TRIBUTYL TIN) ADIPATE

# 406 RED

KEEP OUT OF REACH OF CHILDREN

ACTIVE INGREDIENT	
Bis (tributyltin) Adipate	19.14%
INERT INGREDIENTS	80.86%
EPA Establishment No.	35923-FL-1
EPA Registration No.	35923-9

### WARNING:

See side panel for additional precautionary statements.

ANOTHER FINE PRODUCT FROM



...since 1913 an honored name in paints