

MARINE

BOTTOM COAT

BLUE

DANGER!

May be fatal if inhaled.
Irritates eyes, nose, throat, and lungs.
Irritates skin.
Avoid contact with eyes, nose, throat, and lungs.
Avoid contact with skin.
Wash hands thoroughly with soap and water after use.
Do not breathe vapors.
Do not get in eyes, nose, or mouth.
If you get it in your eyes, flush with water for 15 minutes.
If you get it on your skin, wash with soap and water.
If you get it on your clothes, wash them separately.
Do not use near open flames or heat.
Do not use in confined spaces.
Do not use in poorly ventilated areas.
Do not use in the presence of fire or heat.
Do not use in the presence of sparks or flames.
Do not use in the presence of hot surfaces.
Do not use in the presence of hot liquids.
Do not use in the presence of hot gases.
Do not use in the presence of hot steam.
Do not use in the presence of hot air.
Do not use in the presence of hot dust.
Do not use in the presence of hot ash.
Do not use in the presence of hot slag.
Do not use in the presence of hot metal.
Do not use in the presence of hot oil.
Do not use in the presence of hot grease.
Do not use in the presence of hot wax.
Do not use in the presence of hot resin.
Do not use in the presence of hot plastic.
Do not use in the presence of hot rubber.
Do not use in the presence of hot leather.
Do not use in the presence of hot wood.
Do not use in the presence of hot stone.
Do not use in the presence of hot brick.
Do not use in the presence of hot concrete.
Do not use in the presence of hot masonry.
Do not use in the presence of hot metal.
Do not use in the presence of hot glass.
Do not use in the presence of hot ceramic.
Do not use in the presence of hot porcelain.
Do not use in the presence of hot enamel.
Do not use in the presence of hot paint.
Do not use in the presence of hot varnish.
Do not use in the presence of hot lacquer.
Do not use in the presence of hot ink.
Do not use in the presence of hot dye.
Do not use in the presence of hot pigment.
Do not use in the presence of hot filler.
Do not use in the presence of hot resin.
Do not use in the presence of hot plastic.
Do not use in the presence of hot rubber.
Do not use in the presence of hot leather.
Do not use in the presence of hot wood.
Do not use in the presence of hot stone.
Do not use in the presence of hot brick.
Do not use in the presence of hot concrete.
Do not use in the presence of hot masonry.
Do not use in the presence of hot metal.
Do not use in the presence of hot glass.
Do not use in the presence of hot ceramic.
Do not use in the presence of hot porcelain.
Do not use in the presence of hot enamel.
Do not use in the presence of hot paint.
Do not use in the presence of hot varnish.
Do not use in the presence of hot lacquer.
Do not use in the presence of hot ink.
Do not use in the presence of hot dye.
Do not use in the presence of hot pigment.
Do not use in the presence of hot filler.

KEEP OUT OF REACH OF CHILDREN!

DANGER! KEEP OUT OF REACH OF CHILDREN.
WARNING! FLAMMABLE! KEEP AWAY FROM HEAT OR OPEN FLAME.
SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONS.

Active Ingredient	
n-Butyltin fluoride	11.43%
Inert Ingredients	88.57%
Total	100.00%

Do not contaminate water
of equipment or disposal
Do not re-use empty con
stroy it by perforating o
Bury or discard in a safe pl

MARINE

BOTTOM COAT

BLUE

DANGER!

May be fatal if swallowed.
May cause eye damage.
May be absorbed through skin.
Causes skin irritation.
Do not spray; apply by brush or roller only.
Use with adequate ventilation.
Wear goggles or face shield when handling.
Do not get in eyes, on skin, or clothing.
In case of skin contact remove contaminated clothing and immediately wash skin with soap and water.
If irritation persists, get medical attention.
Wash contaminated clothing before reuse.
For eyes, flush with plenty of water and get medical attention.
Avoid storage near food and feed products.
Avoid breathing vapors.

EAP Reg. No. 35926-1
EPA Est. No. 37870-NJ-01

KEEP OUT OF REACH OF CHILDREN!

DANGER! KEEP OUT OF REACH OF CHILDREN.
WARNING! FLAMMABLE! KEEP AWAY FROM HEAT OR OPEN FLAME.
SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONS.

Active Ingredient	
tributyltin fluoride	11.43%
Inert Ingredients	<u>88.57%</u>
Total	100.00%

**Do not contaminate water
of equipment or disposal
Do not re-use empty con
stroy it by perforating o
Bury or discard in a safe pla**

ACCEPTED
NOV 19 1981
Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, for the purpose of registration under EPA Reg. No. 39


MARINE

BOTTOM COAT

BLUE

Active Ingredient	
tributyltin fluoride	11.43%
Inert Ingredients	88.57%
Total	100.00%

Do not contaminate water by cleaning of equipment or disposal of wastes. Do not re-use empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.

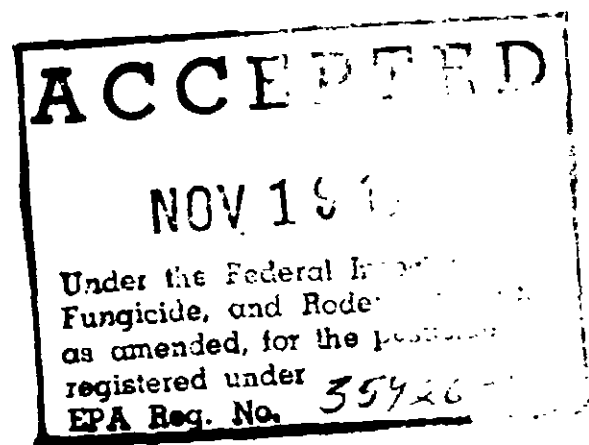

DIRECTIONS

X-Foul Bottom Coat is a new bottom coating formulated for control of many marine organisms. This paint is based on bioMeT* tributyltin fluoride, a powerful antifouling ingredient. It can be applied to wooden, steel, aluminum and fiberglass hulls and is suitable for fast-moving craft. Recoating is possible in three or four hours, but paint should be allowed to dry overnight before launching. Always apply the paint liberally with a full brush or roller.

WOODEN HULLS

On bare wood, apply two full coats directly to the wooden surface. On old work X-Foul Bottom Coat may be applied over clean, dry, firm surfaces, provided the previous paint was a vinyl or epoxy type. All other types of paint should be removed to the bare wood.

METAL HULLS

Unpainted steel or aluminum should be treated with a suitable wash primer. Allow to dry 1 hour. For aluminum, this should be followed by two coats of X-Foul Bottom Coat. For steel hulls, follow the wash primer coating with two coats of vinyl anti-corrosive, allowing 4 hours between coats; and then, two coats of X-Foul Bottom Coat.

For recoating of metal hulls, follow instructions for recoating wood.

FIBERGLASS HULLS

Sand new hulls and clean off grit with a suitable solvent such as mineral spirits. Follow this with one coat of an epoxy undercoat. Let cure overnight at 60° or over. Follow with two coats of X-Foul Bottom Coat. For painting over old work, follow instructions for painting wood.

KEEP OUT OF REACH OF CHILDREN!

ONE GALLON—U. S. STANDARD MEASURE—MADE IN U. S. A.

*Trademark of M & T Chemicals, Inc.

**KEEP OUT OF REACH OF CHILDREN.
KEEP AWAY FROM HEAT OR OPEN FLAME.
SEE LABEL FOR ADDITIONAL PRECAUTIONS.**