


Area Code 412
462-7134

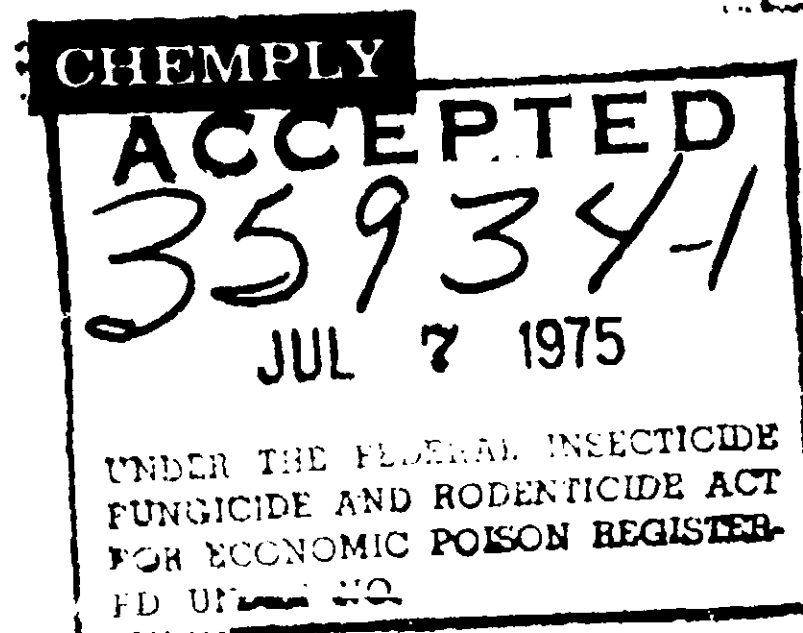

CHEMPLY, INC.

INDUSTRIAL CHEMICALS

P. O. Box 18049 • PITTSBURGH, PA. 15236

June 17, 1975

CHLORINE



ACTIVE INGREDIENT: CHLORINE 100%

NET CONTENTS **150** pounds
EPA Reg. No. 35934-1

DANGER -- POISON

KEEP OUT OF REACH OF CHILDREN

NOT REATMOSPHERICALLY STABLE AND GAS UNDER PRESSURE

Do not breathe vapors.

Do not get this in or on clothing. This gas
may irritate eyes and skin.

Have available nearest fire department and fire department. Mines for chlorine service.

Handle with care only. Do not inhale vapors. Do not get this in or on clothing. Do not
get this in or on skin.

IN CASE OF FIRE: Use water spray to cool. Do not use water directly on fire. Do not
use dry chemical.



Distributed by: **Chemply, Incorporated**
ELIZABETH, PA. 15037

SIDE 1

"The valve outlet on this container complies with American National Standard B 57.1. To
connect the discharge line, unscrew valve outlet cap and attach yoke and adapter or special
union connector. Do not use pipe fittings. Use new gasket each time connection is made.

KEEP OUT OF REACH OF CHILDREN
NONFLAMMABLE LIQUID AND GAS UNDER PRESSURE

Do not heat container

Do not breathe air containing this gas

Do not get in eyes or on skin

Have available gas masks approved by the U. S. Bureau of Mines for chlorine service

Handle and use only in accord with practice recommended in the Chlorine Manual published by The Chlorine Institute, Inc., New York

IN CASE OF EXPOSURE, move patient to fresh air. Keep him warm and quiet.
Call a physician



If breathing is stopped give artificial respiration

Distributed by: Chemply, Incorporated
ELIZABETH, PA. 15037

SIDE 1

"The valve outlet on this container complies with American National Standard B 57.1. To connect the discharge line, unscrew valve outlet cap and attach yoke and adapter or special union connector. Do not use pipe fittings. Use new gasket each time connection is made.

Open valve by turning to left (counter clockwise) one complete turn, using 3/8" square box wrench. Special wrench can be purchased from us.

Packing nut may be slightly loosened if necessary to relieve tight valve; retighten promptly to avoid leak. Do not overtighten.

When using ton containers place them so valves are in a vertical line. Top valve will deliver gas and bottom valve will deliver liquid.

When container is empty, close valves securely, replace valve outlet cap(s) and replace valve protection hood."

Chemply, Incorporated
ELIZABETH, PA. 15037

