


35977-21

PM 21

1063

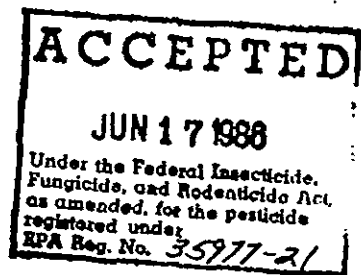

READY-TO-USE

NYTEK™10WP

A Fungicide Product To Control Wood Decay
And Repel Water

ACTIVE INGREDIENTS.....0.25%
(Copper 8-Quinolinolate)

INERT INGREDIENTS.....99.75%

Contains 0.185 lb. active ingredient per gallon

KEEP OUT OF REACH OF CHILDREN

See Cautions on Back Panel


Net Volume

(1, 5, or 55 Gallon)

E.P.A. Reg. No. 35977-21

E.P.A. Est. No. 33766-IN-01

MAAG AGROCHEMICALS INC.
P.O. Box 6430
5699 North Kings Hwy. (58th Ave.)
Vero Beach, FL 32961

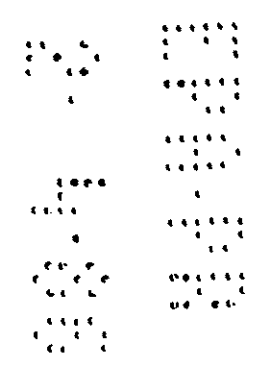

PRECAUTIONARY STATEMENTS

Hazards to Humans (and Domestic Animals)

CAUTION

Do Not Allow Contact With Skin. If Splashed On Skin, Wash Thoroughly With Soap And Water. Do Not Allow Material To Be Splashed In Eyes, Wear Goggles And Rubber Gloves When Handling. If Splashed In Eyes Wash Eyes Immediately With Copious Amounts of Water and Secure Immediate Medical Attention.

Do not apply this product to animals, plants, potable water, food or feedstuffs. Do not use where treated wood will be in frequent or prolonged contact with bare skin. To prevent possible injury to desirable plants, plants should be covered if they may be contacted by the solution during treatment.

FIRST AID

HARMFUL IF SWALLOWED

If Swallowed, Drink 1 or 2 Glasses of Milk. Get Medical Attention.

ENVIRONMENTAL HAZARDS

This Product is Toxic To Fish. Do Not Contaminate Water By Cleaning Of Equipment, Or Disposal of Wastes. Do not apply directly to water.

PHYSICAL OR CHEMICAL HAZARDS

Do Not Use, Pour, Spill or Store
Near Heat or Open Flame

STORAGE AND DISPOSAL

Pesticide Disposal

Do not contaminate water, food, or feed by storage or disposal. Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your state pesticide or environmental control agency, or the hazardous waste representative at the nearest EPA regional office for guidance.

Container Disposal

Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved State or Local procedures.

- READY-TO-USE NYTEK™10WP-

PROTECTS WOOD BY CONTROLLING DECAY AND REPELLING WATER
INHIBITS GROWTH OF MILDEW AND MOSS

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product
in a manner inconsistent with its labeling.

DESCRIPTION: It is a water repellent formulation of copper-8-quinolinolate designed for the treatment of lumber by the dip or brush-on process to control wood decay. NYTEK 10WP is insoluble in water.

USES: For Wood Not In Contact With The Ground
Use as a dip or brush-on treatment for wooden patio decks, benches, railings, shakes or shingles, millwork and interior holds of boats. Wood rot protection is only needed on interior use wood which is subject to frequent or prolonged wetting, for example, from condensation or rain seepage. Other uses include framing lumber for shower stalls and on wood around swimming pools. Treated wood can be painted or stained (except with water-based stains). NYTEK 10WP can also be used to prevent moss and mildew growth on brick, masonry, shakes and shingles.

COMPOSITION: Solubilized copper-8-quinolinolate plus water repellents in light solvent conforming to AWWA Specification P-8, and containing a minimum of 0.25% by weight of copper-8-quinolinolate as active ingredient.

INSTRUCTIONS FOR TREATING WOOD: Wood to be treated should be dry, seasoned and free of bark and foreign matter for best results. Wood should be dipped in solution for 3 minutes. For brush-on treatment, get as much Nytek 10WP on the wood as possible without excessive run-off. Let dry and apply another heavy coat. Wood should then be left to air dry until it is free of all solvent odor. Lumber should be milled and trimmed to correct length before treatment.

HANDLING: Since the ready-to-use treating solution contains mineral spirits, proper precaution should be taken to insure adequate ventilation when handling. It should not be applied in the presence of heat or open flame. Smoking during application should not be permitted in the area. Suitable work clothing, gloves, and safety glasses should be worn during the application.

COVERAGE AND PROTECTION

NYTEK 10WP will treat 150 to 200 square feet of wood by brush-on treatment depending upon the type of wood and its condition. Dip-ping will treat less wood. Treatment will provide protection for 2 or more years and extend service life accordingly. For continued protection, treatment should be repeated every 2 years where possible.

Seller makes no warranty, expressed or implied, concerning the use of these products other than as indicated on the label. Buyer assumes all risk of use and/or handling of these materials when use and/or handling is contrary to label instructions.