


# WASP - 15

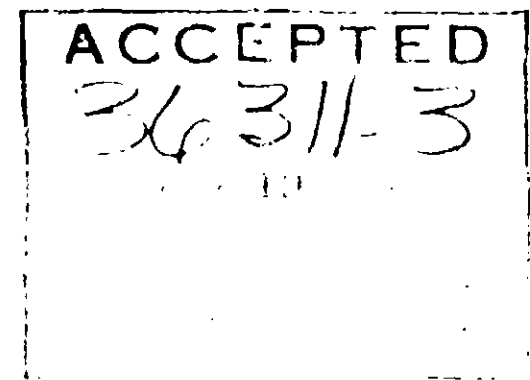

ACTIVE INGREDIENTS . . . . . 15.0%  
poly[oxyethylene(dimethyliminio)ethylene(dimethyliminio)ethylene  
dichloride] . . . . . 15.0%

INERT INGREDIENTS . . . . . 85.0%

Weight per gallon . . . . . 8.58 lbs  
Weight of active ingredients per gallon . . . . . 1.29 lbs

### APPLICATION

WASP-15 is used to control algae, bacteria, and fungi in recirculating commercial and industrial water cooling towers. Prior to its use, systems must be cleaned to remove algal growth, microbiological slime and other deposits. An initial slug addition of 4.0 to 10.0 fluid ounces of WASP-15 per 1000 gallons of water to provide a concentration of 32 to 80 parts per million of WASP-15 based on the total weight of water in the system is recommended. Repeat initial dosage until control is evident. Subsequent slug additions of 1.0 to 10.0 fluid ounces of WASP-15 per 1000 gallons of water (8 to 80 parts per million of WASP-15) should be employed every 2 to 5 days or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the microbiological problem. Slug additions should be made in the sump of water cooling towers.

### CAUTION

#### KEEP OUT OF THE REACH OF CHILDREN

Harmful if swallowed, Do not get in eyes. Avoid contact with skin. In case of contact, flush with plenty of water for at least 15 minutes. Remove and wash Contaminated clothing before reuse. If eye irritation persists, get medical attention.

Avoid contamination of food.

This product is toxic to fish. Do not discharge treated effluent where it will drain into lakes, streams, or ponds. Do not contaminate water by cleaning of equipment or disposal of wastes.

Use only as directed on label.

Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place.

EPA Registration No: 36311-3  
EPA Establishment No: 7701-Tn-1

NET WEIGHT 463 lbs

### MANUFACTURED BY

ANLO, INC.  
5881 Macinness Ave.  
Memphis, Tennessee 38117