
SEMMULE PAINT

WOOD PRESERVATIVE

EPA REG. NO. 36369-1

COPPER NAPHTHENATE

EPA-EST-36369 FL-1

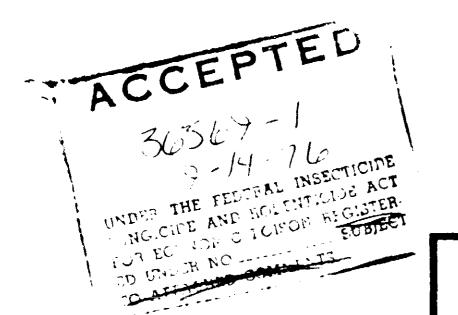

Active Ingredients

Copper Naphthenate	10°
Petroleum Solvent	9 0°
	100°
Copper as metallic] 0

CAUTION KEEP OUT OF REACH OF CHILDREN

Harmful or Fatal of Swallowed. Contains Petroleum Mineral Spirits and Copper Naphthenate. If swallowed, do not induce vomiting. CALL PHYSICIAN.

CAUTION

Flammable Keep away from heat and open flame. Use with adequate ventilation, avoid breathing vapor. Do not transfer contents to bottle or other container. Close container after each use.

CONTENTS ONE U.S. GALLON (3.785 LITERS)

TAMPA PAINT & VARNISH COMPANY

9504 E. ADAMO DRIVE, TAMPA, FLORIDA 33622



EPA-EST-36369 FL-1

ON

y from heat and lequate ventilation, . Do not transfer er container. Close

NY

WOOD PRESERVATIVE

Clean posts, poles, heavy timbers and wooden supports of all excess bark and foreign material, and immerse for period of 12 to 48 hours to guard against rot, termites, decay and power post beetles. Alternate application may be by dipping for 3 minutes per inch of thickness of material or flood-brush two coats generously over entire surface.

Do Not Contaminate Water by Cleaning of Equipment or Disposal of Waste.

DO NOT RE-USE CONTAINER

CONTENTS ONE U.S. GALLON (3.785 LITERS)