



**BACTERIOSTATIC
RENATURALIZER
WATER SYSTEM**

ACTIVE INGREDIENT	
Metallic Silver	0.08%
INERT INGREDIENTS	99.92%

**KEEP OUT OF REACH OF CHILDREN
...CAUTION...**

FOR PROPER USE REFER TO FURNISHED INSTRUCTIONS

CONTAINER DISPOSAL

- When unit is exhausted call your dealer for media replacement or wrap securely in newspaper and dispose of with trash

EPA Registration No. 37589-6
EPA Establishment No. 37589-FL 1

Bestech, INC.


442 South Dixie Highway, East
Pompano Beach, Florida 33060
(305) 785-4550

NET CONTENTS
ONE (1) MOUNTAIN STREAM BACTERIOSTATIC WATER RENATURALIZER UNIT



RECEIVED
JUL 3 1990
No. 37589-6

MOUNTAIN STREAM
BACTERIOSTATIC RENATURALIZER WATER UNIT
WHOLE HOUSE INSTALLATION

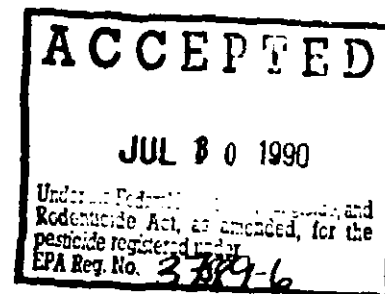

DIRECTION FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling

INSTALLATION AND OPERATION INSTRUCTIONS

The Mountain Stream Bacteriostatic Renaturalizer Water Unit is a unit designed to improve the quality of your present water supply. It should be plumbed into the main supply line into the house.

CAUTION:

Do not run hot water into this unit. It is not for use on uncertain water supplies. This unit is designed for use on municipally treated tap water or with wells that have been tested for bacteriological safety.

- #1. Plumb incoming water supply line to inlet of unit.
- #2. A. The unit must be flushed before connecting the outlet. Allow water to flow at a high rate for 5 - 10 minutes or until it is clear. The discharge can be collected in a bucket or a garden hose adapter may be used. Do not use this water.
- B. If unit is equipped with optional back wash system, put in service position for 1 minute, then through a regular back-wash cycle. Place in service position until it runs clear. Do not use this water.
- #3. Connect the outlet into the house supply line. Unit is now ready for service.

The Mountain Stream Bacteriostatic Renaturalizer Water Unit is effective through 75,000 gallons of water. It is estimated that a family of three will use 200 gallons of water per day for a period of one year. An indication of exhaustion would be a loss in efficiency of the unit in removing chlorine taste, color and odor, or if the flow of water begins to diminish. At first sign of exhaustion, call your Mountain Stream Bacteriostatic Renaturalizer Water Unit dealer to replace the media.

SPECIFICATIONS

For Cold Water Use Only	
Maximum Flow Rate	8 G.P.M.
Maximum Operating Pressure	100 PSI
Unit Material	Fiberglass

