

Directions for use as a microbiocide for use in industrial recirculating water cooling towers to reduce the number of living algae.

Begin treatment when the system is in jeopardy of becoming effected or after cleaning systems whose efficiency is already impaired.

Initial Dose: When the system is noticeably fouled, apply 1/4 lb. (4 briquettes) to 1/2 lb. (8 briquettes) of BB-90 per 700 gallons of water in the system. Repeat until control is achieved.


Subsequent Dose: When microbial control is evident add 18 lb. (2 briquettes) to 14 lb. (4 briquettes) of BB-90 per 700 gallons of water in or as needed to maintain control. Badly fouled systems must be cleaned before treatment is begun.

Feed BB-90 at the sump of industrial recirculating water cooling towers.

DO NOT reuse container. Destroy when empty.

Sold By:

SOUTHERN TESTING AND RESEARCH LABS., INC. Water-Guard Division 607 Park Ave. Wilson, N. C. 237-4175

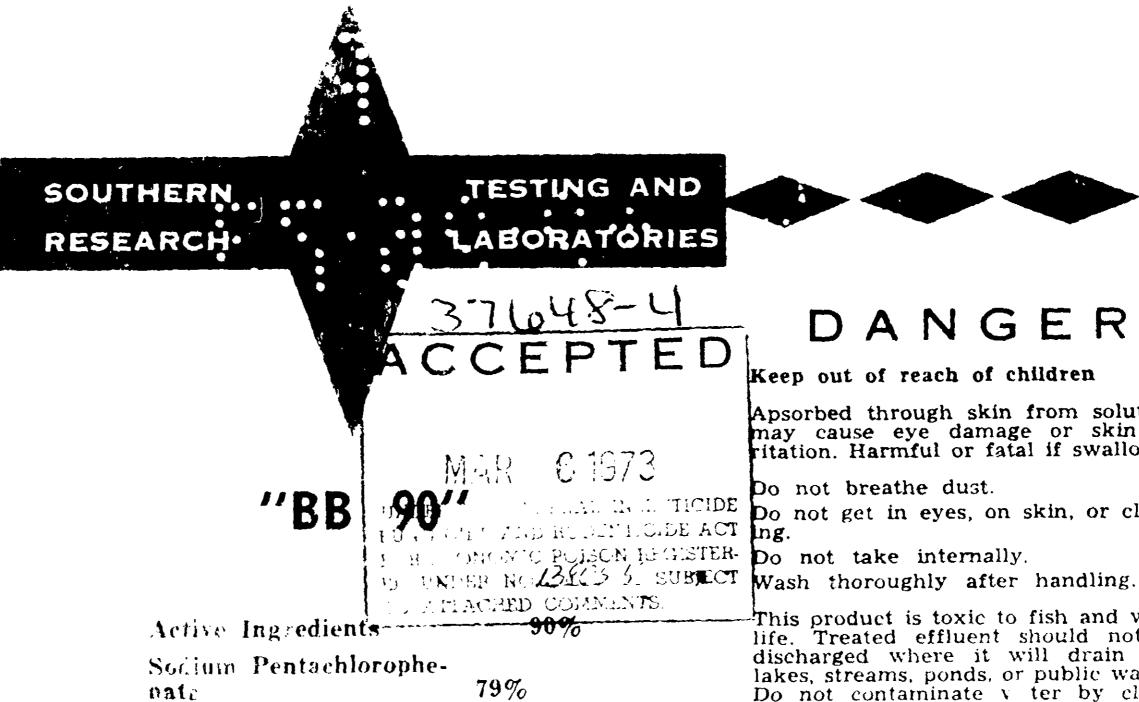

Sodium Salts of other chlorphenates

Inert Ingredients

10%

11%

NET WEIGHT

1 oz. per briquette EPA Reg. No. 13805-5

DANGER

Keep out of reach of children

Apsorbed through skin from solution, may cause eye damage or skin ir-ritation. Harmful or fatal if swallowed

Do not breathe dust.

Do not get in eyes, on skin, or cloth-

This product is toxic to fish and wildlife. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public waters. Do not contaminate v ter by cleaning of equipment, or disposal of

wastes. Apply this product only as specified on this label.

FIRST AID

External-Wash freely with soap and water.

Eyes-Flush for at least 15 minutes with water

Internal - Induce vomiting.

CALL PHYSICIAN

