Purity Bacteriostatic Water Trentment Unit

Model 514 C.C. CAUTION

KEEP OUT OF REACH OF CHILDREN

Refer to instructions for proper installation and use.

When treatment ingredient is exhausted return unit to fact by for eplacement.

ACTIVE INGREDIENT Sign has elementable INERT INGREDIENTS

तः वयं व्यक्त

FPA Reg. No. 37690-1 FPA Establishment No. 37690F101

> NATIONAL PURITY WATER, INC. 21 J.E. 10th St. Deerfield Beach, Fla. 33441

Contents

1 Bacteriostatic Water Treatment Unit

Unions Production of the State of the Business of the American of the State of the

Transferred to 39100-1

INSTALLATION AND OPERATING INSTRUCTIONS

GENERAL CLASSIFICATION


It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

Your Purity Bacteriostatic Water Treatment Unit is fully charged with activated carbon and silver carbon to provide maximum efficiency of absorption as represented in our brochure.

Placement of unit under sink in rear is most desirable. The following steps must be followed for proper installation.

- 1 Make certain all fittings on unit are screwed tight to prevent leaking
- 2. Locate pipe to be used for water source. Measure amount of 1.4'.

 O.D. copper tubing required (available at most hardware stores.)
- 3. Attach self tapping valve on water line (see attached instruction sheet).
- 4. Drill 1/2 inch hole in top sink at convenient place for use. If you want the hole drilled in enamel sink extreme care must be taken to prevent chipping of enamel, we suggest a piece of adhesive tape be placed on enamel where hole is to be drilled; a very small hole with a 1/16 drill should be first made then 1/8 drill; then 1/4 drill, lastly 1/2" drill, keeping tape secured during drilling. An escutcheon is provided to cover any small chipping which may occur. If possible, it will be found much easier to drill 1/2" hole beyond the enamel sink. No difficulty will be found in drilling a hole in stainless steel or vinyl tops.
- 5. With all connections properly made, follow instructions on tapping valve information sheet on starting water flow.
- 6. Turn on gooseneck faucet and allow water to run thru device for at least 20 minutes, water will appear dark and cloudy at first but should completely clear up after the 20 minute period and be ready to produce clarified water.
- 7. An optional ice maker connection kit is available at a minimum charge. This kit furnishes a tee fitting that is attached to the outlet side of **Purity Bacteriostatic Water Treatment Unit**. This will connect unit with the line to the ice cube maker. The **Purity Bacteriostatic Water Treatment Unit** will deliver fine tasting water to both the gooseneck faucet and your ice cube maker.



The replacement of Purity Bacteriostatic Water Treatment Unit is recommended at 2500 gallon usage Replacement can be done by contacting your local factory representative or by shipping unit to factory

Unit may be removed by following these steps.

- a. close valve (turn clockwise)
- b. open faucet to relieve pressure
- c. loosen fittings on inlet and outlet sides of unit
- d. unit now can be returned to local dealer or Purity Bacteriostalia: Water Treatment Unit factory. Address listed below

NATIONAL PURITY WATER, INC. 21 S.E. 10th STREET, DEERFIELD BEACH, FL 33441

EPA Establishment No. 37690FL01

EPA Req. No. 3169 1

Purity Bacteriostatic Water Treatment Unit

Manufacturers & Distributors of Water Treatment Controls

PHONE 305-428-3535

The famous name for Crystal Clear drinking water

finest tasting water from your tap



thoroughly tested for a 2500 gallonage volume to insure that the Silver concentration in the treated drinking water will never exceed the maximum level of 50 parts per billion allowed for potable drinking water.

This product with Bacteriostatic activity has been

The total life of the unit is up to 2500 gallons of water depending upon the quality and clarity of tap water being processed.

Have a Water Problem!
for drinking . . .
for cooking . . .
for economy . . .
See Us.

You deserve better water. free estimate.

A HAPPY FAMILY


ACT NOW!

Join the happy family

Enjoy delicious crystal clear water. You will be delighted with the rich taste of your coffee — your tea will have a natural flavor — mixed drinks and ice cubes will taste better. Baby formula will have no objectionable taste or odor — cooked foods will taste richer.

Removes rust, sediment, suspended solids, bad taste, odors, chlorine and inhibits the growth of bacteria within the unit.

EPA Establishment No. 37690FL01 EPA Ren No. 37690-1

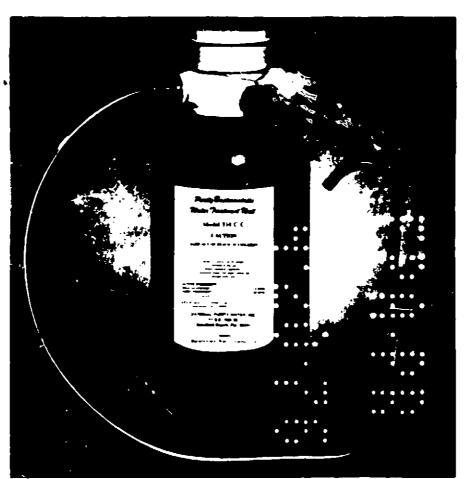


Model - 514 C C

NATIONAL PURITY WATER, INC. 21 S.E. 10th STREET, DEERFIELD BEACH, FL 33441

Purity Bacteriostatic Water Treatment Unit

unit dimensions (minimum)
flow rate
operating pressure maximum 127.5 p s.i.
hydrostatic test pressure 300 p.s.i.
operating temperature
bacteriostatic filtering material approx. 5 lbs.
valve, tubing and fittings according to locality plumbing code
faucet nickel plate brass
connection cold water line only with self tapping valve
extension refrigerator ice maker (optional).

This unit is capable of treating 7 gallons of water for drinking daily for a year before gallonage limitation has been reached and the unit must be replaced.

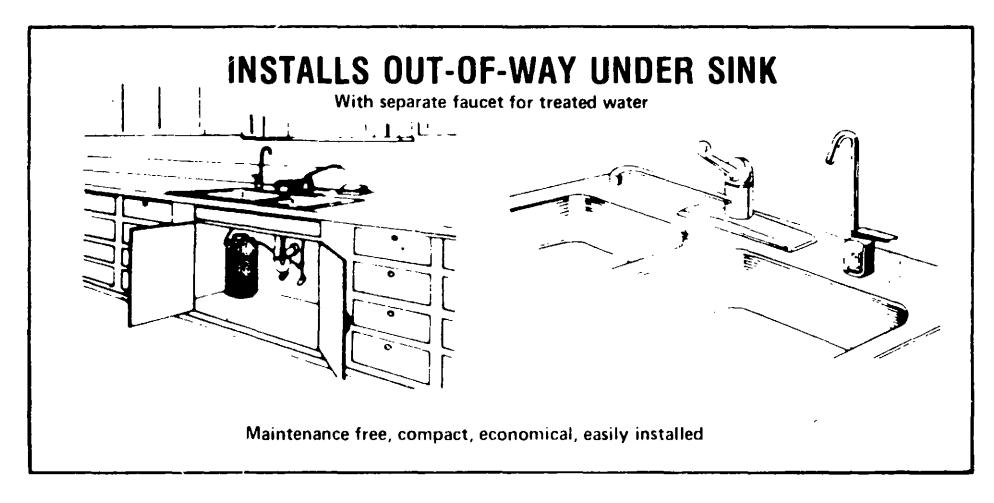

PRACTICAL USES

Represented by:

The unit may be used to treat municipal notable tap water supply.

note may be installed in the home, condominium, restaulant, hospitals, factories for treating water used for drinking and cooking.

NATIONAL PURITY WATER, INC.
SALES OFFICE: Manufacturer & Distributor
21 S.E. 10th Street, Deerfield Beach, Florida 33441