

APR 20 1990

BEST AVAILABLE COPY

**Filtercold Corporation Inc
1840 East University Drive Suite 2
Tempe Arizona 85281**

**Attention: Allen Bernstein
President**

**Product Name: Microlens Bacteriostatic Water Filter Unit CTM Countertop
Model FC1-3
EPA Registration Number 39446-3
Submission Dated April 2, 1990**

The amendment referred to above, submitted in connection with registration under FIFRA, is acceptable provided that you:

1. Make the labeling changes listed below before you release the product for shipment bearing the amended labeling:
 - a. Place the signal word: "CAUTION" to appear directly below the "KEEP OUT OF REACH OF CHILDREN."
 - In addition delete the colon (:).
 - b. Place the company name and company address directly on the label.
 - c. Revise the word: "Contents" to read "Net contents."
 - d. Clearly indicate that this unit has a useful life of three years depending upon daily usage.
 - e. Add the heading: "Directions for Use" to the installation instruction Bulletin.

58268;I;V.G.;L-1;KENCO;4/18/90;5/17/90;dg

CONCURRENCES

SYMBOL							
SURNAME							
DATE							

- f. Delete the word "Activated Carbon".
- g. Revise "Inert Ingredient" to "Inert Ingredients."
Add the letter "s".


2. Your release for shipment of the product bearing the amended labeling constitutes acceptance of these conditions.

A stamped copy of the labeling is enclosed for your records.

3. Note: As per conversation with the Agency, this label will supersede all previous labels. The 15,000 gallon label will replace the 2,000 gallons label.

If you have any questions concerning this letter, contact Valdis Goncarous at (703) 557-3663.

Sincerely yours,


 John H. Lee
 Product Manager (31)
 Antimicrobial Program Branch
 Registration Division (H7505C)

RECEIVED (mirrored stamp)

3 of 5

**MICROLENE
BACTERIOSTATIC WATER
FILTER UNIT**

CTN COUNTERTOP Model AC1-3

For home use; recommended location countertop.

ACTIVE INGREDIENT:
Metallic Silver 1.05%

INERT INGREDIENT:
Activated Carbon 98.95%

CAUTION: KEEP OUT OF REACH OF CHILDREN.

DISPOSAL: Wrap spent filter in newspaper and discard in trash.

For use on municipally treated tap water only. Install in cold water line only.

Maximum flow rate: 1.00 gallon per minute
Total gallonage: 15,000 gallons

This unit has a capacity of up to 15,000 gallons, and it is capable of treating an average of 8 gallons of cold tap water daily with a maximum flow rate of 1.00 gallon per minute at a maximum water pressure of 125 psi and a maximum temperature of 100 degrees F. Near the end of this period, a diminished flow will be noticed. This will indicate the unit is nearing the end of its useful life and should be replaced.

EPA Reg. No. 39446-3
EPA Est. No. 39446-AZ-01

See enclosed leaflet for directions and instructions.

Contents: One (1) Bacteriostatic water filter unit, model CTN.

ACCEPTED
with COMMENTS
in EPA Letter Date:


APR 20 1990

blank3.epa

Under the
Fungicide
as amend
reg. Sterc
39446-3

INFORMATION & INSTALLATION INSTRUCTIONS
ON YOUR MICROLENE ^{Bacteriostatic} WATER FILTER UNIT MODEL PC1-3
CTN Countertop

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS
PRODUCT IN MANNER INCONSISTENT WITH ITS LABELING.

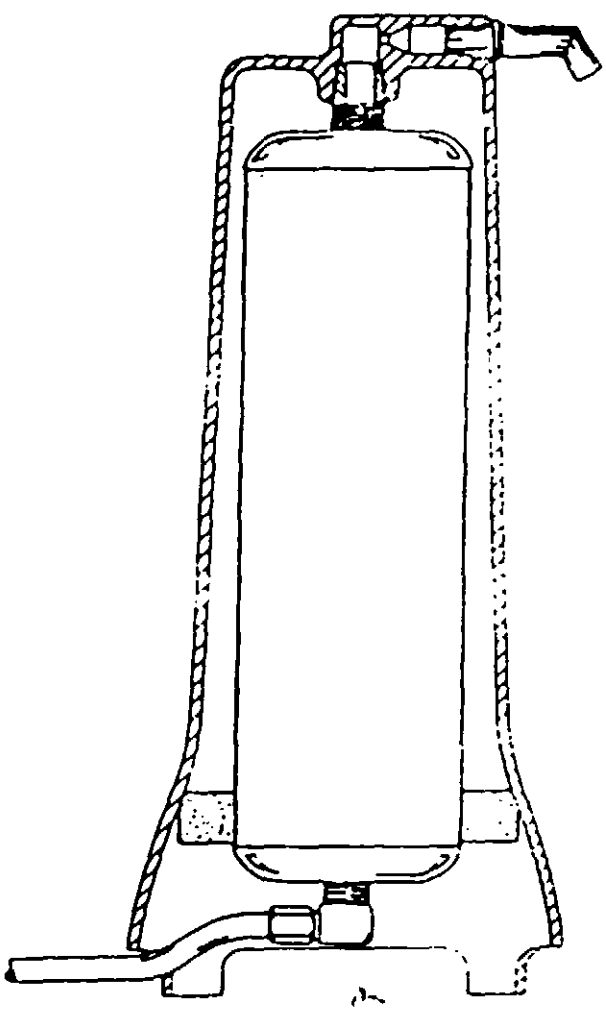

1. Unpack contents:
 - A. Bacteriostatic Counter Top Water Filter Unit.
 - B. Diverter valve assembly with plastic tubing.
2. Unscrew existing aerator from the faucet. With or without one of the 2 adapters provided, the diverter valve should fit the faucet spout; if not, visit local hardware store for the proper size adapters. If an adapter is used, be sure to use rubber washer between adapter and faucet spout.
3. To activate, turn on water, then pull button on diverter valve and allow water to flow for 10 gallons or 20 minutes. Do not drink this water, this is to remove the carbon fines from the unit.
4. For use on cold water only - municipally treated tap water.

OPERATION PROCEDURES:

Maximum Water Temperature: *100° F*
 Maximum Water Pressure: 125 p.s.i.
 Maximum Water Flow: 1 gallon per minute.

DISPOSAL: Wrap spent filter in newspaper and discard with trash.

This unit is composed of oligodynamic silver which has been combined with activated carbon through a complex manufacturing technique so that the filter media will provide bacteriostatic activity within the filter unit, making the effective life of the unit much longer than an ordinary carbon filter. This product has been tested in private laboratories and is designed to remove objectionable tastes, odors and color from municipally treated tap water.

ACCEPTED
with COMMENTS
In EPA Letter Dated:

APR 20 1990

BEST AVAILABLE COPY

Under the Federal Insecticide,
Fungicide, and Rodenticide Act
as amended, for the pesticide
registered under EPA Reg. No.
39446-3

APR 20 1990

PH 31

3946-3

Filtercold Corporation Inc
1840 East University Drive Suite 2
Tempe Arizona 85281

Attention: Allen Bernstein
President

Product Name: Microlene Bacteriostatic Water Filter Unit CTM Countertop
Model PC1-3
EPA Registration Number 39446-3
Submission Dated April 2, 1990

The amendment referred to above, submitted in connection with registration under FIFRA, is acceptable provided that you:

1. Make the labeling changes listed below before you release the product for shipment bearing the amended labeling:

- a. Place the signal word: "CAUTION" to appear directly below the "KEEP OUT OF REACH OF CHILDREN."

In addition delete the colon (:).

- b. Place the company name and company address directly on the label.

- c. Revise the word: "Contents" to read "Net contents."

- d. Clearly indicate that this unit has a useful life of three years depending upon daily usage.

- e. Add the heading: "Directions for Use" to the installation instruction Bulletin.

58268;I;V.G.;L-1;KENCO;4/18/90;5/17/90;dg

CONCURRENCES

SYMBOL							
SURNAME							
DATE							

19200

-2-


- f. Delete the word "Activated Carbon".
- g. Revise "Inert Ingredient" to "Inert Ingredients."
Add the letter "s".
- 2. Your release for shipment of the product bearing the amended labeling constitutes acceptance of these conditions.

A stamped copy of the labeling is enclosed for your records.

- 3. Note: As per conversation with the Agency, this label will supersede all previous labels. The 15,000 gallon label will replace the 2,000 gallons label.

If you have any questions concerning this letter, contact Valdis Goncarous at (703) 557-3663.

Sincerely yours,


John H. Lee
Product Manager (31)
Antimicrobial Program Branch
Registration Division (H7505C)

MICROLENE

BACTERIOSTATIC WATER

FILTER UNIT

CTN COUNTERTOP Model PC1-3

For home use; recommended location countertop.

ACTIVE INGREDIENT:

Metallic Silver 1.05%

INERT INGREDIENT:

Activated Carbon 98.95%

CAUTION: KEEP OUT OF REACH OF CHILDREN.

DISPOSAL: Wrap spent filter in newspaper and discard in trash.

For use on municipally treated tap water only. Install in cold water line only.

Maximum flow rate: 1.00 gallon per minute

Total gallonage: 15,000 gallons

This unit has a capacity of up to 15,000 gallons, and it is capable of treating an average of 8 gallons of cold tap water daily with a maximum flow rate of 1.00 gallon per minute at a maximum water pressure of 125 psi and a maximum temperature of 100 degrees F. Near the end of this period, a diminished flow will be noticed. This will indicate the unit is nearing the end of its useful life and should be replaced.

EPA Reg. No. 39446-3
EPA Est. No. 39446-AZ-01

See enclosed leaflet for directions and instructions.

Contents: One (1) Bacteriostatic water filter unit, model CTN.


ACCEPTED
with COMMENTS
in EPA Letter Date:
APR 20 1990

blank3.epa

Under the
Fungicide
as amended
registered
39446-3

INFORMATION & INSTALLATION INSTRUCTIONS
ON YOUR MICROLENE ^{Bacteriostatic} WATER FILTER UNIT MODEL PC1-3
CTA Countertop

**IT IS A VIOLATION OF FEDERAL LAW TO USE THIS
PRODUCT IN MANNER INCONSISTENT WITH ITS LABELING.**

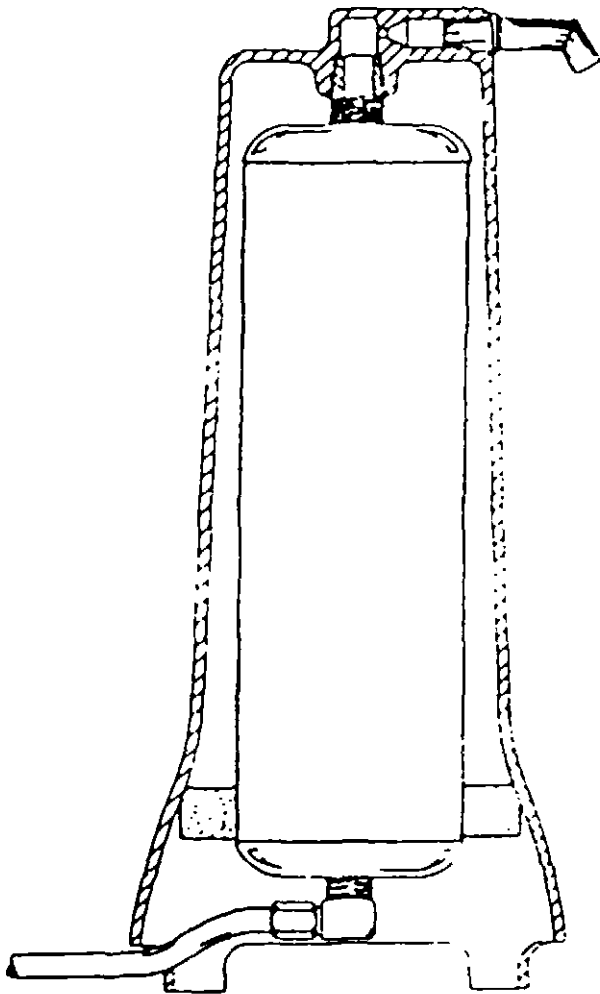

1. Unpack contents:
 - A. Bacteriostatic Counter Top Water Filter Unit.
 - B. Diverter valve assembly with plastic tubing.
2. Unscrew existing aerator from the faucet. With or without one of the 2 adapters provided, the diverter valve should fit the faucet spout; if not, visit local hardware store for the proper size adapters. If an adapter is used, be sure to use rubber washer between adapter and faucet spout.
3. To activate, turn on water, then pull button on diverter valve and allow water to flow for 10 gallons or 20 minutes. Do not drink this water, this is to remove the carbon fines from the unit.
4. For use on cold water only - municipally treated tap water.

OPERATION PROCEDURES:

Maximum Water Temperature: 100° F
Maximum Water Pressure: 125 p.s.i.
Maximum Water Flow: 1 gallon per minute.

DISPOSAL: Wrap spent filter in newspaper and discard with trash.

This unit is composed of oligodynamic silver which has been combined with activated carbon through a complex manufacturing technique so that the filter media will provide bacteriostatic activity within the filter unit, making the effective life of the unit much longer than an ordinary carbon filter. This product has been tested in private laboratories and is designed to remove objectionable tastes, odors and color from municipally treated tap water.

ACCEPTED
with COMMENTS
in EPA Letter Dated:

APR 20 1990

Under the Federal Insecticide,
Fungicide, and Rodenticide Act
as amended, for the pesticide
registered under EPA Reg. No.

39446-3

pg 2015

**INFORMATION & INSTALLATION INSTRUCTIONS
ON YOUR COUNTERTOP WATER FILTER UNIT**

MODEL CTN Model PC1-3

**IT IS A VIOLATION OF FEDERAL LAW
TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS
LABELING.**

DIRECTIONS:

- 1) Unpack contents:
 - a) Countertop water filter unit.
 - b) Diverter valve assembly with plastic tubing.

- 2) Unscrew existing aerator from the faucet. With or without the adapter provided, the diverter valve should fit the faucet spout; if not, visit a local hardware store for the proper size adapters. If an adapter is used, be sure to use the rubber washer between the adapter and the faucet spout.

- 3) To activate the water filtration unit, turn on the water, then pull the button on the diverter valve and allow the water to flow for 10 gallons or 20 minutes. Do not drink this water, as this is to remove the carbon fines from the unit.

- 4) For use on cold water only - municipally treated tap water.

OPERATION PROCEDURES:

Maximum Water Temperature: / 60 degrees F
 Maximum Water Pressure: 125 p.s.i.
 Maximum Water Flow: 1 gallon per minute

DISPOSAL: Wrap spent filter in newspaper and discard with trash.

ctn.ins

ACCEPTED
with COMMENTS
In EPA Letter Dated:

APR 20 1990

Under
Fungicide
as amend
registered
39446-3