

Reg no: 39446-7

PM-31


125

US ENVIRONMENTAL PROTECTION AGENCY OFFICE OF PESTICIDES PROGRAMS REGISTRATION DIVISION (75-767) WASHINGTON, DC 20460	EPA REGISTRATION NO. 39446-7	DATE OF ISSUANCE JUN 04 1990
	TERM OF ISSUANCE	
NOTICE OF PESTICIDE: <input checked="" type="checkbox"/> REGISTRATION <input type="checkbox"/> REREGRISTRATION <i>(Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended)</i>	NAME OF PESTICIDE PRODUCT Microline Pacifidostano 10.0% 1.1 L Unit 1.1 L Unit 1.1 L Unit 100% Pure	
NAME AND ADDRESS OF REGISTRANT (Include ZIP code)		
<p>NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.</p> <p>On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.</p> <p>A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.</p> <p>Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.</p>		
<input checked="" type="checkbox"/> ATTACHMENT IS APPLICABLE		
SIGNATURE OF APPROVING OFFICIAL		DATE

- e. Clearly indicate that this unit has a useful life of X years depending upon daily usage.
- f. Add the heading: "Directions for Use" to the installation instruction Bulletin.
- g. Delete the word "Activated Carbon".
- h. Revise "Inert Ingredient" to "Inert Ingredients." Add the letter "s".

3. If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.

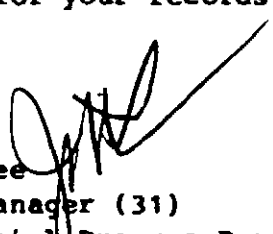
 John H. Lee
 Product Manager (31)
 Antimicrobial Program Branch
 Registration Division (H7505C)

Enclosure

**MICROLENE
BACTERIOSTATIC WATER
FILTER UNIT**

TF-1 INLINE UNDER COUNTER MODEL PC1-3A

For home use; recommended location inline undercounter.

ACTIVE INGREDIENT:
Metallic Silver 1.05%

INERT INGREDIENT:
Activated Carbon 98.95%

CAUTION: KEEP OUT OF REACH OF CHILDREN.

DISPOSAL: Wrap spent filter in newspaper and discard in trash.

For use on municipally treated tap water only. Install in cold water line only.

Maximum flow rate: 1.00 gallon per minute
Total gallonage: 2,500 gallons

This unit has a capacity of up to 2,500 gallons, and it is capable of treating an average of 8 gallons of cold tap water daily with a maximum flow rate of 1.00 gallon per minute at a maximum water pressure of 125 psi and a maximum temperature of 100 degrees F. Near the end of this period, a diminished flow will be noticed. This will indicate the unit is nearing the end of its useful life and should be replaced.

EPA Reg. No. 39446
EPA Est. No. 39446-AZ-01

See enclosed leaflet for directions and instructions.

Contents: One (1) Bacteriostatic water filter unit, model TF-1.

blank3.epa

ACCEPTED
with COMMENTS
in EPA Letter Dated:

JUN 04 1990

Under
Fungus
as anti
39446-7

INFORMATION & INSTALLATION INSTRUCTIONS
ON YOUR TF-1 INLINE UNDER COUNTER

Model PC1-3A

Microwave Bacteriostatic Water Filter Unit

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

DIRECTIONS:

- 1) Unpack contents:
 - a) Under counter water filter unit.
 - b) Installation hardware.
- 2) Follow enclosed installation instruction sheet.
- 3) For use on cold water only - municipally treated tap water.

OPERATION PROCEDURES:

Maximum Water Temperature: 100 degrees F
 Maximum Water Pressure: 125 p.s.i.
 Maximum Water Flow: 1.00 gallons per minute

DISPOSAL: Wrap spent filter in newspaper and discard with trash.

RECEIVED
MAY 28 1990
FBI - MEMPHIS

JUN 04 1990


39446-7

**INFORMATION AND INSTALLATION INSTRUCTIONS ON YOUR
MICROLENE BACTERIOSTATIC WATER FILTER UNIT**

TF-1 INLINE UNDER COUNTER Model PC1-3A

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

- 1) Unpack contents:
 - a) Microlene water filter unit Model TF-1 inline
 - b) 2 brass ferrules (N)
 - c) 2 brass nuts (G)
- 2) Turn off water supply.
- 3) Place unit on water supply line at most convenient location. This is done by cutting the water line (Note: use tubing cutter). Placing one end of tubing through brass nut (G), slide brass ferrule (N) over tubing. Place tubing in end of unit, holding firm. Secure nut on threaded end of unit.
- 4) Turn on water supply, allow to run 5 gallons of water.
- 5) Check both nuts (G) to make sure they are tight. This prevents any leaking.
- 6) Turn on the water supply. Check for leaks - tighten more if necessary.

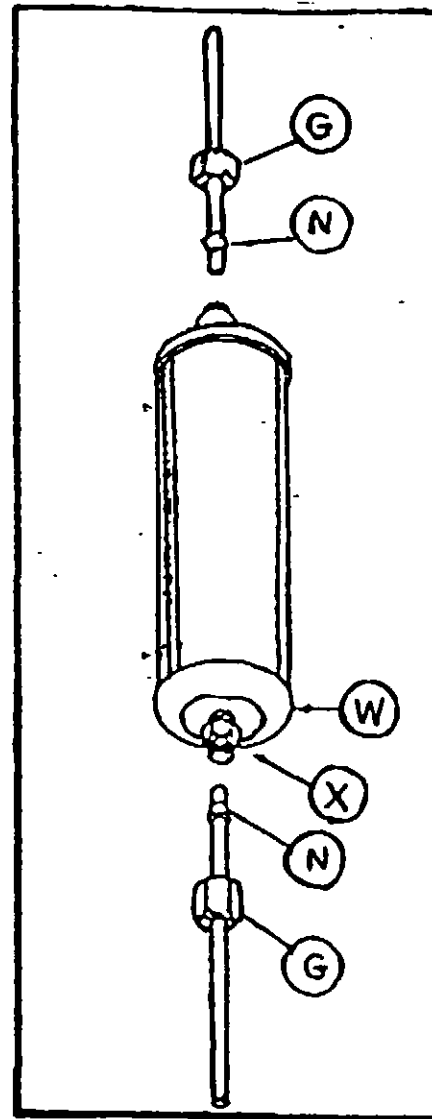

NOTE: To prevent over-tightening and damage to plastic end cap (W) on filter, place wrench on fitting (X) when tightening brass nut (G).

DISPOSAL: Wrap spent filter in newspaper and discard with trash.

This unit is composed of oligodynamic silver which has been combined with activated carbon through a complex manufacturing technique so that the filter media will provide bacteriostatic activity within the filter unit, making the effective life of the unit much longer than an ordinary carbon filter. This product has been tested in private laboratories and is designed to remove objectionable tastes, odors and color from municipally treated tap water.

ACCEPTED
with COMMENTS
In EPA Letter Dated:

JUN 04 1990

Unit
Type
Date
Product
39446-7