


ONE U.S. GALLON

NAVICOTE[®] ANTI-FOULING




KEEP OUT OF REACH OF CHILDREN
WARNING
SEE SIDE PANEL FOR PRECAUTIONARY STATEMENTS

ACTIVE INGREDIENTS
Cuprous Oxide . 37.29%*
INERT
INGREDIENTS . . 62.71%
100.00%

*Equivalent to 33.12%
Metallic Copper
CONTAINS
PETROLEUM DISTILLATES

ACCEPTED
JUL 26 1982
U.S. DEPARTMENT OF COMMERCE
MARINE COAST GUARD
AT WASHINGTON, D.C. 20540

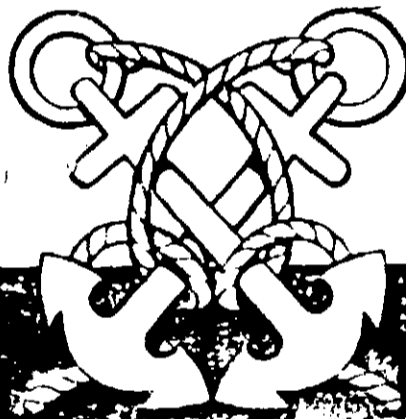

BEST DOCUMENT AVAILABLE

BEST DOCUMENT AVAILABLE

NAVICOTE 1000
GREEN ANTI-FOULING PAINT
MD-3558

E.P.A. REG. NO. 39492-25 E.P.A. EST. NO.

PRECAUTIONARY STATEMENTS
WARNING

HAZARD TO HUMANS AND DOMESTIC ANIMALS

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear a face shield and rubber gloves when handling. Use in a well ventilated area. Keep out of confined areas or apply by mechanical means. This product is jointly approved by the Mining Enforcement and Safety Administration (formerly the U.S. Bureau of Mines) and by the National Institute for Occupational Safety and Health under the provisions of 30 CFR 11. May be fatal if swallowed or inhaled. Do not breathe vapors or dusts.

PRACTICAL TREATMENT

In case of skin contact, remove contaminated clothing and immediately wash skin with soap and water. Get medical attention. Wash contaminated clothing before reuse. If inhaled, remove to fresh air. Use artificial respiration if breathing has stopped. Get medical attention. If swallowed, do not induce vomiting. This product contains petroleum distillates. Get medical attention. If in eyes, immediately flush with plenty of water. Get medical attention.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

CHEMICAL AND PHYSICAL HAZARDS

Do not use or store near heat or open flame.

NAVICOTE 1000 ANTI-FOULING PAINT

Directions for Use

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Navicote Anti-Fouling Paint is for application to the underwater areas of fiberglass, wood, aluminum and steel vessels subject to fouling by barnacles, algae, tube worms and other fouling organisms. When boat is hauled, remove any fouling and all loose, old paint with a scraper or wire brush. When sanding, do not breathe dust - wear a dust mask. Scrub hull with a stiff fiber brush and wash down with fresh water. All surfaces must be free of marine growth, loose old paint, moisture, grease, oil or dirt before paint is applied. Mix paint thoroughly before using and stir from time to time during application. Apply one or two coats allowing four hours dry time between coats. Paint is furnished at brushing viscosity and should not be thinned for brush or roller application. For spraying, thin, if necessary, up to 5% with #1 solvent, #1-115. Do not add oil or varnishes to this paint. Wear appropriate NIOSH approved respirators during spray application. Protective clothing, rubber gloves and goggles should be worn during application. Contaminated clothing should be laundered before reuse. Clean up with #1 solvent, #1-115. Labeling may be accomplished as soon as coating is dry, or later if desired.

FIBERGLASS HULLS

Primer surface and apply two coats Navicote Anti-Fouling Paint as above. Gelcoat should be weathered one full season before first painting.

WOOD HULLS

Clean and sand thoroughly and apply two coats Navicote Anti-Fouling Paint as above. Check water after caulking filling of seams and thorough sanding, apply two coats, entering the first coat approximately 5% for good penetration.

STEEL AND ALUMINUM HULLS

Do not apply to galvanized surfaces. A suitable barrier coat must be applied prior to application of anti-fouling paint. When repainting an existing system to wood or steel, clean thoroughly, sand lightly, and fill up any bare spots with anti-corrosive. Apply two coats Navicote Anti-Fouling Paint as above.

STORAGE AND DISPOSAL

Do not store in unventilated or feed by storage or disposal. Residual paint or anti-fouling paint or residue that cannot be used according to label directions must be disposed of according to Federal, State or local procedures under the Resource Conservation and Recovery Act. (Residue disposal - triple rinse for equivalent) and dispose of in a sanitary landfill or to approved water treatment and local authorities.

DEVOE MARINE COATINGS CO.

Louisville Ky 40207

Division of GROW GROUP, INC.

MADE IN U.S.A.

AVAILABLE

