

Precautionary Statements

DANGER

Hazard to Humans and Domestic Animals

Corrosive. Causes skin burns and eye irritation. Harmful if absorbed through skin or inhaled. Do not get on skin, clothing or in eyes. May be a dermal sensitizer. Wear a face shield and rubber gloves when handling. Wear protective clothing, such as long sleeved cotton shirt, long pants and hat. Use in a well ventilated area. When used in confined areas or applied by spraying, wear protective clothing and a pesticide respirator jointly approved by the Mining Enforcement and Safety Administration (formerly the U.S. Bureau of Mines) and by the National Institute for Occupational Safety and Health under the provisions of 30 CFR 11. May be fatal if swallowed. If swallowed, promptly drink a large quantity of egg whites, gelatin solution or water. Avoid alcohol. Do not induce vomiting. Do not breathe vapors or spray mist.

Practical Treatment

In case of skin contact, remove contaminated clothing and immediately wash skin with soap and water. Get medical attention. Wash contaminated clothing before reuse. If inhaled, remove to fresh air. Use artificial respiration if breathing has stopped. Get medical attention. If swallowed, do not induce vomiting. This product contains petroleum distillates. Get medical attention. If in eyes, immediately flush with plenty of water. Get medical attention.

Environmental Hazards


This pesticide is toxic to aquatic organisms including fish and shellfish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

Chemical and Physical Hazards

Do not use or store near heat or open flame.

MAF 4754

For Use in Commercial Shipyards Only

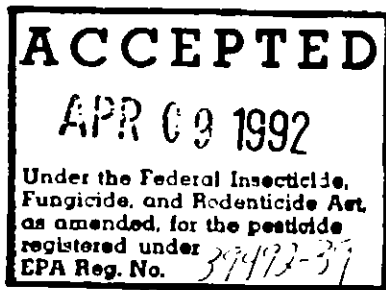

DEVOLVE

COATINGS

Marine · Industrial · Offshore

Restricted Use Pesticide—Due to toxicity to Aquatic Organisms including shellfish: For sale only to certified commercial applicators and for use only by certified commercial applicators or by persons under the direct supervision of an on-site (at the work site) certified commercial applicator.

282-S-4754

ABC® #2 Red

Ablative Antifouling Coating

Keep Out Of Reach Of Children

DANGER

See side panel for precautionary statements

VOC — 415 GPL

Do not thin inconsistent with local VOC regulations

PAINT UN1263 5 U.S. Gallons (18.925 Liters)

EPA Reg. No. 39492-39

EPA Est. Nos. 39492-NJ-1
39492-CA-1

Active Ingredients*

Cuprous Oxide 37.92%

Bis(tributyltin) Oxide 2.21%

Inert Ingredients 59.87%

100.00%

*Equivalent to 33.6% Metallic Copper and 0.88% Metallic Tin

Contains
Petroleum Distillates