

DEVDOE

MARINE

PAINTS & COATINGS • WORLD-WIDE

DEVTRAN® FORMULA 222HS

ALLSEAS® PERMANENT RED ANTI-FOULING PAINT

MD-4313

**KEEP OUT OF REACH OF CHILDREN
DANGER**

SEE SIDE PANEL FOR PRECAUTIONARY STATEMENTS

EPA REG. NO. 39492-43
EPA EST. NO.

ACTIVE INGREDIENTS*

Cuprous Oxide 44.46%

Bis (Tributyltin) Oxide 2.47%

INERT INGREDIENTS . . 53.07%

100.00%

*Equivalent to 39.4% Metallic
Copper and 0.24% Metallic Tin

BATCH NO.

Directions for Use

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Devtran Anti-Fouling Paint

— for application to underwater areas of steel, aluminum, fiberglass or wood vessels subject to fouling by barnacles, algae, tube worms and other fouling organisms. Surface to be coated should be clean of grease, oil, dirt and moisture. Do not apply directly to metal surfaces. A suitable barrier coat should be applied to steel and aluminum surfaces; a primer is recommended for fiberglass and wood surfaces. Apply by spray, brush or roller. For spray, airless spray is strongly recommended. When spraying, applicators must use appropriate NIOSH approved respirators. Protective clothing, rubber gloves and goggles should be worn by applicators. Contaminated clothing should be laundered before reuse. Clean up with #1 Solvent, MD-113. Launching may be accomplished as soon as coating is dry, or later if desired.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

Pesticide Disposal — Pesticide, paint or rinsate that cannot be used according to label directions must be disposed of according to Federal, State or local procedures under the Resource Conservation and Recovery Act.

Container Disposal — Triple rinse (or equivalent) and offer for recycling or reconditioning, or dispose of in a sanitary landfill, or by other approved State and local procedures.

**FOR USE IN COMMERCIAL
SHIPYARDS ONLY**

DEVDOE MARINE COATINGS CO.

Division of GROW GROUP INC.

Louisville, Ky 40207

MADE IN U S A

ACCEPTED

MAY 26 1962

Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, for the pesticide registered under EPA Reg. No. 39492-43

**5 U. S. GALLONS
(18.925 LITERS)**

DEVOR

MARINE

PAINTS & COATINGS • WORLD-WIDE

DEVORAN® FORMULA 222HS

ALLSEAS® PERMANENT RED ANTI-FOULING PAINT

MD-4313

ACCEPTED

JUL 26 1962

Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, for the pesticide registered under EPA Reg. No. 27492-43

**KEEP OUT OF REACH OF CHILDREN
DANGER**

SEE SIDE PANEL FOR PRECAUTIONARY STATEMENTS

**5 U. S. GALLONS
(18.925 LITERS)**

EPA REG. NO. 39492-43
EPA EST. NO.

ACTIVE INGREDIENTS*

Cuprous Oxide 44.46%
Bis (Tributyltin) Oxide 2.47%
INERT INGREDIENTS . . 53.07%
100.00%

*Equivalent to 39.4% Metallic Copper and 0.24% Metallic Tin

BATCH NO.

DEVOR

MARINE

PAINTS & COATINGS • WORLD-WIDE

DEVORAN[®] FORMULA 222 HS

ALLSEAS[®] PERMANENT RED ANTI-FOULING PAINT

MD-4313

KEEP OUT OF REACH OF CHILDREN
DANGER

SEE SIDE PANEL FOR PRECAUTIONARY STATEMENTS

EPA REG. NO. 39492-4 J
EPA EST. NO.

ACTIVE INGREDIENTS*	
Cuprous Oxide	44.46%
Bis (Tributyltin) Oxide	0.24%
INERT INGREDIENTS .. 53.07%	
100.00%	

*Equivalent to 39.4% Metallic Copper and 0.24% Metallic Tin

BATCH NO.

ACCEPTED
MUL 26 1982

Under the Federal Insecticide, Fungicide and Herbicide Act, as amended, this pesticide is registered under EPA Reg. No. 39492-43

5 U. S. GALLONS
(18.925 LITERS)

Direct

It is a violation of law to use this product in a manner not indicated on its label.

Devoran Formula 222 HS is for use on

areas of steel, aluminum, or wood vessels, hulls, and barnacles, and other fouling organisms. Surfaces to be coated should be free of oil, dirt and other contaminants. Apply directly to the surface. A barrier coating of Devoran Formula 222 HS on steel and aluminum is recommended. Devoran Formula 222 HS can be brushed or sprayed. When spraying, use appropriate safety precautions. Protect eyes and skin by wearing gloves and clothing. Do not reuse. Clean spray gun thoroughly after use.

STORAGE

Do not store in areas accessible to children.

Pesticide containers should be disposed of according to the instructions on the label. State or local laws may apply. See Resource Conservation and Recovery Act.

Container disposal instructions are equivalent to those for the pesticide. For more information, contact your state and local health department.

FOR USE

DEVORAN

Division of
Louisville, Ky.

PRECAUTIONARY STATEMENTS

DANGER

HAZARD TO HUMANS AND DOMESTIC ANIMALS

Corrosive. Causes skin burns and eye irritation. Harmful if absorbed through skin or inhaled. Do not get on skin, clothing or in eyes. May be a dermal sensitizer. Wear a face shield and rubber gloves when handling. Use in a well ventilated area. When used on confined areas or as fumes by spraying, wear protective clothing, and a positive respirator, recently approved by the Mine Safety and Health Administration, or only the U.S. Army, or MSHA, and by the National Institute for Occupational Safety and Health under the provisions of 29 CFR 11. May be fatal if swallowed. Do not breathe vapor or spray mist.

PRACTICAL TREATMENT

In case of skin contact, remove contaminated clothing and immediately wash skin with soap and water. Get medical attention. Wash contaminated clothing before reuse. If swallowed, promptly drink a large quantity of milk or water. Do not induce vomiting. Get medical attention. In case of eye contact, flush immediately with copious amounts of water for at least 15 minutes. If contact with eyes occurs, get medical attention. If inhaled, remove to fresh air. Get medical attention. If breathing apparatus is used, use of water-soluble liquid soaps or detergents is permitted. If respiratory irritation of breathing has occurred, get medical attention.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

CHEMICAL AND PHYSICAL

Do not use or store near heat or open flame.

DEVVOE

MARINE

PAINTS & COATINGS • WORLD-WIDE

DEVVANSM FORMULA 222 HS

ALLSEASSM PERMANENT RED ANTI-FOULING PAINT

MD-4313

KEEP OUT OF REACH OF CHILDREN

DANGER

SEE SIDE PANEL FOR PRECAUTIONARY STATEMENTS


5 U. S. GALLONS
(18.925 LITERS)

EPA REG. NO. 39492-43,
EPA EST. NO.

ACTIVE INGREDIENTS:
Cuprous Oxide 44.46%
Bis (Tributyltin) Oxide 2.47%
INERT INGREDIENTS 53.07%

*Equivalent to 39.4% Metallic Copper and 0.24% Metallic Tin

BATCH NO.

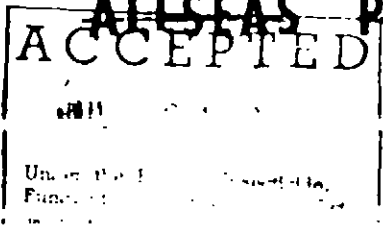

EPA Reg. No. 39492-43