

2068

FRONT PANEL

DEVOE®
ALL-WEATHER™
PENETRATING CLEAR
WOOD PRESERVATIVE FINISH

- Repels Water

KEEP OUT OF REACH OF CHILDREN
WARNING!

COMBUSTIBLE. HARMFUL IF INHALED.
HARMFUL IF SWALLOWED.

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY
STATEMENTS.

EPA Reg. No. 39492-

EPA Est. No. 39492-

ACTIVE INGREDIENT

3-Iodo-2-Propynyl Butyl
Carbamate----- 0.8%

INERT INGREDIENTS----99.2%
TOTAL-----100.0%

1 GALLON

9500-01 CLEAR

3.785 LITERS

Net Weight 7.40 lbs.

ACCEPTED
with COMMENTS
EPA Letter Dated:

FEB 2 1987

Under the Federal Insecticide,
Fungicide, and Rodenticide Act
as amended, for the pesticide
registered under EPA Reg. No.

39492-47


SIDE PANEL - #1

- REPELS WATER -

Meets Federal Specification

TT-W-572B, Paragraph 3.7 for Water Repellency

- PROTECTS AGAINST MILDEW & ROT
- HIGHLIGHTS WOOD'S NATURAL BEAUTY
- WON'T CRACK, PEEL OR BLISTER

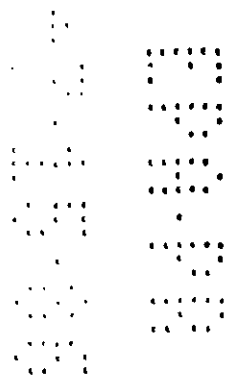

SIDE PANEL - #2

FOR EXTERIOR USE ON:

- WOOD DECKS & FENCES
- WOOD SIDING
- WOOD SHINGLES & SHAKES
- ROUGH SAWN LUMBER
- OLD WEATHERED WOOD
- NEW POROUS WOODS

BACK PANEL - COLUMN #1

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

ALL WEATHER™ Clear Wood Preservative Finish is a transparent, water repellent exterior finish that highlights the beauty of wood's natural grain and texture without adding color. Water beads up and runs off its superior deep penetrating water repellent finish before it can do damage. Its wood preserving formula helps protect wood from rot, decay and mildew. Won't crack, peel or blister. Exceeds the Federal Specification TT-W-572B, Paragraph 3.7 for water repellency.

° USES: ALL-WEATHER Clear Wood Preservative Finish is recommended for above ground use on exterior bare wood shingles, shakes, beams, timbers, clapboards, smooth or rough-sawn wood siding, wood fences, decks, old weathered wood or any other porous exterior wood surface. Not recommended for interior use, hardboard surfaces or where any portion of the treated wood will be below ground.

° GENERAL SURFACE PREPARATION: All wood surfaces must be clean, sound, dry and free of dirt, dust, oil, soot or other foreign matter. Remove mildew by washing with 16 oz. liquid household bleach and 2 oz. non-ammoniated liquid detergent per gallon of water. Rinse well and let dry.

° TINTING: Not recommended.

° SPREADING RATE: Apply at 150 to 300 sq. ft. per gallon, depending on surface condition and wood porosity.

° APPLICATION: Mix well before use and stir frequently while using. Do not thin. Apply with a natural bristle brush for best results. Can also be sprayed using a low pressure, coarse spray. Roll application should be limited to rough surfaces using a long nap roller. One coat is sufficient. Can be applied over a penetrating semi-transparent stain (non-film forming) if desired. Cut and machine wood prior to treatment, if possible. If not, liberally apply two coats of preservative to all joints, cracks, cut-ends, holes or other openings. Do not apply to primed, previously painted or other sealed surfaces. Product must soak into the wood to be effective. Test a small area. If it soaks in, product can be applied.

° DRYING TIME: At 77°F and 50% R.H. dries to touch in four hours. Low temperature or high humidity increases this time.

° RECOATABILITY: If a stain topcoat is desired, allow to dry overnight before application. ALL WEATHER Alkyd Stains can be used. If a latex stain or paint is desired, apply ALL WEATHER Alkyd Primer first or allow to weather at least 6 months. The strong water repellency properties of this product may impair topcoat (particularly latex type) adhesion. Adhesion should be tested first.

ONE GALLON SIZE LABEL

BACK PANEL - COLUMN #1 (Cont'd)

° IMPORTANT: Apply when product, surface and air temperatures are above 50°F. Do not use this product indoors - for exterior use only. Woods treated with this product will resist moisture damage, mildew and rot, but will still weather naturally. Depending on the type of wood and amount of exposure, this weathering will produce contrasting wood tones and a gradual graying process. Maximum performance and service life is obtained over porous wood surfaces where maximum penetration occurs. Reapplication is recommended as soon as areas of wood erosion are evident. Do not use on wood that will be in contact with food, feed, potable water, or in areas where prolonged skin contact is likely. Cover desirable plants and shrubs to protect against possible injury.

° CLEANUP: Use mineral spirits


° NOTE: No person is authorized to vary or extend the representations stated on this label except in a writing signed by an authorized officer of Devoe & Raynolds Co. in Louisville, Kentucky.



DEVOE & RAYNOLDS CO.
4000 Dupont Circle
Louisville, Kentucky 40207
(502) 897-9861 Made in USA

Division of Grow Group, Inc.

Copyright© 1986 Devoe & Raynolds Co.

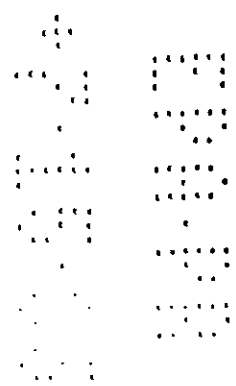

ONE GALLON SIZE LABEL

BACK PANEL - COLUMN #2

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING! COMBUSTIBLE. HARMFUL IF INHALED.

HARMFUL IF SWALLOWED. CONTAINS PETROLEUM DISTILLATE.

Keep away from heat and flame. Do not smoke. Prevent build-up of vapors by maintaining continuous flow of fresh air.

Do not breathe vapors, spray mists or sanding dusts. If indoors, open windows and doors to ensure continuous flow of fresh air during application and drying. Causes substantial but temporary eye injury. If you experience eye watering, headaches or dizziness, increase fresh air or wear respiratory protection (NIOSH/MSHA TC23C or equivalent), or leave the area. Follow the respirator manufacturer's directions for respirator use. Do not get in eyes, on skin or on clothing. Use solvent resistant safety eyewear with splash guards. Use solvent impermeable gloves, clothing and boots to prevent skin contact when handling this product and/or freshly treated lumber.

STATEMENT OF PRACTICAL TREATMENT

IF INHALED: If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, summon medical assistance immediately. If breathing ceases, restore using approved CPR techniques and summon medical assistance immediately.

IF IN EYES: In case of eye contact, flush with large amounts of water for at least 15 minutes. Get medical assistance.

IF ON SKIN: In case of skin contact, wash thoroughly with soap and water. Remove contaminated clothing and wash before reuse. Get medical assistance if irritation persists.

IF SWALLOWED: Do not induce vomiting. Get medical assistance.

° ENVIRONMENTAL HAZARDS: This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes.

ONE GALLON SIZE LABEL

BACK PANEL - #2 (Cont'd)

° PHYSICAL OR CHEMICAL HAZARDS: COMBUSTIBLE: Do not use, pour, or spill near heat or flame. In case of fire, use CO₂, Dry Chemical, Foam or other approved method for treating a Class B Fire. Do not use water. Summon professional firefighters.

STORAGE AND DISPOSAL

° STORAGE: Keep container closed when not in use. Do not store above 120°F. Do not transfer contents for storage to any unlabeled containers. In case of spillage, absorb with inert material.

° DISPOSAL: Do not reuse container. Securely wrap original container in several layers of newspaper and dispose of in trash. Contaminated absorbent and any unused contents should be disposed of in accordance with local, state and federal regulations.

° WARNING! Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents may be harmful or fatal.

