

Final REG# 39492-51
 PSE

US ENVIRONMENTAL PROTECTION AGENCY OFFICE OF PESTICIDES PROGRAMS REGISTRATION DIVISION (TS 767) WASHINGTON, DC 20460	EPA REGISTRATION NO. 39492-51	DATE OF ISSUANCE SEP 17 1981
	TERM OF ISSUANCE NAME OF PESTICIDE PRODUCT ... WEATHER -50	

NOTICE OF PESTICIDE: REGISTRATION REREГИSTRATION
(Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended)

NAME AND ADDRESS OF REGISTRANT (Include ZIP code)

198844 / 161 / 18

... Group, Inc.

NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EP registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.

A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.

Registration is in no way to be construed as an endorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA section 3(c)(7)(A) provided that you:

- Submit/site all data required for registration/reregistration of your product under FIFRA section 3(c)(5) when the Agency requires all registrants of similar products to submit such data.
- Make the labeling changes listed below before you release the product for shipment:
 - Add the phrase "EPA Registration No. 39492-51."
 - Under the Statements of Practical Treatment, replace the former text under "Eyes" and "Ingestion" with the following statements:

IF IN EYES: Flush with plenty of water. Call a physician.

IF SWALLOWED: Promptly drink a large quantity of milk, egg whites, gelatin solution, or if these are not available, drink large quantities of water. Call a physician.

ATTACHMENT IS APPLICABLE

SIGNATURE OF APPROVING OFFICIAL _____ DATE _____

2/9

3. Submit five copies (5) of your final printed labeling before you release the product for shipment. Refer to the A-79 enclosure for a further description of final printed labeling.

Lois A. Rossi
Product Manager 21
Fungicide/Herbicide Branch
Registration Division (TS-767C)

Enclosures

FRONT PANEL

DEVOE®
ALL-WEATHER™
WEATHERING STAIN

- Repels Water
- Preserves Wood

KEEP OUT OF REACH OF CHILDREN
 WARNING!
 COMBUSTIBLE. HARMFUL IF INHALED.
 HARMFUL IF SWALLOWED.
 SEE BACK PANEL FOR ADDITIONAL
 PRECAUTIONARY STATEMENTS

ACTIVE INGREDIENTS

Bis(tri-n-butyltin)oxide----- 0.5%
 Folpet[N-(trichloromethylthio)
 phthalimide]----- 0.7%

INERT INGREDIENTS----- 98.8%

TOTAL-----100.0%

EPA Reg. No. 39492

EPA Est. No. 39492

1 GALLON


9719-01 WEATHERING GRAY

3.785 LITERS

ACCEPTED
 ALL COMMENTS
 in EPA Letter 11/86

SEP 17 1987

Under the Federal Insecticide,
 Fungicide, and Rodenticide Act
 as amended, this pesticide
 registered under EPA Reg. No.
39492-51

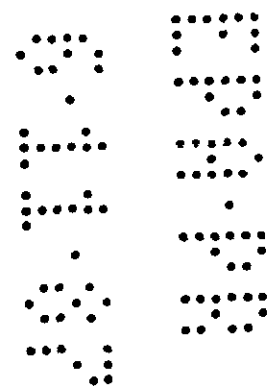


SIDE PANEL - #1

- REPELS WATER -

Meets Federal Specification

TT-W-572B, Paragraph 3.7 for Water Repellency


- PROTECTS AGAINST MILDEW & ROT
- HIGHLIGHTS WOOD'S NATURAL GRAIN & TEXTURE
- WON'T CRACK, PEEL OR BLISTER

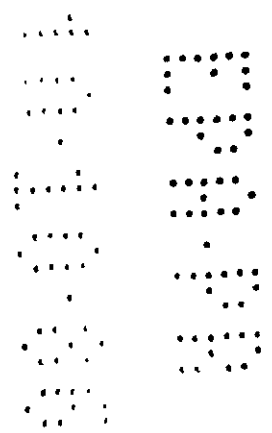

SIDE PANEL - #2

FOR EXTERIOR USE ON:

- WOOD DECKS & FENCES
- WOOD SIDING
- WOOD SHINGLES & SHAKES
- ROUGH SAWN LUMBER
- OLD WEATHERED WOOD
- NEW POROUS WOODS

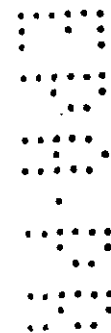

ONE GALLON SIZE LABELBACK PANEL - COLUMN #1

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER WHICH IS INCONSISTENT WITH ITS LABELING.

ALL-WEATHER™ Weathering Stain & Wood Preservative is a deep penetrating alkyd-oil exterior stain that highlights the beauty of wood's natural grain and texture. Its beautiful driftwood gray appearance provides a natural weathered effect which would require many years of actual weathering. Water beads up and runs off its durable water repellent finish. Its wood preserving formula helps protect wood from rot, decay, and mildew. Won't crack, peel or blister. Exceeds the Federal Specification TT-W-572B, Paragraph 3.7, for water repellency.

° USES: ALL-WEATHER Weathering Stain is recommended for exterior horizontal and vertical wood siding, clapboards, shingles, shakes, beams, fences, rough sawn lumber, or any other porous wood surface. Its tough alkyd binder provides a durable finish for all types of exterior wood decking, floors, porches and patios (use one coat only on these surfaces and brushed or abraded plywood). Not recommended for interior use, hardboard surfaces, or over any previously painted, sealed or nonporous surfaces.

° GENERAL SURFACE PREPARATION: All wood surfaces must be clean, sound, dry and free of dirt, dust, oil, soot or other foreign matter. Remove mildew by washing with 16 oz. liquid household bleach and 2 oz. non-ammoniated liquid detergent per gallon of water. Rinse well and let dry completely before staining. Remove grade stamps or pencil marks by light sanding. Weather new, unseasoned wood that is shiny 3 to 6 months before staining.

° SPREADING RATE: Apply at 250 to 350 sq. ft. per gallon on smooth wood surfaces and at 150-250 sq. ft. per gallon on rougher wood surfaces.

° APPLICATION: Mix thoroughly and STIR FREQUENTLY WHILE USING. Do not thin. Apply by brush, roller, spray, or by dipping. Roll application should be limited to rough wood surfaces. Always keep a wet edge to avoid lap marks. When using more than one container, follow this painting tip to insure color uniformity: when three quarters of can is used, refill from the next thoroughly mixed can. One coat is normally sufficient. Apply a second coat when more color depth is desired.

° DRYING TIME: At 77°F & 50% R.H. dries to recoat in 24 hours. Low temperature or high humidity will increase this time.

BACK PANEL - COLUMN #1 (Cont'd)

° **RECOATABILITY:** If a stain topcoat is desired, allow to dry overnight before application. ALL-WEATHER Alkyd Stains can be used. If recoating with a semi-transparent stain, the color being applied must be the same or darker than the color being recoated. If a latex stain or paint topcoat is desired, apply ALL-WEATHER Alkyd Primer first or allow to weather at least 6 months. The strong water repellency properties of this product may impair topcoat (particularly latex type) adhesion. Adhesion should be tested first.

° **EXTRACTIVE BLEEDING:** Many types of wood (redwood, red cedar, mahogany and Douglas fir) contain a water-soluble material which tends to migrate to the surface and discolor the stain. The discoloration is not harmful to the stain and can usually be removed with a mild detergent wash.

IMPORTANT: Avoid applying when product, surface and air temperature are below 50°F. Do not use on wood that will be in contact with food, feed, potable water, or in areas where prolonged skin contact is likely. Cover desirable plants and shrubs to protect against possible injury. Do not use as a below grade preservative.

° **CLEANUP:** Use Mineral Spirits.

° **NOTE:** No person is authorized to vary or extenu the representations stated on this label except in a writing signed by an authorized officer of Devoe & Reynolds Co. in Louisville, Kentucky.



Devoe & Reynolds Co.
4000 Dupont Circle
Louisville, Kentucky 40207
(502) 897-9861

Divison of Grow Group, Inc.

Copyright © 1986 Devoe & Reynolds Co.

9719

ONE GALLON SIZE LABEL

BACK PANEL - COLUMN #2

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING! COMBUSTIBLE. HARMFUL IF INHALED.

HARMFUL IF SWALLOWED. CONTAINS PETROLEUM DISTILLATE.

Keep away from heat and flame. Do not smoke. Prevent build-up of vapors by maintaining continuous flow of fresh air.

Do not breathe vapors, spray mists or sanding dusts. If indoors, open windows and doors to ensure continuous flow of fresh air during application and drying. Causes substantial but temporary eye injury. If you experience eye watering, headaches or dizziness, increase fresh air or wear respiratory protection (NIOSH/MSHA TC23C or equivalent), or leave the area. Follow the respirator manufacturer's directions for respirator use. Do not get in eyes, on skin or on clothing. Use solvent resistant safety eyewear with splash guards. Use solvent impermeable gloves, clothing and boots to prevent skin contact when handling this product and/or freshly treated lumber.

STATEMENT OF PRACTICAL TREATMENT

IF INHALED: If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, summon medical assistance immediately. If breathing ceases, restore using approved CPR techniques and summon medical assistance immediately.

IF IN EYES: In case of eye contact, flush with large amounts of water for at least 15 minutes. Get medical assistance.

IF ON SKIN: In case of skin contact, wash thoroughly with soap and water. Remove contaminated clothing and wash before reuse. Get medical assistance if irritation persists.

IF SWALLOWED: Do not induce vomiting. Get medical assistance.

* ENVIRONMENTAL HAZARDS: This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes.

ONE GALLON SIZE LABEL

BACK PANEL - COLUMN #2 (Cont'd)

° **PHYSICAL OR CHEMICAL HAZARDS: COMBUSTIBLE:** Do not use, pour, or spill near heat or flame. In case of fire, use CO₂, Dry Chemical, Foam or other approved method for treating a Class B Fire. Do not use water. Summon professional firefighters.

STORAGE AND DISPOSAL

° **STORAGE:** Keep container closed when not in use. Do not store above 120°F. Do not transfer contents for storage to any unlabeled containers. In case of spillage, absorb with inert material.

° **DISPOSAL:** Do not reuse container. Securely wrap original container in several layers of newspaper and dispose of in trash. Contaminated absorbent and any unused contents should be disposed of in accordance with local, state and federal regulations.

° **WARNING!** Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents may be harmful or fatal.

