

Preventol[®] CMK-Na Preservative Solution

INDUSTRIAL MICROBIOCIDES: FOR USE AS A PRESERVATIVE IN THE MANUFACTURE OF ADHESIVES AND GLUES, POLYMER DISPERSIONS AND EMULSIONS, LEATHER INDUSTRY (FOR THE PROTECTION OF CHROME OR VEGETABLE TANNED LEATHER), LUBRICOLANT AND MINERAL OIL-BASED PRODUCTS, MATERIALS IN THE PRINTING INDUSTRY, BUILDING MATERIALS SUCH AS JOINT CEMENTS AND CONCRETE ADDITIVES, MATERIALS IN THE OIL INDUSTRY, PIGMENT SLURRIES, MATERIALS IN THE TEXTILE INDUSTRY, PAPER, POLISHES, WAXES, PROTEIN SOLUTIONS, CERAMIC GLAZES, FIRE EXTINGUISHING MATERIALS, CLEANING SOLUTIONS, AND DETERGENTS.

ACTIVE INGREDIENT: Sodium *p*-chloro-*m*-cresolate _____ 34.5%
INERT INGREDIENTS _____ 65.5%
TOTAL _____ 100.0%

DANGER! KEEP OUT OF REACH OF CHILDREN

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER! CORROSIVE: Causes irreversible eye damage and skin burns. Harmful if swallowed or absorbed through the skin. Do not get in eyes, on skin or on clothing. Wear goggles or face shield (safety glasses), protective clothing and rubber gloves. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse. Prolonged or frequently repeated skin contact may cause an allergic reaction in some individuals.

FIRST AID

IF SWALLOWED: Call a poison control center or doctor immediately for treatment advice. Have person sip a glass of water if able to swallow. Do not induce vomiting unless told to do so by the poison control center or doctor. Do not give anything by mouth to an unconscious person.

IF ON SKIN OR CLOTHING: Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.

IF IN EYES: Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. Call a poison control center or doctor for treatment advice.

Have the product container or label with you when calling a poison control center or doctor or when going for treatment.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage.

The LANXESS Pittsburgh Emergency Response Telephone Number is 800-410-3063

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans, or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product into sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

IN CASE OF EMERGENCY, CALL: CHEMTREC 800-424-9300

EPA REGISTRATION NUMBER: 39967-27

EPA ESTABLISHMENT NUMBER: 39967-

LANXESS

LANXESS Corporation

111 RIDC Park West Drive • Pittsburgh, PA 15275-1112

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Detailed information on physical and chemical properties and other detailed directions for use can be found in the Preventol CMK-Na Preservative Solution Technical Information Sheet. Obtain and read this information before undertaking the use of Preventol CMK-Na Preservative Solution in order to avoid process mistakes.

USER SAFETY REQUIREMENTS

For worker protection during mixing, loading and during application, wear a hat, long sleeved shirt, and long legged trousers or overalls. In addition, during mixing and loading, wear rubber or neoprene gloves and protective goggles. Follow manufacturers' instructions for cleaning/maintaining PPE. If no such instructions for washables, use detergent and hot water. Keep and wash PPE separately from other laundry.

USER SAFETY RECOMMENDATIONS

Users must wash hands before eating, drinking, chewing gum, using tobacco, or using the toilet. Users must remove clothing immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing. User must remove PPE immediately after handling this product. Wash the outside of gloves before removing. As soon as possible, wash thoroughly and change into clean clothing.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

Protect products from exposure to light and moisture.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to the label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning or puncture and dispose of in a sanitary landfill, by incineration or, if allowed by State and Local authorities, by burning. If burned, stay out of smoke.

Handle and open container in a manner as to prevent spillage. If the container is leaking, invert to prevent leakage. If the container is leaking or material is spilled for any reason or cause, carefully dam up spilled material to prevent runoff. Refer to Precautionary Statements on label for hazards associated with the handling of this material. Do not walk through spilled material. Absorb spilled material with absorbing type compounds and dispose of as directed above.


DISCLAIMER: Seller (whether manufacturer, distributor, or other) makes no warranty, express or implied, including the implied warranty of merchantability, regarding this product except the composition as set forth in the registration statement label, and shall not be liable for special or consequential damages, the exclusive remedy being the replacement of the product. Buyer or user assumes all risk of possession, handling or use of this material when such use and/or handling is contrary to label instructions.

* Preventol is a registered trademark of LANXESS Corporation

INTERNATIONAL 703-527-3887

Net Contents: Pounds

Lot No.:

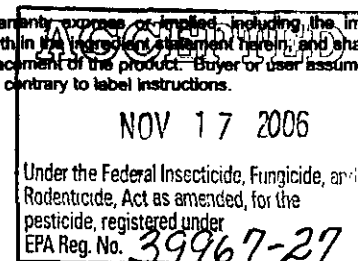

LABEL TEXT DATE: 03/07/05

00000000

39967-27

11/17/2006

Page 1 of 8

2 8 8

LANXESS

Energizing Chemistry

PREVENTOL CMK-Na Preservative Solution

DIRECTIONS FOR USE

LANXESS PRODUCT
EPA Registration Number: 39967-27
CAS # 15 733-22-9

Product Information

Preventol CMK-Na Preservative Solution

FOR USE AS A PRESERVATIVE IN THE MANUFACTURE OF ADHESIVES AND GLUES, POLYMER DISPERSIONS AND EMULSIONS, LEATHER INDUSTRY (FOR THE PROTECTION OF CHROME OR VEGETABLE TANNED LEATHER), LUBRICOLANT AND MINERAL OIL-BASED PRODUCTS, MATERIALS IN THE PRINTING INDUSTRY, BUILDING MATERIALS SUCH AS JOINT CEMENTS AND CONCRETE ADDITIVES, MATERIALS IN THE OIL INDUSTRY, PIGMENT SLURRIES, MATERIALS IN THE TEXTILE INDUSTRY, PAPER, POLISHES, WAXES, PROTEIN SOLUTIONS, CERAMIC GLAZES, FIRE EXTINGUISHING MATERIALS, CLEANING SOLUTIONS, AND DETERGENTS.

LANXESS Product Code/Technical Information Sheet
EPA Registration Number 39967-27

Chemical and Physical Data

Common Name: Parachlorometacresol, sodium salt
Chemical Name: Sodium p-chloro-m-cresolate

Directions for use

ADHESIVES AND GLUES

The weight of Preventol CMK-Na Preservative Solution be used is based on the total weight of the adhesive formulation. Preventol CMK-Na Preservative Solution can be metered directly into the products to be preserved following the concentrations as indicated below. To achieve fast and homogeneous distribution throughout the entire product, stirring is recommended. In the production of dry glues, Preventol CMK-Na Preservative Solution should be added toward the end of thickening in order to minimize any losses of active substance.

EFFECTIVE CONCENTRATION

Bone glues	0.35 - 0.55 %
Skin glues	0.55 - 1.0 %
Casein containing glues	0.60 - 1.2 %
Other animal glues	0.35 - 1.2 %
Starch based glues (liquid)	0.35 - 0.80 %
Starch based glues (solid)	0.35 - 0.80 %
Methyl Cellulose adhesives	0.55 - 0.80 %
Other plant based adhesives	0.35 - 0.80 %
Polyvinyl alcohol adhesives	0.35 - 0.80 %
Acrylic adhesives	0.35 - 0.80 %
Styrene butadiene adhesives	0.35 - 0.80 %
Other adhesive emulsions	0.35 - 0.80 %
Gumarabic and similar adhesives	0.40 - 0.75 %

Preventol CMK-NA Preservative Solution
39967-27

POLYMER DISPERSIONS AND EMULSIONS

Preventol CMK-Na Preservative Solution should be added immediately after the preparation of the polymer dispersion or emulsion during the cooling process. Losses of active ingredient caused by elevated temperatures should be taken into account and avoided by suitable measures. Good stirring is recommended to ensure fast and even distribution of the preservative throughout the products.

EFFECTIVE CONCENTRATION

Acrylic	0.35 – 0.80 %
Polyvinylacetate (PVAc)	0.35 – 0.80 %
Styrene Butadiene (SBR Latex)	0.35 – 0.80 %
Other polymer emulsions	0.35 - 0.80 %

LEATHER

The weight of Preventol CMK-Na Preservative Solution to be used is based on total weight of the product to be protected. Preventol CMK-Na Preservative Solution can be metered directly into the products to be preserved following the concentrations as indicated above. Good stirring is recommended to ensure fast and even distribution of the preservative throughout the products.

In the case of chrome leather, an effective protection against mold attack may be obtained by incorporation of Preventol CMK-Na Preservative Solution into the basifying solution

EFFECTIVE CONCENTRATION

Pickle solutions and pickled hides	0.55 – 0.80 %
Chrome leather (on pelt weight)	0.35 – 0.80 %
Leather pasting adhesives	0.35 – 0.60 %
Leather pigment finishes	0.55 – 1.4 %

METAL WORKING FLUIDS

Preventol CMK-Na Preservative Solution can be incorporated into the original concentrate of metalworking fluids. However, the compatibility with the fluid to be preserved should be evaluated before this method is attempted. Preventol CMK-Na Preservative Solution is equally suitable for tank side addition.

To achieve fast distribution within the ready-to-use dilution of the metalworking fluid, the preservative should be dosed at a point in the system where good circulation is given. Pre-dissolution in water may be favorable.

EFFECTIVE CONCENTRATION

Straight oils (Mineral-oil based)	
(concentrates)	4.00 – 10.0 %
(Preliminary testing for compatibility is indispensable)	
(ready for use)	0.40 – 1.0 %
Soluble oils (emulsions, aqueous)	
(concentrates)	5.0 – 15.0 %
(Preliminary testing for compatibility is indispensable)	
(ready for use)	0.25 – 1.5 %
Semi-synthetic (emulsions, aqueous)	
(concentrates)	5.0 – 15.0 %
(Preliminary testing for compatibility is indispensable)	
(ready for use)	0.25 – 1.5 %
Synthetic (Solutions)	
(concentrates)	5.0 – 15.0 %
(Preliminary testing for compatibility is indispensable)	
(ready for use)	0.25 – 1.5 %

MATERIALS IN THE PRINTING INDUSTRY

The weight of Preventol CMK-Na Preservative Solution to be used is based on total weight of the product to be protected. Preventol CMK-Na Preservative Solution can be metered directly into the products to be preserved following the concentrations as indicated above. Good stirring is recommended to ensure fast and even distribution of the preservative throughout the products.

EFFECTIVE CONCENTRATION

Inks	0.35 – 0.80 %
Fount solutions	0.35 – 0.80 %
Printing pastes	0.35 – 1.0 %
Other printing materials and auxiliaries	0.35 – 1.0 %

MATERIALS IN THE BUILDING INDUSTRY

The weight of Preventol CMK-Na Preservative Solution to be used is based on the total weight of the product to be preserved. The preservative is best incorporated into the materials just following the initial addition of water or other liquid components sufficient to dissolve the preservative. If incorporation happens at later production stages, stirring is recommended to ensure homogeneous distribution of the preservative throughout the product.

EFFECTIVE CONCENTRATION

Joint cements materials	0.35 - 0.80 %
Bitumen emulsions	0.55 - 1.4 %
Concrete additives	0.7 - 1.3 %
Other materials and auxiliaries	0.40 - 1.3 %

MATERIALS IN THE COATINGS INDUSTRY

The weight of Preventol CMK-Na Preservative Solution to be used is based on the total weight of the coating material. The preservative is best incorporated into the products just following the initial addition of water or other liquid components sufficient to dissolve the preservative. If incorporation happens at later production stages, stirring is recommended to ensure homogeneous distribution of the preservative throughout the product.

EFFECTIVE CONCENTRATION

<i>Dyestuff paste, knifing fillers and plastic putty</i>	0.35 - 0.60 %
Casein based coatings	0.75 - 1.3 %
Synthetic resin dispersions	0.35 - 0.80 %
Other auxiliaries and coating materials	0.35 - 1.3 %

MATERIALS IN THE PAPER INDUSTRY

Preventol CMK-Na Preservative Solution can be metered directly into the products to be preserved following the concentrations as indicated above. If necessary, pre-dissolution in water is easily possible due to good water solubility of the preservative. Good stirring is recommended to ensure fast and even distribution of the preservative throughout the entire product.

EFFECTIVE CONCENTRATION

Filler suspensions and coating compounds	0.35 - 0.75 %
Rosin paper sizes	0.40 - 0.80 %
Starch slurries	0.40 - 1.0 %
Other materials and auxiliaries	0.35 - 1.0 %

MATERIALS IN THE TEXTILE INDUSTRY

Preventol CMK-Na Preservative Solution can be metered directly into the products to be preserved following the concentrations as indicated above. If necessary, pre-dissolution in water is easily possible due to good water solubility of the preservative. Good stirring is recommended to ensure fast and even distribution of the preservative throughout the entire product.

In the production of dry printing thickeners, Preventol CMK-Na Preservative Solution should be added toward the end of thickening to minimize any losses of active substance.

EFFECTIVE CONCENTRATION

Printing thickeners (liquid)	0.40 – 0.80 %
Sizes and finishing agents	0.40 – 0.80 %
Yarn humidifiers	0.35 – 0.75 %
Other materials and auxiliaries	0.35 – 0.80 %

MATERIALS IN THE OIL INDUSTRY

The weight of Preventol CMK-Na Preservative Solution to be used is based on the total weight of the product to be preserved. To ensure fast and even distribution of the preservative throughout the product, stirring is recommended. In the production of dry products, Preventol CMK-Na Preservative Solution should be added toward the end of thickening to minimize any losses of active substance.

EFFECTIVE CONCENTRATION

Biopolymers, liquid (drilling muds)	0.40 – 1.0 %
Other materials and auxiliaries	0.40 – 1.0 %

PIGMENT SLURRIES

The weight of Preventol CMK-Na Preservative Solution to be used is based on the total weight of the product to be preserved. The preservative is best incorporated into the materials just following the initial addition of water or other liquid components sufficient to disperse the preservative. If incorporation happens at later product stages, stirring is recommended to ensure homogeneous distribution of the preservative throughout the product.

EFFECTIVE CONCENTRATION

(Kaolin-, Calcium carbonate-Talcum-,Iron oxide etc.)	
Kaolin slurry	0.05 – 0.30 %
Calcium carbonate slurry	0.04 – 0.2 %
Talcum slurry	0.05 – 0.30 %
Iron oxide slurry	0.05 – 0.30 %

ADDITIONAL MATERIALS

The concentration of Preventol CMK-Na Preservative Solution as indicated is based on the total weight of the products to be preserved. For satisfactory results, the preservative must be distributed evenly throughout the product.

EFFECTIVE CONCENTRATION

Polishing and wax materials	0.40 – 1.2 %
Protein solutions	0.6 – 1.0 %
Ceramic glazes	0.4 – 0.6 %
Fire extinguishing materials	0.4 – 1.0 %
Cleaning solutions, detergents	0.35 – 0.6 %

LANXESS Corporation
111 RIDC Park West Drive
Pittsburgh, PA 15272-1112

The conditions of your use and application of our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations, are beyond our control. Therefore, it is imperative that you test our products, technical assistance and information to determine to your own satisfaction whether they are suitable for your intended uses and applications. This application-specific analysis at least must include testing to determine suitability from a technical as well as health, safety and environmental standpoint. Such testing has not necessarily been done by LANXESS Corporation. All information is given without warranty or guarantee. It is expressly understood and agreed that the customer assumes and hereby expressly releases LANXESS from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance and information. Any statement or recommendation not contained herein is unauthorized and shall not bind LANXESS. Nothing herein shall be construed as a recommendation to use any product in conflict with patents covering any material or its use. No license is implied or in fact granted under the claims of any patent.

7/06