


Microfac 320

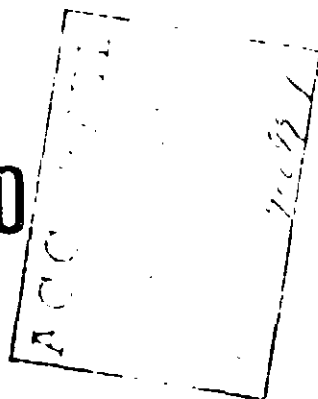

ACTIVE INGREDIENT

Potassium dimethyldithiocarbamate

25.0%

INERT INGREDIENTS

75.0%

This product contains 2.3 lb. of active ingredient per gallon and weighs 9.25 lb. per gallon.

WARNING

KEEP OUT OF REACH OF CHILDREN

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING: Causes eye damage and skin irritation. Harmful if swallowed. Do not get in eyes, on skin, or on clothing. Avoid contamination of food. Wear goggles or face shield and rubber gloves when handling. Wash thoroughly after handling.

STATEMENT OF PRACTICAL TREATMENT. *In case of skin contact,* wash with plenty of soap and water. Remove contaminated clothing and wash before reuse. *If product gets in the eyes,* flush immediately with copious amounts of clean, cool water for at least 15 minutes. Get medical attention immediately. *If product is swallowed,* call a physician immediately. If patient is conscious, induce vomiting by stroking or tickling the patient's throat or far back on patient's tongue. Emetics such as 2 teaspoonsful (10 mL) of ipecac syrup or 1 teaspoonful (5 mL) of dry mustard in warm water to form a paste or even soap in warm water can be used. Repeat until vomit fluid is clear. Then have patient drink plenty of milk, gelatin solution, beaten egg whites, flour and water, or other nonoily demulcent. *Never induce vomiting or give anything by mouth to an unconscious person.*

Note to physician. Probable mucosal damage may contraindicate gastric lavage.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish. Do not discharge into lakes, streams, ponds, or public waters unless in accordance with an NPDES permit. For guidance contact your Regional Office of the EPA.

DIRECTIONS FOR USE GENERAL CLASSIFICATION

For use on the following water bodies, the product should be applied in consistent with the following:

1. *For use on rivers and streams:* Apply 1.0 fl. oz. of Microfac 320 per 1000 gal. of water to the water surface. *For use on lakes:* Apply 1.0 fl. oz. of Microfac 320 per 1000 gal. of water to the water surface. *For use on reservoirs:* Apply 1.0 fl. oz. of Microfac 320 per 1000 gal. of water to the water surface. *For use on water collection trays:* Repeat treatments every 14 days as needed. The required frequency depends on the amount of bleed and severity of some problems.

Microfac 320 is used to control sulfate-reducing bacteria in petroleum secondary recovery water flooding operations. Add 1.9 to 4.8 fl. oz. of Microfac 320 per 1000 gal. of water treated. Technical assistance in applying Microfac 320 to a particular secondary recovery system is available upon request when a description of the problem is provided.

STORAGE AND DISPOSAL

PROHIBITIONS: Do not contaminate water, food, or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL: Pesticide, spray mixture, or rinsate that cannot be used or chemically reprocessed should be disposed of in a landfill approved for pesticides, or buried in a safe place away from water supplies.

CONTAINER DISPOSAL:

METAL: Triple rinse (or equivalent) and offer for recycling, reconditioning, or disposal in an approved landfill or bury in a safe place. Containers over 30 gallons should be resealed before offering for reconditioning.

PLASTIC: Containers under 30 gallons must not be reused but should be triple rinsed and disposed of in an incinerator or landfill approved for pesticide containers or buried in a safe place. Containers over 30 gallons are to be resealed and offered for reconditioning or triple rinsed (or equivalent) and offered for recycling, reconditioning, or disposal in an approved landfill or buried in a safe place.

GENERAL: Consult Federal, State, or Local disposal authorities for approved alternative procedures.

Manufactured by
Rebco Chemicals, Inc.
P. O. Box 6305
Odessa, TX 79760

EPA REG. NO. 40099-1

EPA EST. NO.

NET CONTENTS