

EPA ESTABLISHMENT NO. 40238CA01

# PRO-LINE

KEEP OUT OF REACH OF CHILDREN

DANGER!

## YACHT FINISHES

### PRECAUTIONARY STATEMENTS

**WARNING, Hazards to Humans:** Harmful to Aquatic Life. **HAZARDS TO HUMANS:** Causes eye irritation. Wear protective clothing such as gloves and a long-sleeved cotton shirt for protection. Causes eye irritation. May be fatal if swallowed. Harmful if absorbed through skin or inhaled. This product may be a dermal sensitizer.

Avoid contact with skin, eyes or clothing. Avoid breathing vapors or dust or chips from sanding. Wash thoroughly with soap and water after handling and before eating or smoking. Use with adequate ventilation. Never give anything by mouth to an animal as pet or as feed. Avoid immediately. Avoid storage and usage near food and food products. When used in confined areas or when spraying and sanding be sure that you wear a mask or respirator only approved by the Mining, Engineering and Safety Administration and the Department of Health, Education and Safety and Health under the provisions of 29 CFR 147.110.

### ENVIRONMENTAL HAZARDS


This material is toxic to fish. Do not discharge into water. Use proper equipment or disposal of wastes. Do not allow to be washed down drain during paint removal. Enter water only in approved landfills.

### Physical or Chemical Hazards

**FLAMMABLE FLASH POINT APPROXIMATELY 80 F**

Keep away from heat and open flame

Postcard container on back of this can. See instructions on back of this can for details. This product complies with provisions under 29 CFR 147.110.

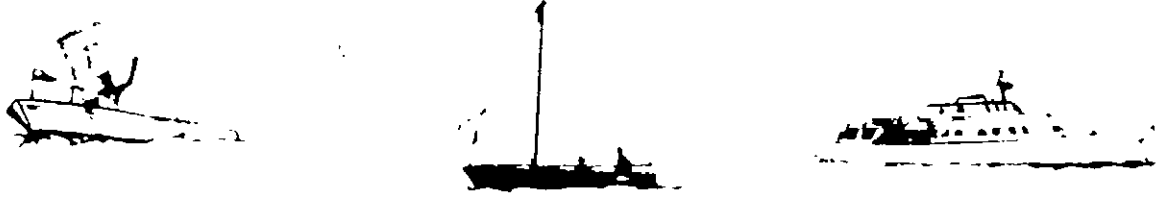

## HI-SPEED ANTIFOULING PAINT

### ACTIVE INGREDIENTS

TRIBUTYL TIN COMPOUND	54
CUPROUS OXIDE	676
<b>INERT INGREDIENTS</b>	<b>230</b>
<b>TOTAL</b>	<b>1000</b>

NET CONTENTS: LBS. Gal.

EPA REGISTRATION NO 40238-2

**IE**<sup>®</sup>

**FOLLOW ALL SAFETY AND HEALTH REGULATIONS PRACTICAL TREATMENT**

**IF SWALLOWED:** Drink promptly a large quantity of milk, egg whites, greater solution if these products are available, drink large quantities of water. Avoid food. Get medical attention.

**IF IN EYES:** Flush with plenty of water, get medical attention.

**IF ON SKIN:** Wash with plenty of soap and water. Get medical attention.

**IF INHALED:** Remove victim to fresh air, if breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

**NOTE TO PHYSICIAN:** Potentially serious damage may contraindicate the use of gastric lavage.

**WARRANTY:** Pro Line warrants that the contents of this container conform to the product's description on this label.

**THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF. IN NO EVENT SHALL PRO-LINE BE LIABLE FOR ANY INCIDENTAL SPECIAL OR CONSEQUENTIAL DAMAGES OF ANY NATURE WHATSOEVER INCLUDING WITHOUT LIMITATIONS LOSS OR USE OF LOST PROFITS.**

This product may not carry the implied warranties of the container manufacturer.

- STORAGE AND DISPOSAL**
- 1. PROHIBITIONS:** Do not contaminate potable water, food, or feed by storage or disposal. Open dumping is prohibited.
  - 2. PESTICIDE DISPOSAL:** Pesticide sprays that are obsolete that cannot be used or them can be reprocessed should be disposed of according to procedures approved by federal, state, or local disposal authorities.
  - 3. CONTAINER DISPOSAL:** Dispose in approved landfills.

**DIRECTIONS FOR USE OF PRO-LINE #1088 SERIES**

For use on the following surfaces: ALUMINUM, STEEL, FIBERGLASS, WOOD, FERRO-CEMENT, and LAUNCH TIME. THE SURFACE MUST BE FREE OF ALL SURFACE CONTAMINATION AND MOISTURE.

**HI-SPEED ANTIFOULING PAINT**  
#1088-01 BLUE #1088-02 BLACK #1088-03 RED

**APPLICATION:** Mix thoroughly and stir well before using.  
**ALUMINUM:** The product is not suitable for ALUMINUM.

**STEEL:** Remove all surface contaminants. MARINE BASTARD should be used on steel. After a coat is applied, allow to dry for 24 hours before applying a second coat. Apply a third coat if necessary.

**FIBERGLASS HULL - UNPAINTED:** Wash with a solution of warm water and TSP. Rinse with fresh water and dry thoroughly. Apply primer. Re-coat with this product. Apply a second coat after 24 hours. Re-coat after 30 days.

**WOOD:** Wash with a solution of warm water and TSP. Rinse with fresh water and dry thoroughly. Apply primer. Re-coat with this product.

**OLD ANTIFOULING:** Must be removed before application. Remove old antifouling paint. After surface is prepared, apply this product.

**FERRO-CEMENT:** Not recommended.

**RECOAT TIME:** 30 days between coats.

**LAUNCH TIME:** 30 days after application.

**THINNING:** Not recommended.

**NON-PHOTOCHEMICALLY REACTIVE**

**PRO-LINE PAINT MANUFACTURING CO.**

PHONE (619) 232-8968 LONG BEACH (213) 432-7961