

# PRO-LINE

KEEP OUT OF REACH OF CHILDREN.

**WARNING!**

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

#### STORAGE AND DISPOSAL

- 1. PROHIBITIONS:** Do not contaminate potable water, food, or feed by storage or disposal. Open dumping is prohibited.
- 2. PESTICIDE DISPOSAL:** Pesticide, spray mixture, or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by federal, state or local disposal authorities.
- 3. CONTAINER DISPOSAL:** Triple rinse and offer for recycling, reconditioning, or disposal in approved landfill or bury in a safe place.
- 4. GENERAL:** Consult federal, state or local disposal authorities for alternative procedures.

#### PRECAUTIONARY STATEMENTS

**WARNING:** Hazards to Humans and Domestic Animals. Harmful if swallowed. Causes eye and skin irritation. Do not get in eyes, on skin, or on clothing. In case of skin contact remove contaminated clothing and immediately wash affected area with soap and water. If irritation persists, get medical attention. Wash contaminated clothing before reuse. For eyes, flush with plenty of water and get medical attention.




If swallowed, drink one or two glasses of water. Induce vomiting by sticking finger in back of throat. Never give anything by mouth to an unconscious person. Call a physician immediately.

Avoid storage and usage near food and feed products. When used in confined areas or applied by spraying wear a respirator jointly approved by the Mining Enforcement and Safety Administration and by the National Institute for Occupational Safety and Health under the provision of 30 CFR 11.

#### ENVIRONMENTAL HAZARDS

Do not contaminate water by disposal of wastes.

## Technical Coatings

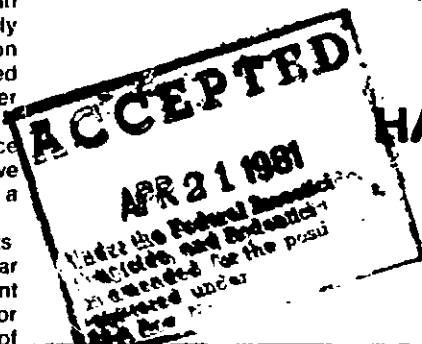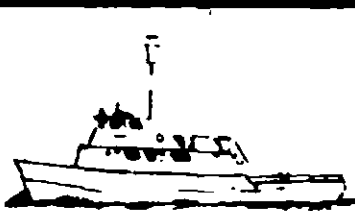

### 1080-H HARD VINYL ANTIFOULING PAINT

<b>ACTIVE INGREDIENTS</b>	
CUPROUS OXIDE .....	48.74%
<b>INERT INGREDIENTS</b> .....	
TOTAL .....	51.26%
	100.00%

E

EPA REGISTRATION NO. 40238-3

EPA ESTABLISHMENT  
NO. 40238CA01

Physical or Chemical Hazards

**FLAMMABLE, FLASH POINT  
APPROXIMATELY 80°F.**

**DO NOT STORE OR USE NEAR HEAT  
OR OPEN FLAME.**

Follow all safety and health pre-  
cautions established by local, state  
and federal agencies.

### DIRECTIONS FOR USE OF PRO-LINE 1080-H SERIES

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

#### HARD VINYL ANTIFOULING PAINT 1080-H

**APPLICATION:** May be brushed, rolled or sprayed. **Stir well before using.**

**ALUMINUM:** These products ARE NOT FOR USE ON ALUMINUM

**STEEL:** Bare steel should be sandblasted to a #10 MARINE BLAST to remove all rust and mil scale. After sandblasting apply 3-coats of EPOXY PRIMER #4000 series giving a total dry mil thickness of at least 12-MILS. See note prior to applying antifouling paints!

#### FIBERGLASS

**HULL-UNPAINTED:** Scrub hull with a solution of warm water and TSP. Rinse with fresh water. Sand hull lightly with 80-grit Garnet Paper. Remove dust with clean rag. Apply a uniform light coat of #4000 Primer. See note prior to applying antifouling paints!

**WOOD:** Over bare wood apply 1ST COAT of ANTI-FOULING thinned with PRO-LINE #20 (one-quart per gallon of antifouling). Apply 2nd COAT unthinned.

**OLD ANTIFOULING:** May be applied over most aged antifouling paint when surface is thoroughly tight, clean and dry.

**FERRO CEMENT:** Not recommended.

**RECOAT TIME:** 2-hour minimum - No maximum between antifouling paints.

**LAUNCH TIME:** 4-hours after last coat of antifouling paints.

**THINNING:** If necessary use either #4 or #20 THINNER.

**NOTE:** When antifouling is applied over Epoxy Primers, the antifouling must be applied within 3-5 hours after last coat of Epoxy Primer.

This product is effective in preventing marine growth such as barnacles, bugulas, etc.

**THE SURFACE MUST BE FREE OF ALL SURFACE  
CONTAMINATION AND MOISTURE.**

**NON-PHOTOCHEMICALLY REACTIVE**

PRO-LINE PAINT MANUFACTURING CO.

636 MAIN ST. - SAN DIEGO, CALIFORNIA 92114

PHONE (714) 232-8968 — LONG BEACH (213) 432-7961