

U.S. ENVIRONMENTAL PROTECTION AGENCY OFFICE OF PESTICIDES PROGRAMS REGISTRATION DIVISION (WH-567) WASHINGTON, D.C. 20460	EPA REGISTRATION NO. 41750-2	DATE OF ISSUANCE
	TERM OF ISSUANCE	
	NAME OF PESTICIDE PRODUCT AWLGRIP AWLSTAR Antifouling Gold Label BP	
NOTICE OF PESTICIDE: <input checked="" type="checkbox"/> REGISTRATION <input type="checkbox"/> REREGISTRATION (Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended)		
NAME AND ADDRESS OF REGISTRANT (Include ZIP code)		
U.S. Paint Division Grow Group, Inc. 831 South 21th Street St. Louis, MO 63103 Attn: Marjorie Hammerschmidt		
NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.		
On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.		
A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.		
Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.		
This product is conditionally registered in accordance with FIFRA sec. 3(c)(7)(A) provided that you:		
(1) Submit and/or cite all data required for registration/reregistration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data.		
(2) Make the labeling changes listed below before you release the product for shipment:		
<ul style="list-style-type: none"> ✓ a. Add the phrase "EPA Registration No. 41750-2." ✓ b. Change the heading "Instructions For Use" to "Directions For Use." ✓ c. Place the "misuse statement" directly beneath the "Directions For Use" heading. ✓ d. Add the phrase "If swallowed, drink promptly a large quantity of water" to the "Statement of Practical Treatment (First Aid)". ✓ e. Place the Active Ingredients statement above the signal word "Warning" and the phrase "Keep Out of Reach of Children". 		
<input checked="" type="checkbox"/> ATTACHMENT IS APPLICABLE		
SIGNATURE OF APPROVING OFFICIAL		DATE

Jul 25 1990

2 9/11

*NA - Product
Marketing Division
Registration*

(3) One year storage and stability data at ambient room temperature is acceptable and it satisfies 12 months storage and stability data requirement.

(4) Submit five (5) copies of your final printed labeling before you release the product for shipment. Refer to the A-79 Enclosure for a further description of final printed labeling.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 5(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.

Sincerely yours,

John H. Lee
John H. Lee
Product Manager (31)
Antimicrobial Program Branch
Registration Division H7505C

Enclosure

.....
.....
.....
.....
.....
.....
.....
.....
.....
.....

AWLGRIP® AWLSTAR

ANTI-FOULING GOLD LABEL

BP

Tin Free Co-polymer
KEEP OUT OF REACH OF CHILDREN


WARNING!

SEE BACK PANEL FOR PRECAUTIONARY STATEMENTS.

ACTIVE INGREDIENTS	EPA Regis. # 41750-77
Cuprous oxide.....44.15%	EPA Estab. # 41750M001
INERT INGREDIENTS.....55.85%	Batch # see lid
100.00%	

! Contains petroleum distillates
*Equivalent to 38.95% metallic Cu

SELF-POLISHING RACING TYPE

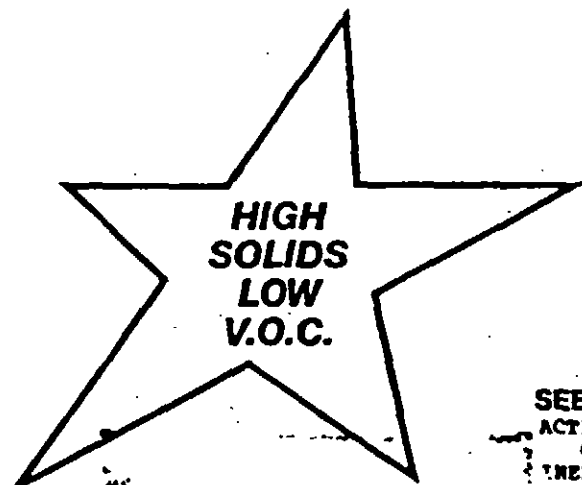

ACCEPTED
with COMMENTS
in EPA Letter Dated

Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide registered under EPA Reg. No. 41750-2

831 So. 21st St., **U.S. PAINT** St. Louis, Mo.

ONE QUART U.S. MEASURE (.946 LITER)

BEST AVAILABLE COPY

BEST COPY AVAILABLE

PRECAUTIONARY STATEMENTS. WARNING!

HAZARD TO HUMANS AND DOMESTIC ANIMALS

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear a face shield and rubber gloves when handling. Use in a well ventilated area. When used in confined areas or applied by spraying, wear protective clothing and a pesticide respirator jointly approved by the Mining Enforcement and Safety Administration (formerly the U.S. Bureau of Mines) and by the National Institute for Occupational Safety and Health under the provisions of 30 CFR 11. May be fatal if swallowed or inhaled. Do not breath vapors or spray mist.

PRACTICAL TREATMENT: In case of skin contact, remove contaminated clothing and immediately wash skin with soap and water. Get medical attention. Wash contaminated clothing before reuse. If inhaled, remove to fresh air. Use artificial respiration if breathing has stopped. Get medical attention. If swallowed, DO NOT induce vomiting. This product contains petroleum distillates. Get medical attention. If in eyes, immediately flush with plenty of water. Get medical attention.

ENVIRONMENTAL HAZARDS: This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

CHEMICAL AND PHYSICAL HAZARDS: Do not use or store near heat or open flame.

STORAGE AND DISPOSAL: Do not contaminate water, food or feed by storage or disposal. Pesticide disposal—Pesticide, paint or rinsate that cannot be used according to label directions must be disposed of according to Federal, State or local procedures under the Resource Conservation and Recovery Act. Container disposal—Triple rinse (or equivalent) and offer for recycling or reconditioning, or dispose of in a sanitary landfill, or by other approved State and local procedures.

IMPORTANT! It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

AWLGRIP™ AXLSTAR™ Gold Label Anti-Fouling are particularly designed for application to underwater areas subject to fouling by barnacles, algae, tube worms and other fouling organisms.

All federal, state, and local regulations must be observed when using this product.

INSTRUCTIONS FOR USE Surface Preparation and Priming: Surfaces should be clean and free of any dirt, grease, oil, wax, etc. Commercial sandblast to clean steel in accordance with SSPC-5 profile or power grind with a 16-24 disc to obtain a particularly jagged, grind to remove "spikes", providing a immediately seal the bare steel with AXLGRIP™ 545 (Gray D100), HULL-GARD™ E.R. (73057). After sealing, continue to prime with achieve a minimum of 12 mils DFT of HULL-GARD™ materials. should only be applied over a base coat of HULL-GARD™ E.R. machine sand surface with 100-150 grit. Sand just enough to the surface. Do not sand excessively. This will only create the surface that will have to be filled. Immediately seal the 545 Epoxy Primer (D8001-White D1001-Gray D7001-Red) or HULL After sealing, continue to prime with HULL-GARD™ Primers to a mils DFT of HULL-GARD™ materials. Note HULL-GARD™ W.B. should base coat of HULL-GARD™ E.R. Wood: The wood must be clean. Sand the surface smooth with 80-120 grit paper. Seal the wood AXLGRIP™ 545 Primer reduced 40% with T0006. After sealing the coat of HULL-GARD™ E.R. Then continue to apply HULL-GARD™ 5 mils (minimum dry film thickness) of HULL-GARD™ materials. Anti-fouling is not recommended for use on aluminum hull Surfaces: Old Anti-fouling should be thoroughly cleaned before AXLSTAR™ Gold Label. Pressure washing as soon as possible after is advised. This allows removal of salt and contaminants which solution before they have an opportunity to dry and cake. AXLGRIP™ AXLSTAR™ Gold Label: Hulls previously finished in AWL is now wearing thin can be easily renewed. Wash down hull pressure, clean water wash to remove all salts and surface surface can be lightly scrubbed with a brush if necessary to slime or other contamination. The surfaces must be clean and oil, grease, salt, dirt, corrosion, or other surface coating. inspect the cleaned hull for damage to the existing AXLGRIP™ breaks to the coating system should be cleaned of all corrosion sanded or ground to a feather edge and spot primed with H applied in 3 to 4 heavy coats. Do not prime over AXLSTAR™ Gold Label. Anti-fouling compatibility: Many boat owners will want to a GOLD LABEL over their existing anti-fouling for economic AXLSTAR™ GOLD LABEL will work over some existing anti-fouling endorse this practice as we have no control over other anti-fouling quality control or formulation changes. AXLSTAR™ GOLD LABEL de over any of the tin-copolymer or organo-tin type anti-fouling conventional types. AXLSTAR™ GOLD LABEL should work over conventional type anti-fouling and ablative copolymer anti-fouling copper. The most common problem encountered with these application. A test application should be made and allowed to dry overnight entire hull, unless all other anti-fouling is removed. DO NOT anti-fouling paints. MIXING INSTRUCTIONS Spray: For air normally not recommended. If the viscosity has to be reduced application, thin with up to 10% (12 oz. per gallon) of T01 amount of reducer. Proper film thickness is critical to durability of AXLGRIP™ AXLSTAR™ Gold Label Anti-fouling. before application. Roller/Brush: Reduce as necessary, up to T0101. Additional reduction (up to 20% max.) will improve flow and help eliminate brush marks. It will times and decrease the amount of dry film obtained per coat coats to achieve proper dry film thickness. Proper film thickness performance and durability of AXLGRIP™ AXLSTAR™ Gold Label. Agitate thoroughly before applying. APPLICATION INSTRUCTIONS Anti-fouling should be applied when the final HULL-GARD™ PFT tack-free. Airless spray or roller is the preferred method the material can be applied by brush or air atomized spray. performance, apply a minimum of three coats at 9 mils wet film achieve 4 mils dry film thickness per coat, giving a total thickness. Use one gallon of AXLSTAR™ Gold Label for each area to achieve 12 mils dry film thickness. If multi-season performance lesser quantities may be applied. Ablation may occur, very of less than 5 mils dry film thickness. Apply the first coat than the finish coats. When the first color shows through. Allow four hours (77°F 50% R.H.) between coats and 5 hours launching. There is no maximum launch time. Use T0101 or T0102 Read Technical Product Data Bulletin for complete application before using this product. Do not apply or attempt to cure this

FOR USE IN COMMERCIAL SHIPYARDS ONLY

U.S. PAINT

831 South 21st Street
St. Louis, Missouri
63103-3092

Date 1 Sept
© 1989, U.S.