

TRICHLOR TIME RELEASE CANISTER

For use in Erosion Feeder

Active Ingredient: Trichloro-s-triazinetrione: 99%
Other Ingredients: 1%
Total: 100%
Available Chlorine: 90%

KEEP OUT OF REACH OF CHILDREN

DANGER

SEE FIRST AID AND PRECAUTIONS ON SIDE PANEL


PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: CORROSIVE. Causes irreversible eye damage. May be fatal if absorbed through skin. May be fatal if inhaled. Do not breathe dust or spray mists. Irritating to nose and throat. Harmful if swallowed. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield when handling this product. Wash thoroughly with soap and water after handling and before eating, drinking or using tobacco. Remove contaminated clothing and wash separately before reuse.

FIRST AID	
If in eyes	<ul style="list-style-type: none"> Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. Call a poison control center or doctor for treatment advice.
If on skin or clothing	<ul style="list-style-type: none"> Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.
If inhaled	<ul style="list-style-type: none"> Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible. Call a poison control center or doctor for further treatment advice.
If swallowed	<ul style="list-style-type: none"> Call poison control center, or doctor immediately for treatment advice. Have person sip a glass of water if able to swallow. Do not induce vomiting unless told to do so by the poison control center or doctor. Do not give anything by mouth to an unconscious person.
Have the product container or label with you when calling a poison control center or doctor, or going for treatment. IN CASE OF MEDICAL EMERGENCY, CALL 1-800-255-3924	
NOTE TO PHYSICIAN * Probable mucosal damage may contraindicate the use of gastric lavage.	

NET WEIGHT: 5 lbs (2.27 kg.)

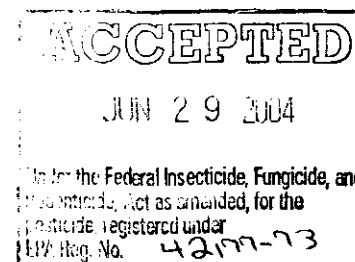

42177-73

06/29/2004

1/3

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish and aquatic organisms.

PHYSICAL AND CHEMICAL HAZARDS:

Strong Oxidizing Agent. Mix only with water. Use clean dry utensils. Do not add this product to any dispensing device containing remnants of any other product. Such use may cause a violent reaction leading to fire or explosion. Contamination with moisture, organic matter, or other chemicals may start a chemical reaction, with generation of fire and explosion. In case of contamination or decomposition, do not reseal container. If possible isolate container in open air or well ventilated area. Flood with large volumes of water, if necessary.

**SWIMMING POOL SANITIZER FOR USE IN
E-Z CLOR® FEEDER**

This product, when used as directed, automatically releases the correct amount of chlorine to sanitize your pool. This reduces the growth of harmful algae and microorganisms in your pool for several weeks. This product is not a floating device and is only to be used with automatic chlorinating systems such as a refill for automatic chlorinating systems using the Type "E" refill cartridge.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling. Read entire label and use strictly in accordance with precautionary statements and directions


Ensure all pool equipment is working properly. Backwash the filter system following manufacturer's instructions. Adjust pH to between 7.2-7.6. Add stabilizer to establish a minimum stabilizer level of 30-40 ppm to reduce the degradative effects of sunlight upon the chlorine residual. Maintain sanitizer residual in accordance with label directions found on the sanitizer of

choice. When using other products as outlined in directions for this product, always follow directions on those products. Do not attempt to open or refill this cartridge.

1. Select a large nail, sharp knife or similar tool to punch out dimples per step #2. Place cartridge on a solid surface and work carefully to avoid injury.
2. Punch out appropriate dimples on both of the upper sides of cartridge according to the chart below based on the size of your pool.

Gallons of pool water:	Dimples to punch:
5,000	1
10,000	1,2, & 3
15,000	1,2,3,4, & 5
20,000	1,2,3,4,5,6, & 7
25,000	1,2,3,4,5,6,7,8, & 9

Example: 15,000 gallon pool: Punch out dimples numbered 1,2,3,4 and 5.

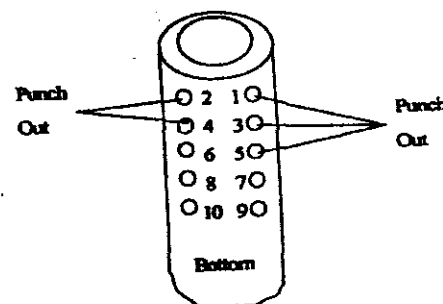

3. Punch out all 8 (eight) clear dots on top of cap.
4. Turn cartridge upside down and place into chlorinator. Follow equipment manufacturer's directions for installation of the Type "E" cartridge.

5. After cartridge has been in use for 24 hours, check the chlorine level with a test kit or test strips. The correct chlorine level range is 1-3 ppm. If level is below 1 ppm, punch out next higher number. If level is above 3 ppm, cover highest hole with water proof tape. Make additional adjustments as required to maintain a 1-3 ppm chlorine residual.

NOTE: Re-entry into treated swimming pool is prohibited above levels of 3.0 ppm of chlorine due to risk of bodily injury.

FOR USE IN DUAL CHAMBER FEEDER

TO START CONTINUOUS CHLORINATION:

1. With recirculating system off, grip canister by handle and insert into feeder chamber in an upside down position.
2. Push container down into the chamber with enough thrust to allow it to be pierced by the sharp puncture pieces in the bottom and side of the chamber.
3. Replace lid and tighten knobs to secure seal. Note: If canister has been inserted in an incorrect position, lid will not seal. Set output control to 50% and start recirculation system.
4. Continuous chlorination through pool recirculation system takes place only when pump is on. Run recirculation system each day sufficient hours to maintain adequate chlorine levels and clear water.

TO ADJUST CONTINUOUS CHLORINATION

1. Test pool water regularly for pH and free chlorine. If chlorine residual is less than 1.5 ppm, adjust output control to HIGHER % selection as necessary to maintain 1.5 to 2.5 ppm. If chlorine residual is more than 2.5 ppm, adjust OUTPUT CONTROLLER to LOWER chlorine level.

2. Re-test chlorine residual 24 hours after any adjustment.

3. Periodically check tablet level in canister through viewing window on side of feeder. Insert new canister when old one is almost empty. DO NOT REUSE container. DESTROY WHEN EMPTY.

PERIODIC SHOCK TREATMENT: A shock treatment should be made every week during hot weather or after heavy rain. Less frequent shock treatments may be made during cool weather. For the shock treatments, add a fast dissolving chlorine according to the label directions for that product.

NOTE: Re-entry into treated swimming pool is prohibited above levels of 3.0 ppm of chlorine due to risk of bodily injury.

STORAGE AND DISPOSAL

Keep this product dry in original tightly closed container when not in use. Store in a cool, dry, well ventilated area away from heat or open flame. Moisture may decompose this product and cause a violent reaction leading to fire and explosion. In case of decomposition, isolate container if possible and flood area with large volumes of water to dissolve all material before discarding this container. Do not contaminate food or feed by storage or disposal.

CONTAINER DISPOSAL: Do not reuse container, but place in trash collection. Rinse thoroughly before discarding.

Manufactured for:

Alliance Trading, Inc.

109 Northpark Blvd, 4th Floor

Covington, LA 70433

EPA Reg. No. 42177-73

EPA Est. No. 5185-GA-1