

Merow

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS (AND DOMESTIC ANIMALS)

DANGER

Corrosive. Causes eye and skin damage and skin irritation. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful if swallowed.

First Aid Statements: If on skin, wash immediately with soap and water. Get medical attention if irritation persists. If swallowed, do not induce vomiting. Get immediate medical attention.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public waters. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on the label.

PHYSICAL OR CHEMICAL HAZARDS

Do not use, pour, spill or store near heat or open flame. Use only with adequate ventilation.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling.


STORAGE AND DISPOSAL

Do not use empty container. Wrap container and put into trash collection.

COMBUSTIBLE.

See precautions elsewhere on label.

EPA Registration No. 42273-1
EPA Establishment No. 42273-NY-1

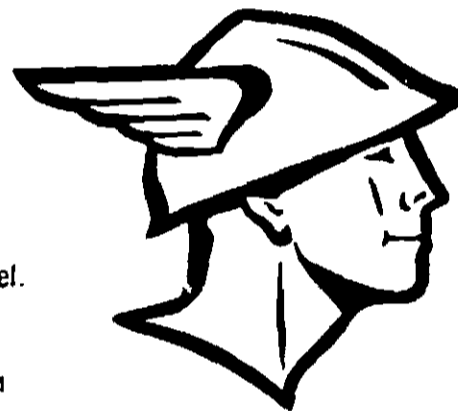


**KEEP OUT OF REACH
DANGER!**

Active Ingredient:
Bis (tri-n-butyltin) oxide (9%)
Inert Ingredients: ...

EXTERIOR — READY MIXED PENETRATING OIL STAIN

B4
**Brings Out the Natural Beauty of Wood
Protects Against Moisture, Mildew and Rot**

Mercury

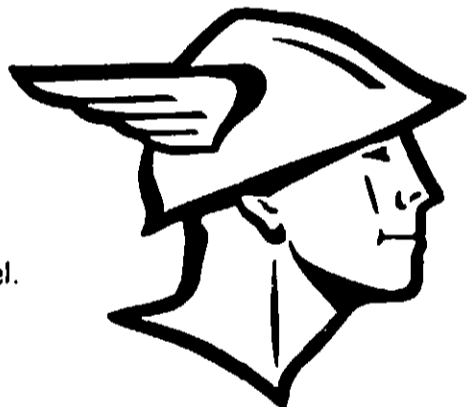

**KEEP OUT OF REACH OF CHILDREN
DANGER!**

Active Ingredient	
Bis (tri-n-butyltin) oxide (95%)	0.52%
Inert Ingredients	99.48%
	<hr/>
	100.00%

FLAMMABLE.
See elsewhere on label.

Registration No. 42273-1
Patent No. 42273-NY-1

EXTERIOR — READY MIXED PENETRATING OIL STAIN

⁶⁴
*Protect the Natural Beauty of Wood
Against Moisture, Mildew and Rot*

PENETRATING OIL STAIN

Multi-Purpose Stain for all kinds of unsealed exterior wood. Ideal for paneling, furniture, floors, exposed beams, woodwork, doors, trims, rough or smooth.

INSTRUCTIONS

1. Apply Penetrating Oil Stain only to surfaces that are completely free from other finishes. No primer or sealer should be used. Two coats are recommended.
2. Light or dark effects are obtained by varying the amount applied and length of time stain is allowed to remain on the surface.
3. Mix contents thoroughly and apply the first coat with a brush or cloth; allowing the stain to penetrate. After about 15 minutes, remove the excess with clean cloth. When surface is dry, apply the second coat in the same manner.
4. Penetrating Stain comes ready to use and no thinning is necessary. Covers approximately 300 sq. ft. per gallon depending upon porosity of surface.
5. Final finish is obtained by applying desired Mercury Varnish.

⁶⁵
MERCURY PAINT CORPORATION
BROOKLYN, NEW YORK 11203

ACCEPTED

SEP 11 1980

Under the Federal Insecticide, Fungicide, and Rodenticide Act, this product is registered under EPA Reg. No. 42237-1

65-A

2 100
EPA 65-A