




**LABOR - SAVER
ANTI-FOULING
STRIPPABLE TAPE**

ACTIVE INGREDIENT-Tributyltin Fluoride	9.5%
INERT INGREDIENTS	90.5%
TOTAL	100.0%

**C. JICK —
EASY
EFFICIENT**

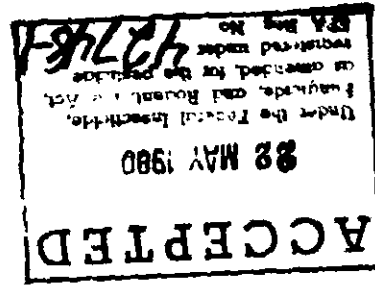

DANGER — KEEP OUT OF REACH OF CHILDREN
See side panel for precautionary statements

Manufactured by
Labor-Saver Marine Products Co.
P.O. Box 154 Union, N.J. 07083
EPA Registration No. 42748-1
Net Contents 300 linear ft.

Refer to directions for use enclosed in package.

LABOR-SAVER ANTI-FOULING STRIPPABLE TAPE is available in rolls of 100 - 200 - 300 linear feet, by 4 inches in width with a paper separator sheet to preserve any unused tape. The Anti-fouling coating on the tape is of high quality. Anti-fouling duration depends entirely upon water temperature, saline content, geographic location etc. A 100 foot roll by 4" width will cover a 30 sq ft area. 200 ft roll, 60 sq ft. 300 ft roll, 90 sq ft.

DANGER - KEEP OUT OF REACH OF CHILDREN
PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

The coating on this tape contains a harmful pesticide that is corrosive, causes severe eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear gloves and keep hands away from face, mouth and eyes when handling this product.

STATEMENT OF PRACTICAL TREATMENT

If swallowed see a physician immediately. If in eyes or on skin, rinse with plenty of water for 15 minutes. See a physician. This product should be used by adults only.

ENVIRONMENTAL HAZARDS

Do not contaminate water by cleaning of equipment or disposal of wastes

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. This tape can be applied to any (clean) boat surface.

1. Prepare boat surface (first time only) by removing all marine growth, loose paint, grease, oil or dust. This is very IMPORTANT. Wipe clean with cloth and ordinary paint thinner such as sub-turps or Varsol and let dry.
2. Apply tape, starting at stern waterline or slightly above. Put end of tape 2" around on side then along waterline to 2" around other side, then cut. Apply additional strips downward, overlapping previous strip by 1/2". Hold tape away from boat and smooth on to prevent air bubbles from forming.
3. After stern is covered, start side 3" around on stern, then along side waterline to center of bow, then cut. Continue on down, overlapping as before, to center of keel. Repeat on opposite side.
4. Finally apply a strip from bow center, 3" above waterline, down along keel to stern waterline. This completes seal of both sides. **YOUR BOAT IS NOW READY FOR USE.** NOTE: Should you find it necessary to piece the tape anywhere along the side, this may be done as long as the **LEADING EDGE OF SEAM FACES REAR OF BOAT.** When buildup of marine growth requires removal of tape it is recommended that gloves be worn for protection against any sharp edges or marine growth. After tape is removed, there is no need for any further cleaning, just apply new tape and you are ready to sail.

STORAGE AND DISPOSAL

Do not reuse plastic bag or package the tape came in. Dispose of in trash container when empty. Part rolls of tape should be stored in sealed bag, **CUT OF REACH OF CHILDREN.** Dispose of used tape in trash container.

U.S. ENVIRONMENTAL PROTECTION AGENCY
OFFICE OF PESTICIDES PROGRAMS
REGISTRATION DIVISION (WH-567)
WASHINGTON, D.C. 20460

EPA REGISTRATION NO.

42748-1

DATE OF ISSUANCE

July 31, 1982

TERM OF ISSUANCE

NAME OF PESTICIDE PRODUCT

NOTICE OF PESTICIDE: REGISTRATION
 REREGISTRATION

(Under the Federal Insecticide, Fungicide
and Rodenticide Act, as amended)

NAME AND ADDRESS OF REGISTRANT (Include ZIP code)

NOTE Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.

A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.

Registration is in no way to be construed as an endorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

BEST DOCUMENT AVAILABLE

98

ATTACHMENT IS APPLICABLE


BEST AVAILABLE COPY

SIGNATURE OF APPROVING OFFICIAL

LABOR - SAVER ANTI-FOULING STRIPPABLE TAPE

ACTIVE INGREDIENT-Tributyltin Fluoride	9.5%
INERT INGREDIENTS	90.5%
TOTAL	100.0%

**CLICK —
EASY
EFFICIENT**

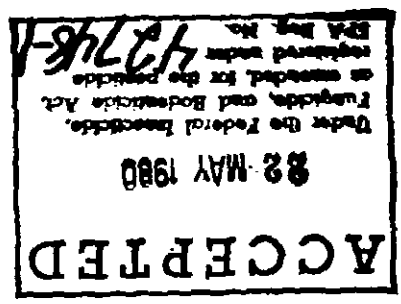

DANGER — KEEP OUT OF REACH OF CHILDREN
See side panel for precautionary statements

Manufactured by
Labor-Saver Marine Products Co.
P.O. Box 154 Union, N.J. 07083
EPA Registration No. 42748-1
Net Contents 300 linear ft.

Refer to directions for use enclosed in package.

LABOR-SAVER ANTI-FOULING STRIPPABLE TAPE is available in rolls of 100 - 200 - 300 linear feet, by 4 inches in width with a paper separator sheet to preserve any unused tape. The Anti-fouling coating on the tape is of high quality. Anti-fouling duration, depends entirely upon water temperature, saline content, geographic location etc. A 100 foot roll by 4" width will cover a 30 sq. ft. area. 200 ft. roll, 60 sq. ft. 300 ft. roll, 90 sq. ft.

DANGER - KEEP OUT OF REACH OF CHILDREN

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

The coating on this tape contains a harmful pesticide that is corrosive, causes severe eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear gloves and keep hands away from face, mouth and eyes when handling this product.

STATEMENT OF PRACTICAL TREATMENT

If swallowed see a physician immediately. If in eyes or on skin, rinse with plenty of water for 15 minutes. See a physician. This product should be used by adults only.

ENVIRONMENTAL HAZARDS

Do not contaminate water by cleaning of equipment or disposal of wastes.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. This tape can be applied to any (clean) boat surface.

1. Prepare boat surface (first time only) by removing all marine growth, loose paint, grease, oil or dust. This is very **IMPORTANT**. Wipe clean with cloth and ordinary paint thinner such as sub-turps or Varsol and let dry.
2. Apply tape, starting at stern waterline or slightly above. Put end of tape 2" around on side then along waterline to 2" around other side, then cut. Apply additional strips downward, overlapping previous strip by 1/2". Hold tape away from boat and smooth on to prevent air bubbles from forming.
3. After stern is covered, start side 3" around on stern, then along side waterline to center of bow, then cut. Continue on down, overlapping as before, to center of keel. Repeat on opposite side.
4. Finally apply a strip from bow center, 3" above waterline, down along keel to stern waterline. This completes seal of both sides. **YOUR BOAT IS NOW READY FOR USE. NOTE!** Should you find it necessary to piece the tape anywhere along the side, this may be done as long as the **LEADING EDGE OF SEAM FACES REAR OF BOAT**. When buildup of marine growth requires removal of tape it is recommended that gloves be worn for protection against any sharp edges or marine growth. After tape is removed, there is no need for any further cleaning. Just apply new tape and you are ready to sail.