

43358-3

**DIRECTIONS FOR USE
GENERAL CLASSIFICATION**

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

TSWBSM is used to control algae, bacteria, and fungi in recirculating commercial and industrial water cooling towers. Prior to its use, systems must be cleaned to remove algal growth, microbiological slime, and other deposits. An initial slug addition of 1.90 to 4.75 fluid ounces of TSWBSM per 1000 gallons of water to provide a concentration of 16 to 40 parts per million of TSWBSM, based on the total weight of water in the system, is recommended. Repeat initial dosage until control is evident.

Subsequent slug additions of 0.47 to 4.75 fluid ounces of TSWBSM per 1000 gallons of water (4 to 40 parts per million of TSWBSM) should be employed every 2 to 5 days, or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the microbiological problem. Slug additions should be made in the sump of water cooling towers.

TSWBSM is used to control bacteria in industrial air washing systems. For an effective, dust eliminating component, prior to its use, systems should be cleaned to remove bacterial slime and other deposits. An initial slug dose of 1 to 11.9 fluid ounces of TSWBSM per 1000 gallons of water is recommended. Repeat initial dosage until control is evident. Subsequent slug additions of 1.9 to 11.9 fluid ounces of TSWBSM per 1000 gallons of water should be employed every 1 to 5 days, or as needed. The frequency of addition depends upon the relative amount of bleedoff and severity of the bacterial problem. Slug additions may be made to the sump of the water supply to the air wash system.

ACTIVE INGREDIENT

Poly[oxyethylene (dimethyliminio) ethylene (dimethyliminio) ethylene dichloride]

INERT INGREDIENT

This product contains 2.67 % of active ingredient. Total weight weighs 8.90 lb per gallon.

KEEP OUT OF REACH OF CHILDREN

CAUTION

HAZARD STATEMENT


CAUTION: Harmful if swallowed. Irritates skin, eyes, nose, throat.

FIRST AID: If swallowed, drink water. If in eyes, flush with water. Avoid contact with skin.

ENVIRONMENTAL: Do not release into lakes, streams, or ditches. This product is not for use in residential areas.

Preparation: See label for directions. Avoid contact with skin.

Approved by EPA for use in water treatment systems.

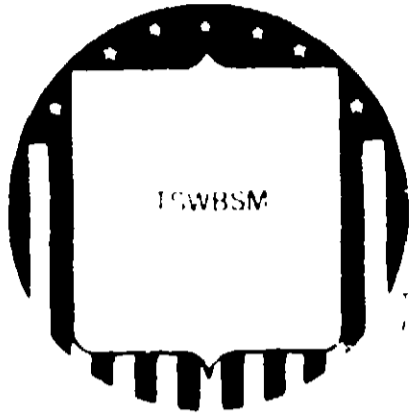

43358-3

INSTRUCTIONS FOR USE
GENERAL CLASSIFICATION

Do not violate or Federal law to use this product in a manner inconsistent with its labeling.

TSWBSM is used to control algae, bacteria, and fungi in recirculating municipal and industrial water cooling towers. Prior to its use, system must be cleaned to remove algae growth, microbiological slime, and other deposits. An initial slug addition of 1.90 to 4.75 fluid ounces of TSWBSM per 1000 gallons of water to provide a concentration of 16 to 40 ppm of TSWBSM based on the total weight of water in the system is recommended. Repeat initial dosage until control is evident.

Subsequent slug additions of 0.47 to 4.75 fluid ounces of TSWBSM per 1000 gallons of water (4 to 40 parts per million of TSWBSM) should be employed every 2 to 5 days, or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the contamination problem. All slug additions should be made in the sump of the water cooling tower.

TSWBSM is used to control bacteria in industrial air washing systems that maintain the type of the mechanical components. Prior to its use, systems should be cleaned to remove bacterial slime and other deposits. A slug addition of 1.90 to 4.75 fluid ounces of TSWBSM per 1000 gallons of water to provide a concentration of 16 to 40 ppm of TSWBSM is recommended. Repeat initial dosage until control is evident. Subsequent slug additions of 0.47 to 4.75 fluid ounces of TSWBSM per 1000 gallons of water (4 to 40 parts per million of TSWBSM) should be made every 2 to 5 days, or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the contamination problem. All slug additions should be made to the sump of the air washing system.

ACTIVE INGREDIENT

Poly[oxyethylene (dimethylamino) ethylene (dimethylamino) ethylene] dichloride

INERT INGREDIENT

This product contains 20% active ingredient and weighs 8.90 lbs per gallon.

KEEP OUT OF REACH OF CHILDREN

CAUTION

HAZARD STATEMENT

CAUTION: Irritant to eyes.

FIRST AID: Wash eyes with plenty of water for at least 15 minutes.

ENVIRONMENTAL: Do not release into the environment.

Other information: See MSDS for full details.

Approved by: [Signature]

Do not use in residential areas. Do not use in areas where the presence of equipment is critical to the safety of the community. Do not use in areas where the presence of equipment is critical to the safety of the community.