

ZINC NAPHTHENATE

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS (AND DOMESTIC ANIMALS)

WARNING: May be fatal if swallowed, (inhaled or absorbed through the skin). Do not breath vapors. Causes eye irritation. Do not get in eyes, on skin or on clothing. In case of contact, immediately flush eyes or skin with plenty of water. If swallowed, do not induce vomiting. CALL PHYSICIAN IMMEDIATELY.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water, in areas where surface water is present or to intertidal areas below the mean high water mark. Do not contaminate water when disposing of equipment washwaters.

PHYSICAL OR CHEMICAL HAZARDS

Do not use or store near heat or open flame. Use with adequate ventilation. Avoid breathing vapors.

STATEMENTS OF PRACTICAL TREATMENT

- If swallowed, do not induce vomiting. Call physician immediately.
- If splashed in eyes, flush with clean water for 15 minutes and contact a physician.
- In case of skin contact, remove the product from the skin promptly by washing with vegetable oil or hand degreaser and then with soap and water.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

WOOD PRESERVATIVE FOR CONTROL OF FUNGAL ROT AND DECAY

Zinc Naphthenate is designed to be used to treat exterior millwork, door and window sash components, outdoor furniture components prior to topcoating and siding for above ground applications.

PRESERVATIVE FOR TEXTILES AND WOOD

Active Ingredient:

Zinc Naphthenate* 69%

Inert Ingredient: 31%

Total 100%

*Zinc as metal 8%

KEEP OUT OF REACH OF CHILDREN

WARNING

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

EPA Reg. No. 43437-3

EPA Est. No. 43437-CN-1

Net Wt: 185 Kg. 418 lbs.

DIRECTIONS FOR USE (cont'd)

Blend one (1) part by volume of 8% Zinc Naphthenate with 3 volumes of Aliphatic Hydrocarbon Reducing Solvent when applying by dip or brush method to wood such as fence posts, patio decking, ladders, millwork, greenhouse benches and similar items. Treatment of fence posts or other wood that will be in contact with soil must be soaked for a period of 12 to 48 hours. Lumber and other structural members not to be placed in contact with soil should be immersed for a period of 3 minutes per inch of thickness or receive two or more coats by brush or spray. All lumber to be treated should be free of bark, dry, and well seasoned. After treatment the wood should be drained of excess solution and allowed to air dry until all solvent has evaporated and the wood is free of solvent odor.

For pressure treaters (double vacuum) a 0.3% to 1.0% zinc solution by weight is recommended. This required concentration may vary depending on the process used, wood species and the desired retention level.

TEXTILE PRESERVATIVE FOR FUNGAL ROT

In heavy duty textiles such as tents, truck and boat covers, and cotton duck, it is recommended that 0.8% to 1.2% zinc by weight be deposited in the treated fabric. Deposition depends on severity of exposure and degree of protection required. The preservative is normally applied in combination with waterproofing, fire retardants and pigments.

STORAGE AND DISPOSAL

Pesticide Disposal: Rinse the emptied container thoroughly and use the rinsings for treatment. Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal site.

Container Disposal: Triple rinse and offer for recycling or reconditioning or puncture and dispose of in a sanitary landfill, or by other procedures approved by state or local authorities.


Prohibitions: Do not contaminate water, food or feed by storage or disposal.



Dussek Campbell Limited

A Burmah Castrol Company

PO Box 385, 30 Dussek Street
Belleville, Ontario K8N 5A2

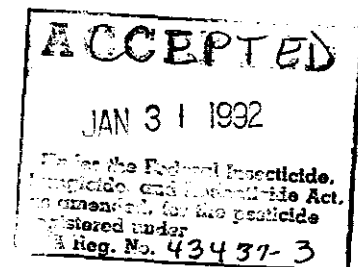

43437-3

01/31/1992

1/1