

IPC 8915

Controls bacteria, fungi, and algae in industrial recirculating water cooling towers; controls bacteria and fungi, in metalworking fluids containing water; controls slime-forming bacteria and sulfate reducing bacteria in oil field waters; controls bacteria and fungal slime in papermills; and controls bacteria, fungi, and algae in industrial air-washer systems.

ACTIVE INGREDIENTS:

5-Chloro-2-methyl-4-isothiazolin-3-one	1.15%
2-Methyl-4-isothiazolin-3-one	
INERT INGREDIENTS:	
TOTAL	

EPA REGISTRATION NO. 43692-4 EPA ESTABLISHMENT NO. 43692-TX-01, 43692-CA-01, 707-PA-1

Manufactured For

ChemLink, Inc.

1500 Market Street P 0 Box 7258 Philadelphia, Pennsylvania 19101 Business Telephone 215-557-2229 Emergency Telephone (24 hours), 800-424-9300 or 215-353-8300

CONTINUOUS FEED METHOD

INITIAL DOSE: When the system is just noticeably fouled, apply 148 to 883 ppm IPC 8915 (1.26 to 7.46 pounds or 19 to 113 fluid ounces of IPC 8915 per 1000 gallons of water in the system).

SUBSEQUENT DOSE: Maintain this treatment level by adding a continuous feed of 35 to 219 ppm (0.3 to 1.86 pounds or 4.5 to 28 fluid ounces of IPC 8915 per 1000 gallons of makeup water)

Badly fouled systems must be cleaned before initial treatment NOTE: For use only in industrial air washing systems that maintain effective mist eliminating components.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS & DOMESTIC ANIMALS DANGER:

CORROSIVE.

CAUSES EYE DAMAGE AND SKIN BURNS.
MAY CAUSE ALLERGIC SKIN REACTION.
MAY BE HARMFUL IF INHALED.
MAY BE FATAL IF SWALLOWED OR ABSORBED THROUGH THE SKIN.

Do not get in eyes, on skin, on clothing. Wear goggles or face shield and rubber gloves when handling. Avoid breathing vapor or mist. Avoid contamination of food. Do not take internally. Wash thoroughly after handling.

ENVIRONMENTAL HAZARDS

C

t!

С


e

ţ٢

ti

rı

This pesticide is toxic to fish and wildlife. Do not discharge into lakes, streams, ponds or public waters unless in accordance with an NPDES permit. For guidance, contact your Regional Office of the EPA. Do not contaminate water by cleaning of equipment or disposal of waste. Apply this pesticide only as specified on this label.



2

eably fouled, apply ds or 19 to 113 fluid r in the system) level by adding a 36 pounds or 4.5 to of makeup water). e initial treatment

systems that main-

TIENTS TIC ANIMALS

ROUGH THE SKIN.

Wear goggles or face twoid breathing vapor o not take internally.

ARDS

Do not discharge into unless in accordance cntact your Regional water by cleaning of his pesticide only as

KEEP OUT OF REACH OF CHILDREN DANGER

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Do not induce vomiting. Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water Avoid alcohol. Call a physician immediately.

IF INHALED: Remove immediately to fresh air. If not breathing apply artificial respiration. If breathing is difficult, give oxygen. Call a physician.

IF ON SKIN: Wash thoroughly with soap and water Remove and wash contaminated clothing before reuse.

IF IN EYES: Flush with plenty of water for at least 15 minutes.


Call a physician.

NOTE TO PHYSICIAN:

Probable mucosal damage may contraindicate the use of gas-ric lavage. Measures against circulatory shock, respiratory depression and convulsions may be needed.

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

NOTICE: Seller warrants that the product conforms to its chemical description and is reasonably fit for the purpose stated on the label when used in accordance with directions under normal conditions of use, but neither this warranty nor any other warranty of merchantability or fitness for a particular purpose, express or implied, extends to the use, storage or handling of this product in a manner other than as directed by label instructions, or under abnormal conditions or under conditions not reasonably foreseeable to seller, and buyer assumes the risk of any such use.

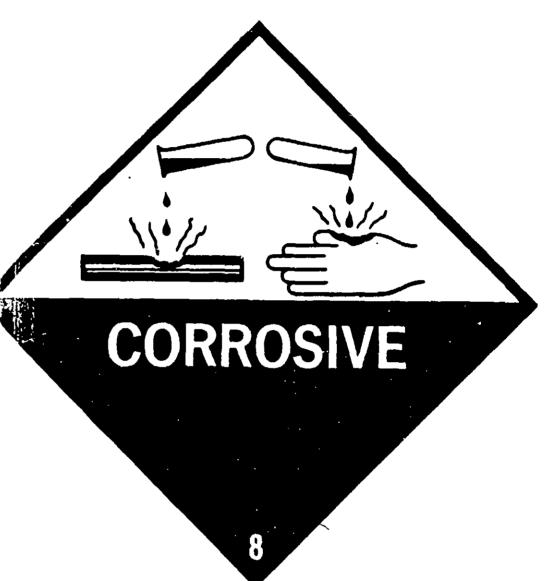

WATER TREATMENT COMPOUNDS, LIQUID. CORROSIVE MATERIAL, NA1760

Net Weights - 30 gal/240 lbs. 55 gal/460 lbs.

