

**PRECAUTIONARY STATEMENT  
HAZARDS TO HUMANS & DOMESTIC ANIMALS**

**CAUTION**

Harmful if swallowed, inhaled or absorbed through the skin. Avoid breathing spray mist. Avoid contact with skin, eyes or clothing. Wash thoroughly with soap and water after handling and before eating. Remove contaminated clothing and wash before reuse.

**ENVIRONMENTAL HAZARDS**

Do not apply directly to water. Do not contaminate water when disposing of equipment washwaters. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

**STORAGE AND DISPOSAL**

Store in original container in a cool, dry place.

**PESTICIDE DISPOSAL**

Do not contaminate water, food or feed by storage or disposal. Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA regional office for guidance.


**CONTAINER DISPOSAL**

Triple rinse (or equivalent) then offer for recycling or reconditioning or puncture and dispose of in a sanitary landfill or by other procedures approved by State and Local authorities.

<sup>TM</sup>Trademark of Janssen Pharmaceutica

\*Active Ingredient and formulation is manufactured by Janssen Pharmaceutica, Beerse, Belgium.

PPD 97/03/U.S.A.

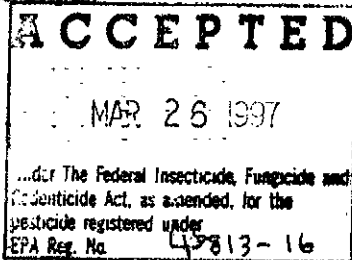

Janssen Pharmaceutica

**WOCOSEN™ 250EC**

Industrial Preservative

Preservative for lumber, cooling towers, metalworking cutting fluids, coatings, caulks, sealants, adhesives and inks.

**ACTIVE INGREDIENT: (w/w)**

**PROPICONAZOLE\*:**

1-[[2-(2,4-dichlorophenyl)-4-propyl-1,3-dioxolan-2-yl]methyl]-1H-1,2,4-triazole . . . . . 23.6%

**INERT INGREDIENTS: (w/w) . . . . . 76.4%**

Product weight: 8.85 lbs./gal. 1.06 kg/l

**KEEP OUT OF REACH OF CHILDREN**

**CAUTION**

**STATEMENT OF PRACTICAL TREATMENT**

**IF SWALLOWED:** Drink 1 or 2 glasses of water and induce vomiting by touching in back of throat with finger. Do not induce vomiting or give anything by mouth to an unconscious person. Treat symptomatically. Seek medical attention.

**IF IN EYES:** Hold eyelids open and flush immediately with a steady gentle stream of water for at least 15 minutes. Get medical attention if irritation persists.

**IF ON SKIN:** Immediately flush exposed area with plenty of water. Remove contaminated clothing. Wash thoroughly with soap and water. Get medical attention if irritation persists.

**IF INHALED:** Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

**NET CONTENTS: 52.8 gallons (200 liters)**

EPA REG. NO. 43813-16  
EPA EST. NO. 43813-BL-2



**JANSSEN**  
Pharmaceutica  
1125 Trenton-Harbourton Rd.  
Titusville, NJ 08560-0200  
U.S.A. (609) 730-2807

**DIRECTIONS FOR USE**

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

**SAPSTAIN AND MOLD CONTROL:**

Wocosen 250EC is used to control sapstain and mold in freshly cut hardwood and softwood lumber, logs, poles, posts and timbers. Wocosen 250EC is applied by dipping or spraying the wood until complete surface wetting is achieved. For bulk dip tanks Wocosen 250EC is diluted by using 0.13 gallons (1 gallon Wocosen 250EC in 800 gallons water) to 1 gallon Wocosen 250EC in 100 gallons of water. Agitate vigorously until completely dispersed. For conventional spray systems a 0.25% to 2% Wocosen 250EC spray solution is used. For example, in a 100 gallon day tank, 0.25 to 2 gallons of Wocosen 250EC are added to the day tank and then enough water is added to bring the total volume up to 100 gallons of solution. In electrostatic spray applications, Wocosen 250 EC dilution is not required, treatment strength is varied by number of application nozzles used and line speed. Rates, for all applications used, will vary according to temperature, humidity, wood moisture, storage conditions, etc. Contact your local Wocosen 250EC product representative for application advice.

Remove sawdust and other debris from treating solution on a regular basis to maintain correct concentration of Wocosen 250EC in application solution. To prevent fungal attack below the surface of the wood, freshly sawn lumber should be treated within 24 hours. Treated lumber should be protected from rain and removed from direct soil/ground contact.

**METALWORKING FLUIDS:**

Use Wocosen 250EC to inhibit fungal degradation of water based and water emulsifiable cutting fluids and coolants used in metalworking operations. Add Wocosen 250EC to the fluid concentrate or to the diluted metalworking fluid in an amount which will provide 50 to 700 ppm active ingredient in the diluted fluid.

**COOLING TOWER WOOD:**

Use Wocosen 250EC to protect cooling tower wood against surface rot and internal or dry rot. Apply by spraying or painting a solution containing 0.5% to 1.1% Wocosen 250EC in water onto the clean wood surfaces. The amount applied should provide 0.23 to 0.46 pounds Wocosen 250EC per 1000 sq. ft. of wood surface. Surface rot can also be inhibited by a

20/2

periodic shock dose of Wocosen 250EC to the recirculating cooling water at the tower basin or cold well. The dosage should provide 1.7 pounds of Wocosen 250EC per 1000 gal. of water and the bleedoff should be stopped for 4 to 6 hrs. after treatment. The shock treatment should be repeated every four months.

**COATINGS, CAULKS, SEALANTS, ADHESIVES, AND INKS:**

Not for use in coatings and adhesives which will come in contact with paper or paperboard.

Sufficient mixing to ensure adequate dispersion of the biocide is required. Wocosen 250EC should be used at levels between 0.2 and 5.0% based on the total weight of the formulation to inhibit fungal disfigurement and deterioration. For solvent-based formulations, Wocosen 250EC can be dissolved in aromatic solvents or combination of aromatic and aliphatic solvents and added in the letdown or added directly to the finished product. For water-thinned latex emulsion formulation, Wocosen 250EC can be premixed with the wetting agent and added to the pigment slurry or simply added to the let down or finished product.

**NOTICE OF WARRANTY**

Janssen Pharmaceutica warrants that this product conforms to the chemical description on the label thereof and is reasonably fit for purposes stated on such label only when used in accordance with the directions under normal use conditions. It is impossible to eliminate all risks inherently associated with the use of this product. Ineffectiveness or other unintended consequences may result because of such factors as weather conditions, presence of other materials, or the manner of use or application, all of which are beyond the control of Janssen Pharmaceutica. In no case shall Janssen Pharmaceutica be liable for consequential, special or indirect damages resulting from the use or handling of this product. All such risks shall be assumed by the Buyer. JANSSEN PHARMACEUTICA MAKES NO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE NOR ANY OTHER EXPRESS OR IMPLIED WARRANTY EXCEPT AS STATED ABOVE.

**ACCEPTED**  
MAR 26 1997  
Under The Federal Insecticide, Fungicide and  
Herbicide Act, as amended, for the  
pesticide registered under  
EPA Reg. No. 43813-14