


NASH-CHEM PRODUCTS

MBC 115

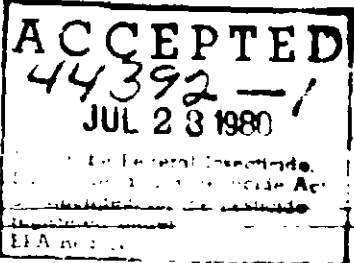

ACTIVE INGREDIENT

poly (oxyethylene (dimethyliminio) ethylene (dimethyliminio) ethylene dichloride)

INERT INGREDIENT

This product contains 1.29% of active ingredient per gallon and weighs 8.58 lb per gallon.

KEEP OUT OF REACH OF CHILDREN

CAUTION

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

CAUTION Harmful if swallowed. Avoid breathing vapors. Avoid contact with skin, eyes, or clothing.

FIRST AID If swallowed, drink promptly a large quantity of milk, egg whites, gelatin solution, or if these are not available, drink large quantities of water. Avoid alcohol. Call a physician immediately.

ENVIRONMENTAL HAZARDS This pesticide is toxic to fish. Keep out of lakes, streams, or ponds. Permits may be required for discharges containing this pesticide into lakes, streams, ponds, or public water. For guidance, contact the regional office of the Environmental Protection Agency.

Directions for Use GENERAL CLASSIFICATION

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

MBC 115 is used to control algae, bacteria, and fungi in water and industrial water cooling towers. Prior to use, the system must be cleaned to remove organic growth, microorganisms, and other deposits. An initial slug addition of 4.8 to 10.0 fluid ounces of **MBC 115** per 1000 gallons

of water to provide a concentration of 32 to 80 parts per million of **MBC 115** based on the total weight of water

in the system is recommended. Repeat initial dosage until control is evident.

Subsequent slug additions of 1.0 to 10.0 fluid ounces of **MBC 115** per 1000 gallons of water (8 to

80 parts per million of **MBC 115**) should be

employed every 2 to 5 days, or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the microbiological problem. Slug additions should be made in the sump of water cooling towers.

MBC 115 is used to control bacteria in industrial

air washing systems that maintain effective mist eliminating components. Prior

to its use, systems should be cleaned to remove bacterial slime and other deposits. An initial slug dose of 14.8 to 24.7 fluid ounces of

MBC 115 per 1000 gallons of water is recom-

ended. Repeat initial dosage until control is evident. Subsequent slug additions of 1.0 to 24.7 fluid ounces of **MBC 115**

per 1000 gallons of water should be employed each 1 to 5 days, or as needed.

The frequency of addition depends upon the relative amount of bleedoff and severity of the bacteria problem. Slug additions may be made to the sump or to the water inlet or trays of the air wash system.

STORAGE & DISPOSAL Keep container closed when not in use. Do not contaminate water, food, or feed by storage, disposal, or cleaning of equipment. Do not reuse empty container. Triple rinse (or equivalent) and dispose of container in an incinerator or in an approved landfill. Do not bury in a safe place. Rinstate that cannot be used or reprocessed should be disposed of in a landfill approved for pesticides or buried in a safe place away from water supplies. Open dumping is prohibited.

Manufactured by

Nashville Chemical & Equipment Company, Inc.
P.O. Box 90246
Nashville, TN 37209

EPA REG. NO.

44392-1

EPA EST. NO.