

ITEM # 5

LABEL FOR NSA BACTERIOSTATIC WATER TREATMENT UNIT MODEL 25 I



**BACTERIOSTATIC  
WATER TREATMENT UNIT**

**CAUTION**

**MODEL 25I**

**KEEP OUT OF REACH OF CHILDREN**

Active Ingredient  
Metallic Silver  
Inert Ingredient

0.1%  
99.9%

REMOVES CHLORINE, BAD TASTE, ODORS AND COLORS. MAKES THE WATER CLEARER AND BETTER TASTING. INHIBITS BACTERIA GROWTH WITHIN THE UNIT. (This unit has a capacity up to 3,000 gallons. It is capable of treating an average of 2.7 gallons of water daily for a period of 36 months. For use only on municipally treated cold tap water in the home. Maximum flow rate 1.0 gallons per minute. See accompanying information sheet for installation instructions.)


EPA Registration No. 44751 J      EPA Establishment No. 44751 TN 1

Net Wt. 1.5 lb

National Safety Associates Inc.  
3637 Park Avenue  
Memphis, TN 38111

CONTENTS ONE BACTERIOSTATIC WATER FILTER

**DISPOSAL - WRAP IN PAPER AND DISCARD WITH TRASH**

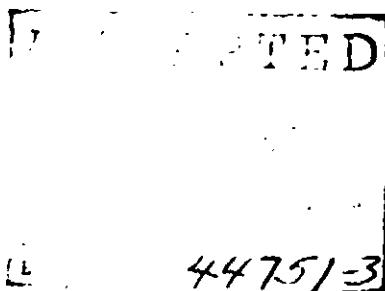

INSTALLATION INSTRUCTIONS FOR  
NSA BACTERIOSTATIC WATER TREATMENT UNIT MODEL 25I

INSTALLATION INSTRUCTIONS:  
NSA Model 25I

It is a violation of Federal law to  
use this product in a manner in-  
consistent with its labeling.

- 1) Flush new unit with cold water  
(3-5 minutes) prior to installa-  
tion (until no evidence of carbon  
dust exists)
- 2) **SHUT OFF WATER SUPPLY.**
- 3) Cut water line leaving space for  
25I unit (Smooth cut-off ends  
using sandpaper or file)
- 4) Remove nuts and ferrules (small  
sleeves in nuts) from both ends  
of the 25I unit. Slide nut first and  
then ferrule onto each end of  
tubing (If your water line is plas-  
tic instead of copper, insert the  
enclosed tubular adaptors into  
each end of the plastic tubing)
- 5) Insert inlet tubing into the top  
opening on the 25I unit. Slide  
ferrule and nut down and tighten  
the nut securely. Insert the outlet  
tubing into the bottom opening  
and repeat the tightening pro-  
cedure
- 6) Turn on water supply and check  
for leaks

Note This unit is most effective if  
installed in an upright (verti-  
cal) position. It is de-  
signed for use on home  
refrigerator ICE-MAKERS.

