

# Finest Quality

## 8196 Clear

# Paintable Wood Preservative

CLEAR  
PENETRATING  
WATER REPELLENT  
PAINTABLE  
WOOD PRESERVATIVE

RECOMMENDED  
TO PROTECT  
ABOVE-GROUND  
EXTERIOR WOOD  
AGAINST  
WOOD ROT, MILDEW,  
AND WATER DAMAGE

KEEP OUT OF REACH OF CHILDREN

### WARNING


SEE SIDE PANEL FOR ADDITIONAL  
PRECAUTIONARY STATEMENTS

ACTIVE INGREDIENT	
Zinc Naphthenate	15%
(Equivalent to 2% Zinc metal)	
INERT INGREDIENTS	85%
Total	100%

EPA Reg. No. 44873-1

## 1 Gallon (3.785 Liters)

# Color Your World®

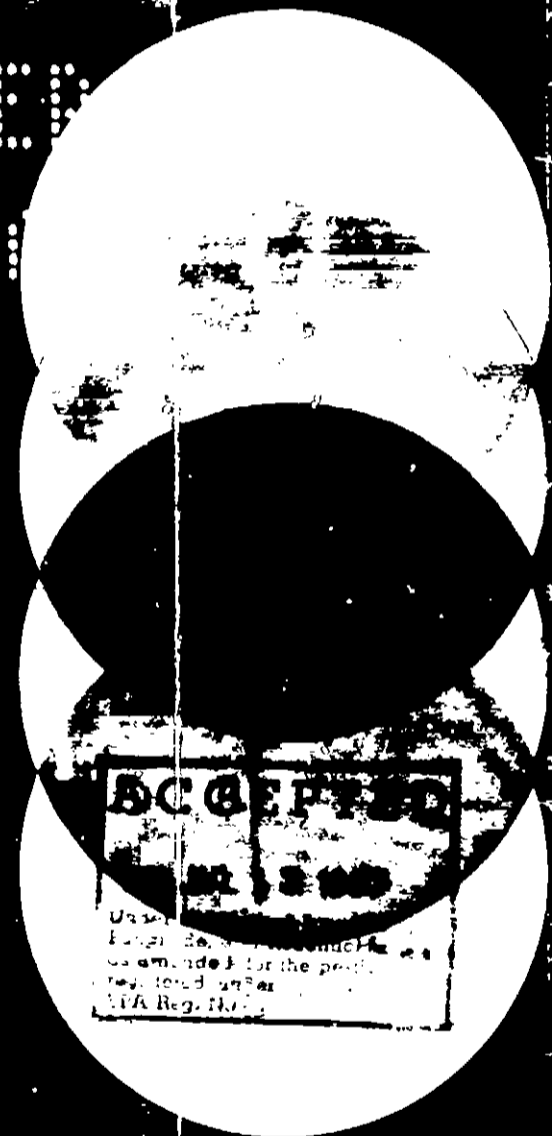

**PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS AND  
DOMESTIC ANIMALS  
WARNING**

Contains petroleum distillates. Harmful if swallowed. May be absorbed through the skin. Causes skin irritation. Avoid breathing vapor or spray mist. Use in well ventilated area. Avoid contact with skin, eyes or clothing.

Note to User - Do not use in enclosed spaces.

**FIRST AID**

In case of contact, immediately remove contaminated clothing and wash skin with soap and water. In case of eye contact, flush with plenty of water and get medical attention. If swallowed, do not induce vomiting. Call physician immediately.

**ENVIRONMENTAL HAZARDS**

This product is toxic to fish. Do not apply directly to lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label.

**PHYSICAL OR CHEMICAL HAZARDS**

COMBUSTIBLE MIXTURE. DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME.

**DIRECTIONS FOR USE**

It is a violation of Federal law to use this product in a manner inconsistent with its labelling.

Color Your World Paintable Wood Preservative is effective against wood rot, mildew and water damage, for bare wood surfaces above the ground line, especially wood subject to dampness such as house siding, doors, roofs, fences, decks. Will not crack, chip, blister or peel. Lets the wood weather naturally, resulting in a darkening or graying of the wood surface, depending on the type of wood and of exposure.

**USE PRECAUTION**

Do not use on interior wood.

**SURFACE PREPARATION**

Wood must be dry, and free from mildew or any other finish. Remove bark.

**HOW TO APPLY**

For above-ground surfaces: **STIR THOROUGHLY.** Do not thin. Product in the can is ready to use. Apply generously by brush, spray or d.o. Thoroughly cover and soak cut end grain. The more preservative that the wood absorbs, the greater will be the protection of the product.

**DRY TIME**

Dries in 24 to 36 hours. Second coat may be applied within one hour of first coat.

**TO OVERCOAT WITH PAINT**

**FOR SURFACES TO BE PAINTED** Apply one coat of Paintable Wood Preservative. Let dry 24 hours before painting. Before applying top coat, prime with No. 5690 Exterior Oil-base Primer.

**NOTE TO USER** Do not apply a latex paint directly over Paintable Wood Preservative.

**FOR UNPAINTED SURFACES** For best protection, two coats are recommended. Repeat treatment every 2 to 3 years to maintain utmost effectiveness.

**FOR MILDEWED SURFACES** Do not apply Paintable Wood Preservative to mildewed surfaces. To test for mildew, wet wood with household bleach. If area lightens in color, mildew is present. To remove mildew, wash with a solution of 1 quart of household bleach to 3 quarts of water. Let stand 30 minutes, then rinse with clean water. Dry thoroughly before applying Paintable Wood Preservative.

**COVERAGE**

One gallon covers 200 to 400 square feet, depending on porosity of the wood.

Application is beyond manufacturer's control. Liability, if any, is limited to replacement of product only.

**COLOR YOUR WORLD (N.Y.) INC.**  
Head Office and Factory,  
515 Lee Rd., ROCHESTER, N.Y. 14606

**STORAGE AND DISPOSAL**

**STORAGE** Do not use or store near heat or open flame. Avoid storage near feed or food products.

**DISPOSAL** Do not re-use empty container. Destroy it by perforating or crushing. Bury or discard in safe place.

**Color Your World**

Reg. U.S. Pat. & TM Off.