

BEGIN SIDE PANEL

Net Contents  
1 Gallon  
U.S. Measure  
3.785 Liters

NEW NAUTICAL  
COATINGS, INC.  
2181-34<sup>th</sup> Way  
Largo, FL 33771

EPA  
12 79

END SIDE PANEL

BEGIN FRONT PANEL

**Restricted Use Pesticide:** Due to toxicity to aquatic organisms, including shellfish. For sale only to certified applicators and for use only by persons under the direct supervision of an on-site (at the work site) certified commercial applicator. These restrictions became effective March 1, 1990.

Sea  
Hawk  
Yacht Finishes

(Picture of Sea Hawk)

**ACCEPTED**  
JAN 11 2000  
Under the Federal Insecticide, Fungicide, and  
Rodenticide Act as amended, for the  
pesticide, registered under  
EPA Reg. No. 44891-6

PREMIUM QUALITY

44891-6

11/1/2000

Page 1 of 4

# BIOCOP

Self Polishing, Anti-Fouling Bottom Paint

EPA

10 700

**ACTIVE INGREDIENTS:**

Cuprous Oxide ..... 34.59%

Tributyltin Methacrylate (as part of polymer) .... 10.53%

**INERT INGREDIENTS:** ..... 54.88%

**TOTAL** ..... 100.00%

Total Tin Content 3.37%  
Copper expressed as metallic 30.69%

Contains Petroleum Distillates.  
**THIS PRODUCT CONTAINS THE TOXIC  
INERT TRIBUTYL TIN OXIDE**

**KEEP OUT OF REACH OF CHILDREN**

**DANGER**

**SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.**

**LIMITED WARRANTY:** The manufacturer warrants all material sold by it against defects in the material. The manufacturer's liability under the sale and warranty of this material shall in any case be limited to replacement of material only. The manufacturer makes no other warranty for this product, expressed or implied.

END FRONT PANEL

BEGIN BACK PANEL

**DIRECTIONS FOR USE**

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**GENERAL DESCRIPTION**

Biocop is a multi-year, high-performance copolymer antifoulant with a blend of TBT and copper. For use on fiberglass and steel vessels. Provides protection against attack by barnacles, algae, and other fouling organisms in salt air. Biocop provides multi-season protection even in the most torrid tropical waters. For use on vessels greater than 82 feet (25 meters) in length. It is unlawful to use this product on non-aluminum hulled vessels less than 82 feet (25 meters) in length (on deck) except for the outboard motor or lower drive unit of such vessel. Users must comply with all applicable OSHA requirements.

During and after paint removal and/or application of new TBT paint, methods must be employed which are designed to prevent release of TBT paints into the aquatic environment. Following removal of old TBT paint and/or application of new TBT paint, all paint chips and spent abrasives, paint containers, unused paint, and any other waste products from paint removal or application must be disposed of in a sanitary landfill.

**ACCEPTED**

JAN 11 2000

Under the Federal Insecticide, Fungicide, and  
Rodenticide Act as amended, for the  
pesticide, registered under  
EPA Reg. No. 44891-6

h k c

SHAKE VIGOROUSLY FOR A MINIMUM OF 10 MINUTES BEFORE APPLICATION

**PRODUCT INFORMATION**

Finish/Sheen: Semi-Gloss  
Converter: One Pack  
TBT/Copper Content: 10.53%/34.59%  
Volume Solids: 42% ± 2%  
Mix Ratio: One Pack  
Shipping Weight: 14 Lbs./Gal.  
Flash Point: 80°F  
Film Thickness: 6 mils wet equals 2.5 dry per coat  
Recommended Coats: 2 on entire hull and 3 at waterline  
Theoretical Coverage: 267 Sq. Ft./Gal. @ recommended film thickness

**APPLICATION DETAILS**

Method: Brush, roller or spray  
Thinner: 2033-2035  
Cleaner: Sea Hawk Xylene 7130

**Overcoating Interval**

**Drying Time (Hrs)**

Substrate Temp.	Touch	Min.	Max.	Launch
73°F (23°C)	3 Hrs	1 Hr	N/A	12 Hrs
95°F (35°C)	1 Hr	1 Hr	N/A	12 Hrs

**REGULATORY DATA**

VOC: 418 Grams/Liter

**LIMITATIONS:** Apply in good weather when air and surface temperature are above 50°F (10°C). Surface temperature must be at least 50°F (10°C) above dew point. For optimum application properties, bring material to 70-80°F (21-27°C) temperature range prior to mixing and application. Unmixed material (in closed containers) should be maintained in protected storage between 40 and 100°F (4-38°C). Prolonged atmospheric exposure of this product may detract from performance. Technical and application data herein is for the purpose of establishing a general guideline for the coating and the proper coating application procedures. As application, environmental and design factors can vary significantly, due care should be exercised in the selection, verification of performance, and use of the coating.

**SURFACE PREPARATION:** Paint only clean, dry surfaces. Remove all grease, oil, wax, or other foreign material by solvent or detergent washing. (SSPC -SPI)

**New Construction:** As yard procedures may vary, consult with your Sea Hawk Representative.

**APPLICATION:** Apply by brush, roller or spray. Apply 6 mils wet, which will yield 2.5 mils dry per coat.

**EQUIPMENT**

Brush: China Bristle

Roller: Solvent Resistant Roller Cover 3/8" pile smooth to medium. Prewash Roller Cover to remove loose fibers prior to use.

Airless Spray: Minimum 28:1 ratio pump; 0.21-0.26" (533-660 microns) orifice tip; 3/8" ID high-pressure material hose; 90 PSI line pressure; 60 mesh tip filter.

**THINNING:** We do not recommend thinning. However, if thinning is necessary, thin up to a maximum of 10%, with Sea Hawk 2033-2035 only.

**CLEANUP:** Clean all equipment immediately after use with xylene. It is good practice to periodically flush out spray equipment during the course of the day. Frequency depends upon the amount sprayed, temperature, elapsed time including delay, etc.

**SAFETY:** Read and observe all precautionary statements on this label.


**PRECAUTIONARY STATEMENTS**

**HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

**DANGER.** Corrosive. Causes skin burns. May be fatal if swallowed. Harmful if absorbed through skin or inhaled. Cause moderate eye irritation. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Do not get in eyes or clothing. Avoid contact with skin, eyes or clothing. Avoid breathing vapor, spray mist, or dust or chips from sanding. Wear protective clothing (long-sleeved cotton shirt, long pants and hat) and gloves (such as nitrile or butyl). Wash thoroughly with soap and water after handling and before eating, drinking or using tobacco. Remove contaminated clothing and wash before reuse. Use with adequate ventilation.

EPA

10 7 00

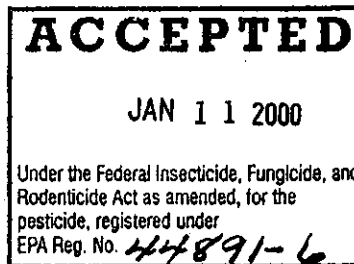

3  
4  
E

## ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply directly to water by cleaning of equipment or disposing of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

## PHYSICAL AND CHEMICAL HAZARDS

Flammable. Keep away from heat and open flame.

## STATEMENT OF PRACTICAL TREATMENT

**IF ON SKIN:** Wash with plenty of soap and water. Get medical attention.

**IF SWALLOWED:** Call a physician or Poison Control Center. Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. If person is unconscious, do not give anything by mouth and do not induce vomiting.

**IF INHALED:** Remove victim to fresh air. If victim is not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

**IF IN EYES:** Flush with plenty of water. Call a physician if irritation persists.

**Note to Physician:** Probable mucosal damage may contraindicate the use of gastric lavage.

## STORAGE AND DISPOSAL

Do not contaminate food, feed or water by storage or disposal.

**STORAGE:** Do not store near heat or open flame. Store below 100°F/38°C. Store in well ventilated area.

**PESTICIDE DISPOSAL:** Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by the use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

**CONTAINER DISPOSAL:** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

EPA Registration Number 44891-6

EPA Establishment Number 44891-FL-1

END BACK PANEL

**ACCEPTED**

JAN 11 2000

Under the Federal Insecticide, Fungicide, and  
Rodenticide Act as amended, for the  
pesticide, registered under  
EPA Reg. No. 44891-6

424