

44891-6

12-04-2003

1/7



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

WASHINGTON, D.C. 20460

DEC 04 2003

OFFICE OF
PREVENTION, PESTICIDES
AND TOXIC SUBSTANCES

Ms. Marla Jackson
Agent for,
New Nautical Coatings, Inc.
14805 49 Street North
Clearwater, Florida 33762

Mail to: Michael A. Jackson
Brazos Associates, Inc.
1806 Auburn Drive
Carrollton, TX 75007-1451

Subject: Sea Hawk Biocop 1230 Blue Self Polishing Anti-Fouling Coating
EPA Registration Number 44891-6
Your Amendment Dated October 27th, 2003
EPA Received Date October 28th, 2003

The amendment referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA), as amended, to revise the product labeling as per our letter of August 5th, 2003, is acceptable.

A stamped copy of the labeling is enclosed for your records.

If you have any questions concerning this letter, please contact Karen M. Leavy-Munk at (703)-308-6237.

Sincerely,

A handwritten signature in cursive script that reads "M Swindell".

Marshall Swindell
Product Manager 33
Regulatory Management Branch I
Antimicrobial Division

2/7

[FRONT PANEL]

RESTRICTED USE PESTICIDE: Due to toxicity to aquatic organisms, including shellfish. For sale only to certified applicators and for use only by persons under the direct supervision of an on-site (at the work site) certified commercial applicator. These restrictions became effective March 1, 1990.

Sea Hawk

(Picture of Sea Hawk here)

Yacht Finishes

PREMIUM QUALITY

BIOCOP 1230

Blue Self Polishing, Anti-Fouling Coating

ACCEPTED

DEC 04 2008

Under the Federal Insecticide, Fungicide and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. 44891-6

[Optional proposed text appears in brackets - the final label may include some or all of the optional text]

[Paint Color and Number]

ACTIVE INGREDIENTS:	
Cuprous Oxide	34.59%
Tributyltin Methacrylate (as part of polymer)	10.53%
OTHER INGREDIENTS*:	<u>54.88%</u>
TOTAL:	100.00%
Total Tin Content 3.37%	
Copper expressed as metallic 30.69%	
*Contains Petroleum Distillates	
THIS PRODUCT CONTAINS THE TOXIC INERT TRIBUTYL TIN OXIDE	

4/7

[BACK PANEL]

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

GENERAL DESCRIPTION


Biocop is a multi-year, high-performance copolymer antifoulant with a blend of TBT and copper. For use on fiberglass and steel vessels. Provides protection against attack by barnacles, algae, and other fouling organisms in salt air. Biocop provides multi-season protection even in the most torrid tropical waters. For use on vessels greater than 82 feet (25 meters) in length. It is unlawful to use this product on non-aluminum hulled vessels less than 82 feet (25 meters) in length (on deck) except for the outboard motor or lower drive unit of such vessel. Users must comply with all applicable OSHA requirements.

During and after paint removal and/or application of new TBT paint, methods must be employed which are designed to prevent release of TBT paints into the aquatic environment. Following removal of old TBT paint and/or application of new TBT paint, all paint chips and spent abrasives, paint containers, unused paint, and any other waste products from paint removal or application must be disposed of in a sanitary landfill.

SHAKE VIGOROUSLY FOR A MINIMUM OF 10 MINUTES BEFORE APPLICATION

PRODUCT INFORMATION


Finish/Sheen:	Semi-Gloss
Converter:	One Pack
TBT/Copper Content:	10.53% / 34.59%
Volume Solids:	42% ± 2%
Mix Ratio:	One Pack
Shipping Weight:	14 Lbs./Gal.
Flash Point:	80° F
Film Thickness:	6 mils wet equals 2.5 dry per coat
Recommended Coats:	2 on entire hull ad 3 at waterline
Theoretical Coverage:	267 Sq. Ft./Gal. @ recommended film thickness

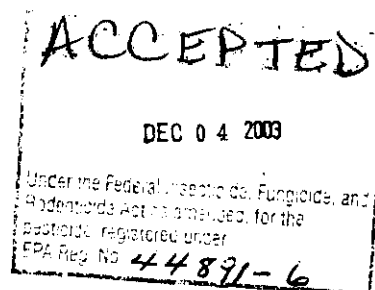

APPLICATION DETAILS

Method:	Brush, roller or spray
Thinner:	2033-2035
Cleaner:	Sea Hawk Xylene 7130

5/9

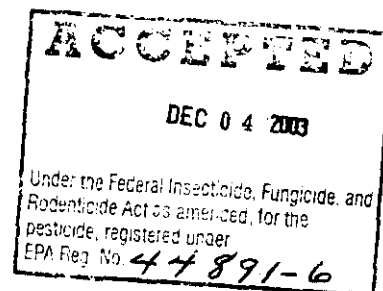

[BACK PANEL CONTINUED]

Overcoating Internal

Drying Time (Hrs)

Substrate Temp.	Touch	Min.	Max.	Launch
73° F (23° C)	3 Hrs	1 Hr	N/A	12 Hrs
95° F (35° C)	1 Hr	1 Hr	N/A	12 Hrs

REGULATORY DATA

VOC: 418 Grams/Liter

LIMITATIONS: Apply in good weather when air and surface temperature are above 50° F (10° C). Surface temperature must be at least 50° F (10° C) above dew point. For optimum application properties, bring material to 70-80° F (21-27° C) temperature range prior to mixing and application. Unmixed material (in closed containers) should be maintained in protected storage between 40 and 100° F (4-38° C). Prolonged atmospheric exposure of this product may detract from performance. Technical and application data herein is for the purpose of establishing a general guideline for the coating and the proper coating application procedures. As application, environmental and design factors can vary significantly, due care should be exercised in the selection, verification of performance, and use of the coating.

SURFACE PREPARATION: Paint only clean, dry surfaces. Remove all grease, oil, wax, or other foreign material by solvent or detergent washing. (SSPC-SPI)

New Construction: As yard procedures may vary, consult with your Sea Hawk Representative.

APPLICATION: Apply by brush, roller or spray. Apply 6 mils wet, which will yield 2.5 mils dry per coat.

EQUIPMENT

Brush: China Bristle

Roller: Solvent Resistant Roller Cover 3/8" pile smooth to medium. Prewash Roller Cover to remove loose fibers prior to use.

Airless Spray: Minimum 28:1 ratio pump; 0.21-0.26" (533-660 microns) orifice tip; 3/8" ID high-pressure material hose; 90 PSI line pressure; 60 mesh tip filter.

THINNING: We do not recommend thinning. However, if thinning is necessary, thin up to a maximum of 10%, with Sea Hawk 2033-2035 only.

CLEANUP: Clean all equipment immediately after use with Sea Hawk Xylene 7130. It is good practice to periodically flush out spray equipment during the course of the day. Frequency depends upon the amount sprayed, temperature, elapsed time including delay, etc.

6/7

ACCEPTED
DEC 04 2003
Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. 44891-6

[BACK PANEL CONTINUED]

SAFETY: Read and observe all precautionary statements on this label.

STORAGE AND DISPOSAL

Do not contaminate food, feed or water by storage or disposal.

STORAGE: Do not store near heat or open flame. Store below 100° F/38° C. Store in well ventilated area.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by the use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

DANGER. Corrosive. Causes skin burns. May be fatal if swallowed. Harmful if absorbed through skin or inhaled. Causes moderate eye irritation. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Do not get in eyes or clothing. Avoid contact with skin, eyes or clothing. Avoid breathing vapor, spray mist, or dust or chips from sanding. Wear protective clothing (long-sleeved cotton shirt, long pants and hat) and gloves (such as nitrile or butyl). Wash thoroughly with soap and water after handling and before eating, drinking or using tobacco. Remove contaminated clothing and wash before reuse. Use with adequate ventilation.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply directly to water by cleaning of equipment or disposing of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL AND CHEMICAL HAZARDS

Flammable. Keep away from heat and open flame.


7/7

[BACK PANEL CONTINUED]

FIRST AID	
If on skin or clothing	• Take off contaminated clothing. • Rinse skin immediately with plenty of water for 15-20 minutes. • Call a poison control center or doctor for treatment advice.
If swallowed	• Immediately call a poison control center or doctor. • Do not induce vomiting unless told to do so by a poison control center or doctor. • Do not give any liquid to the person. • Do not give anything by mouth to an unconscious person.
If inhaled	• Move person to fresh air. • If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible. • Call a poison control center or doctor for further treatment advice.
If in eyes	• Hold eye open and rinse slowly and gently with water for 15-20 minutes. • Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. • Call a poison control center or doctor for treatment advice.
Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact 1-800-528-0997 for emergency medical treatment information.	
NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage. Contains petroleum distillate, vomiting may cause aspiration pneumonia.	

EPA Reg. No. 44891-6

EPA Est. No. 44891-FL-1

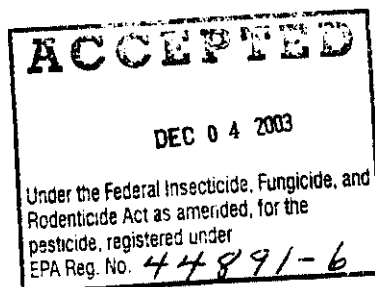

REVISED: 10-27-03

S:AMAINNEW NAUTICAL COATINGS, INC. LABELS/SEA HAWK BIOCOP SELF-POLISHING ANTI-FOULING COATING