

BEGIN SIDE PANEL

Net Contents
1 Gallon
U.S. Measure
3.785 Liters

NEW NAUTICAL
COATINGS, INC.
2181 34th Way
Largo, FL 33771

END SIDE PANEL

BEGIN FRONT PANEL

Sea Hawk

Yacht Finishes

(Picture of Sea Hawk)

Premium Quality

CUKOTE

Anti-Fouling Coating

ACCEPTED
JAN 11 2000
Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under
EPA Reg. No. 44891-7

EPA
12 7 00


44891-7

1/11/2000

page 124

ACTIVE INGREDIENT: Cuprous Oxide ...	47.57%
INERT INGREDIENTS:	52.43%
TOTAL	100.00%

Copper expressed as metallic 42.21%
 Contains Petroleum Distillates
 This product contains toxic inert
 ingredient propylene oxide.



**KEEP OUT OF REACH OF CHILDREN
 DANGER**

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

LIMITED WARRANTY: The manufacturer warrants all material sold by it against defects in the material. The manufacturer's liability under the sale and warranty of this material shall in any case be limited to replacement of material only. The manufacturer makes no other warranty for this product, expressed or implied.

END FRONT PANEL

BEGIN BACK PANEL

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

GENERAL DESCRIPTION

Ablative, self-polishing antifoulant. This product controls barnacles, algae, and other marine organisms. It can be used in both fresh and salt water. This product has a copolymer, biocide release mechanism. The product prevents coating buildup and is able to be hauled without affecting antifouling properties.

SHAKE VIGOROUSLY FOR A MINIMUM OF 10 MINUTES BEFORE APPLICATION

PRODUCT INFORMATION

- Finish/Sheen: Semi-Gloss
- Converter: One Pack
- Copper Content: 47%
- Volume Solids: 54% ± 2%
- Mix Ratio: One Pack
- Shipping Weight: 18-20 Lbs./Gal.
- Flash Point: 80°F
- Film Thickness: 5 mils wet equals 2.7 dry per coat
- Recommended Coats: 2
- Theoretical Coverage: 320 Sq. Ft./Gal. @ recommended film thickness

APPLICATION DETAILS

- Sweat-In Time: Not Applicable
- Thinner: 2033-2035

ACCEPTED

JAN 11 2000

Under the Federal Insecticide, Fungicide, and
 Rodenticide Act as amended, for the
 pesticide, registered under
 EPA Reg. No. 44891-7

h e e

Cleaner: Sea Hawk Xylene 7130

Overcoating Interval

Drying Time (Hrs)

Substrate Temp.	Touch	Min.	Max.	Launch
73°F (23°C)	2 Hrs	1Hr	N/A	12 Hrs
95°F (35°C)	1 Hr	1 Hr	N/A	12 Hrs

Consult with your Sea Hawk representative for the system best suited for surfaces to be protected.

REGULATORY DATA

VOC: 398 Grams/Liter

LIMITATIONS: Apply in good weather when air and surface temperature are above 50°F (10°C). Surface temperature must be at least 50°F (10°C) above dew point. For optimum application properties, bring material to 70-80°F (21-27°C) temperature range prior to mixing and application. Unmixed material (in closed containers) should be maintained in protected storage between 40 and 100°F (4-38°C). Prolonged atmospheric exposure of this product may detract from performance. Technical and application data herein is for the purpose of establishing a general guideline for the coating and the proper coating application procedures. As application, environmental and design factors can vary significantly, due care should be exercised in the selection, verification of performance, and use of the coating.

SURFACE PREPARATION: Paint only clean, dry surfaces. Remove all grease, oil, wax, or other foreign material by solvent or detergent washing. (SSPC - SPI)

New Construction: As yard procedures may vary, consult with your Sea Hawk Representative.

APPLICATION: Apply by brush, roller or spray. Apply 5 mils wet, which will yield 2.7 mils dry per coat.

EQUIPMENT

Brush: China-Bristle



Roller: Solvent Resistant Roller Cover 3/8" pile smooth to medium. Prewash Roller Cover to remove loose fibers prior to use.

Airless Spray: Minimum 28:1 ratio pump; 0.21-0.26" (533-660 microns) orifice tip; 3/8" ID high-pressure material hose; 90 PSI line pressure; 60 mesh tip filter.

THINNING: We do not recommend thinning. However, if thinning is necessary, thin up to a maximum of 10%, with Sea Hawk 2033-2035 only.

CLEANUP: Clean all equipment immediately after use with Sea Hawk Xylene 7130. It is good practice to periodically flush out spray equipment during the course of the day. Frequency depends upon the amount sprayed, temperature, elapsed time including delay, etc.

SAFETY: Read and observe all precautionary statements on this label.

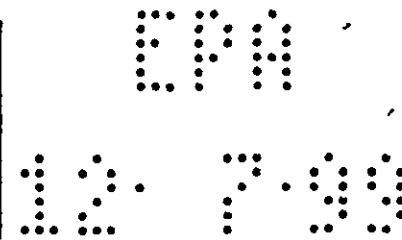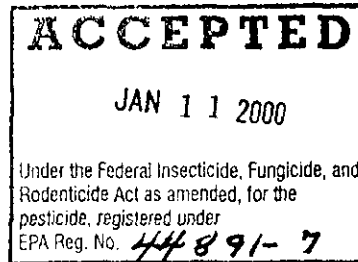

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER. Corrosive. Causes skin burns. May be fatal if swallowed or inhaled. Causes moderate eye irritation. Harmful if absorbed through skin. Do not get in eyes or clothing. Do not breathe, spray mist, or dust or chips from sanding. Avoid contact with skin, eyes or clothing. Wear protective clothing (long-sleeved cotton shirt, long pants and hat) and gloves (such as nitrile or butyl). Wear a mask or pesticide respirator jointly approved by the Mine Safety and Health Administration and the National Institute for Occupational Safety and Health. Wash thoroughly with soap and water after handling and before eating, drinking or using tobacco. Remove contaminated clothing and wash before reuse. Use with adequate ventilation.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply directly to water by cleaning of equipment or disposing of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL AND CHEMICAL HAZARDS

Flammable. Keep away from heat and open flame.

STATEMENT OF PRACTICAL TREATMENT

IF ON SKIN: Wash with plenty of soap and water. Get medical attention.

IF SWALLOWED: Call a physician or Poison Control Center. Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. If person is unconscious, do not give anything by mouth and do not induce vomiting.

IF INHALED: Remove victim to fresh air. If victim is not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

IF IN EYES: Flush with plenty of water. Call a physician if irritation persists.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage.

344

STORAGE AND DISPOSAL

Do not contaminate food, feed or water by storage or disposal.

STORAGE: Do not store near heat or open flame. Store below 100°F/38°C. Store in well-ventilated area.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by the use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

EPA Registration Number 44891-7

EPA Establishment Number 44891-FL-1

END BACK PANEL

ACCEPTED
JAN 11 2000
Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under
EPA Reg. No. 44891-7

5254
464